

	GROUP Electrical	MODEL 2020-2021MY Soul (SK3)
	NUMBER PS661	DATE May 2020



TECHNICAL OPERATIONS


SUBJECT:

BLIND-SPOT COLLISION WARNING (BCW) VARIANT CODING – POSSIBLE C166A87

This Pitstop provides information regarding the Blind-Spot Collision Warning (BCW) system setting a DTC C166A87 after replacing a BCW module on 2020-2021 Soul (SK3) vehicles. After replacement, the BCW (BSD) variant coding needs to be performed using the KDS under S/W Management for the options equipped for that vehicle.

Note: BCW and Rear Cross-Traffic Collision Warning (RCCW) are linked, so one cannot be disabled without the other.

DTC C166A87: CAN Time-Out LDWS/LKAS/MFC/LDW/LKA

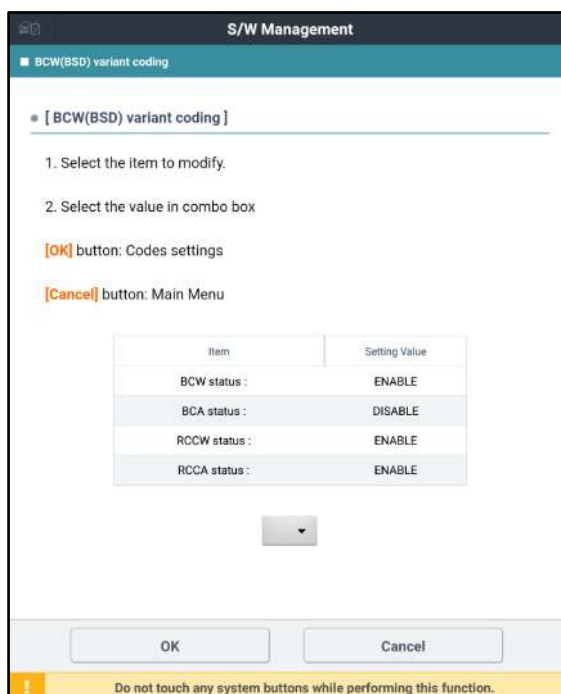

S/W Management

■ BCW(BSD) variant coding

* [BCW(BSD) variant coding]

1. Select the item to modify.

2. Select the value in combo box

[OK] button: Codes settings

[Cancel] button: Main Menu

Item	Setting Value
BCW status :	ENABLE
BCA status :	DISABLE
RCCW status :	ENABLE
RCCA status :	ENABLE

OK Cancel

Do not touch any system buttons while performing this function.

(20MY GT-Line 1.6L-T settings shown above)

System	DTC	Description	State
BCW	C166A87	CAN Time-Out LDWS/LKAS/MFC/LDW/LKA	Active