



STAR ONLINE PUBLICATION



Case Number: S2223000017


Release Date: March 2022

Symptom/Vehicle Issue: FSM Folding Stow Module Replacement Information B235A-00 ECU In Plant Mode

Customer Complaint/Technician Observation: Technician finds the FSM module after replacement has set B235A-00.

Discussion: Following FSM replacement, WiTECH has an additional routine that needs to be run to place the FSM into customer mode. See figure 1 below.

<<<NOTE>>> “Set Plant Mode- Inactive” MUST be run first. Before calibrating the seat.

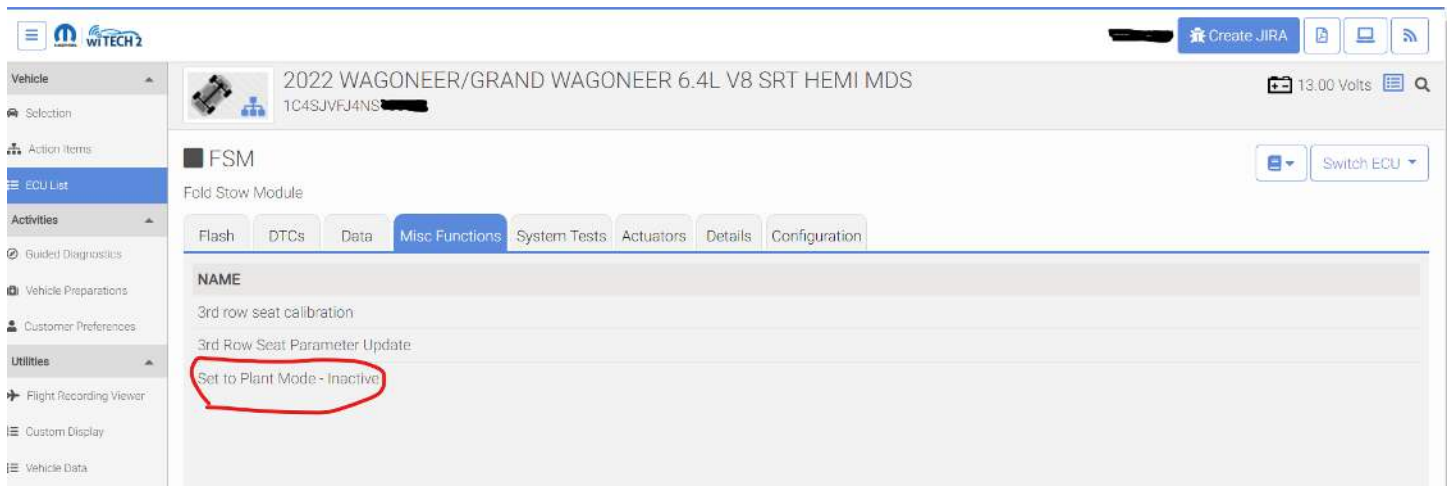

This document does not authorize warranty repairs. This communication documents a record of past experiences. STAR Online does not provide any conclusions about what is wrong with the vehicle. Rather, it captures all previous cases known that appear to be similar or related to the vehicle symptom / condition. You are the expert, and you are responsible for deciding on the appropriate course of action.

Contact STAR Center, or your Technical Assistance Center Via TechCONNECT or eCONTACT ticket if no solution is found