

INTERNATIONAL®



908 C

Vehicle illustrated may include Optional Equipment and does not necessarily include all standard equipment.

RATINGS

MAXIMUM GROSS VEHICLE WEIGHT.....4,000 lbs.

STANDARD EQUIPMENT

AXLE, FRONT

FA-1 2,500-lb capacity
Heat-treated forged-steel I beam

AXLE, REAR

RA-18 3,500-lb capacity
Hypoid single reduction, 8½" ring gear
Semi-floating induction-hardened flanged shafts

Ratios: 3.31, 3.54 or 3.73

BODY

6 ft. 8 in. regular or Bonus-Load pick-up
with inner body tire carrier

BRAKE, PARKING

Mechanical control of rear service brakes
Foot pedal applied, finger lever released
Total lining area: 81.9 sq. inches

BRAKES, SERVICE

Self-adjusting hydraulic, dual operation
with warning light
Single-cylinder, single-piston front,
single-cylinder, double-piston rear
Size: 12 × 2" front, 11 × 1¾" rear
Total area: 179.7 sq. inches

CAB

All steel with safety glass windows
and sweep-around windshield
Door locks both sides with safety latches
Non-glare padded instrument panel with
ammeter, fuel, water temperature and oil
pressure gauges
Full-width adjustable seat with Torflex
spring construction, vinyl upholstery
and polyurethane foam cushion
Acoustical roof headliner

CAB (Continued)

Rubber floor mat with sound deadening
insulation; seat belts and shoulder
harness anchors
Fresh air heater and defroster
Padded sun visor for driver
Ash tray; hand choke
Two-speed non-glare electric windshield
wipers and electric washers
Chrome door mounted and inside rear
view mirrors

CLUTCH

10-inch 9-spring, single-plate
Hydraulic control; vibration dampener

COOLING SYSTEM

20-quart system capacity
Radiator frontal area: 497 sq. inches
Permanent type anti-freeze—20°F

ELECTRICAL SYSTEM

12-volt 32-amp alternator
50 amp-hr, 54 plate battery
Fuse panel in glove compartment
Dual stop and tail lights
Dome light; single electric horn
Directional signals: front in parking
lights, rear in stop lights
Traffic hazard switch
Back-up lights
Front side marker lamps

ENGINE

International V-266 gasoline, V-8
Gross BHP: 154.8 @ 4400 rpm
Gross torque: 227.1 lb/ft @ 2800 rpm
266 cu. in. displmt; 8.4 comp ratio

ENGINE (Continued)

Dry-type air cleaner; full-flow oil filter
Exhaust emission control

FINISH

Chassis—black; bumper—white
Cab, body and wheels: choice of
any standard IH color

FRAME

Pressed steel channel main rails
6¹³/₁₆ × 2³¹/₃₂ × 0.135"
3.68 section modulus
Formed-channel front bumper

FUEL TANK

19-gallon, mounted under cab

STEERING

S-8 gear, with 17-inch steering wheel
and collapsible column

SUSPENSION

Semi-elliptic steel leaf springs
Front: 2½ × 46"; 2,310-lb capacity
Rear: 2½ × 52"; 2,210-lb capacity
Front and rear shock absorbers

TRANSMISSION

T-13 3-speed synchromesh, direct
Floor mounted gear shift lever
Ratios: 2.80, 1.85, 1.00; 4.53 rev.

WHEELS AND TIRES

Single front and rear, with spare
7.75 × 15, 4-PR tubeless tires
5-stud disc wheels, with 5.50 K rims
5½" bolt circles
Painted hub caps, front and rear

OPTIONAL EQUIPMENT

AXLE, REAR

RA-28 3,500-lb capacity single reduction
with Powr-Lok limited slip differential
Ratios: 3.31, 3.54 or 3.73

BRAKES

Vacuum power assist

CAB

Passenger side padded sun visor
Left or right side arm rest
Right side chrome mirror
Truck type outside mirrors
Glove compartment lock; tinted glass
Deluxe trim package

CAB (Continued)

Exterior trim package
Air conditioner
Front bucket seats with console

CLUTCH

11-inch 9-spring

COOLING SYSTEM

Increased capacity cooling

ELECTRICAL SYSTEM

12-volt 61-amp alternator
60 or 70 amp-hr battery
Cigar lighter;
Dual electric horns; radio

ENGINE

Hand throttle control; automatic choke

FRAME

Chrome front or rear bumper
White rear bumper

SUSPENSION

Progressive rear springs


TRANSMISSION

T-44 4-speed synchromesh, direct

WHEELS AND TIRES

8.15 × 15, 4-PR tubeless tires
Deluxe chrome hub caps, front and rear

DIMENSIONS AND WEIGHTS WITH STANDARD COMPONENTS

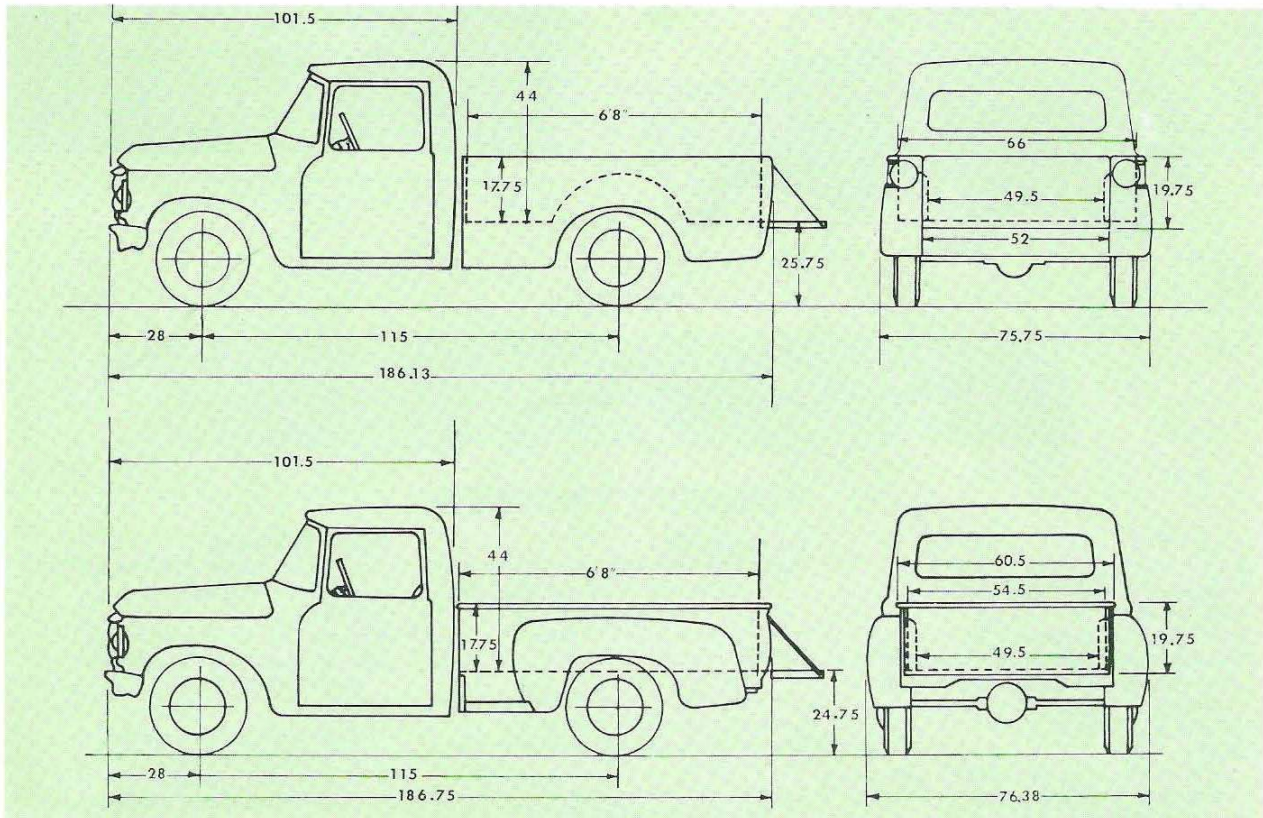

DIMENSIONS, with 7.75 × 15 TIRES

Overall Width: 78" at front fenders	Ground Clearance: 7.0" at front axle	Frame Height at Rear Axle: 24.5" empty
Overall Height: 68.6" at top of cab	7.1" at rear axle	21.3" loaded

CHASSIS DIMENSIONS and WEIGHTS

CHASSIS WEIGHTS, LBS. [®]				DIMENSIONS				TURNING RADIUS	
WB	Front	Rear	Total	CA	CF	AF	OAL	To Centerline of Tire	With Bumper Clearance
115"	2,105	1,350	3,455	42.0"	81.3"	39.3"	182.8"	19 ft. 4 in.	20 ft. 9 in.

[®]With cab, standard equipment and tires, oil, fuel and water.

TIRE DIMENSIONS

TUBELESS TIRES ON DISC WHEELS		
Tire Size	7.75 × 15	8.15 × 15
Rim Size	5.50K	5.50K
Outside Width OW	69.0"	69.5"
Tread Width TW	61.4"	61.4"
Inside Width IW	53.9"	53.4"
Chain Clearance	5.1"	4.8"
Front Tread	61.4"	61.4"

In order that product improvements may be introduced at any time specifications are subject to change without notice.



CT-400-F. AD-4300-U7. 1-1-

INTERNATIONAL HARVESTER COMPANY • 401 NORTH MICHIGAN AVE. • CHICAGO, ILLINOIS 60611

ORDER AD SPEC. SHEETS ON AD-4130.

Litho in United States of America