Contents
A - Z

OWNER'S MANUAL

MINI COUNTRYMAN
MINI PACEMAN

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

COOPER
COOPER S
COOPER S ALL4
JOHN COOPER WORKS

Congratulations on your new MINI

This Owner's Manual should be considered a permanent part of this vehicle. It should stay with the vehicle when sold to provide the next owner with important operating, safety and maintenance information.

We wish you an enjoyable driving experience.

MINI RECOMMENDS Castrol

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

© 2012 Bayerische Motoren Werke
Aktiengesellschaft
Munich, Germany
Reprinting, including excerpts, only with the
written consent of BMW AG, Munich.
US English X/12, 11 12 500
Printed on environmentally friendly paper,
bleached without chlorine, suitable for recycling.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CONTENTS

The fastest way to find information on a particular topic or item is by using the index, refer to page 260.

4 Notes
7 Reporting safety defects

AT A GLANCE 9
10 Cockpit
16 Onboard computer
20 Letters and numbers
21 Voice activation system

CONTROLS 25
26 Opening and closing
38 Adjustments
46 Transporting children safely
50 Driving
60 Controls overview
71 Technology for driving comfort and safety
84 Lamps
88 Climate
93 Practical interior accessories

DRIVING TIPS 103
104 Things to remember when driving

NAVIGATION 117
118 Navigation system
120 Destination entry
129 Route guidance
137 What to do if…

ENTERTAINMENT 139
140 On/off and tone
143 Radio
151 CD player
153 External devices

COMMUNICATIONS 163
164 Hands-free device Bluetooth
174 Mobile phone preparation Bluetooth
187 Office
195 MINI Connected

MOBILITY 199
200 Refueling
203 Wheels and tires
214 Engine compartment
218 Maintenance
220 Care
224 Replacing components
236 Giving and receiving assistance

REFERENCE 243
244 Technical data
252 Short commands for the voice activation system
260 Everything from A to Z

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

NOTES

USING THIS OWNER'S MANUAL

We have tried to make all the information in this Owner's Manual easy to find. The fastest way to find specific topics is to refer to the detailed index at the back of the manual. If you wish to gain an initial overview of your vehicle, you will find this in the first chapter.

Should you wish to sell your MINI at some time in the future, remember to hand over this Owner's Manual to the new owner; it is an important part of the vehicle.

Additional sources of information

Should you have any other questions, your MINI dealer will be glad to advise you at any time.

You can find more information about the MINI, for example on its technology, on the Internet at www.MINI.com.

SYMBOLS USED

Indicates precautions that must be followed precisely in order to avoid the possibility of personal injury and serious damage to the vehicle.◀

Indicates information that will assist you in gaining the optimum benefit from your vehicle and enable you to care more effectively for your vehicle.◀

Refers to measures that can be taken to help protect the environment.◀

◀ Marks the end of a specific item of information.

"..." Identifies Control Display texts used to select individual functions.

›...‹ Verbal instructions to use with the voice activation system.

››...‹‹ Identifies the answers generated by the voice activation system.

Symbols on vehicle components

Indicates that you should consult the relevant section of this Owner's Manual for information on a particular part or assembly.

VEHICLE EQUIPMENT

The manufacturer of your MINI is the Bayerische Motoren Werke Aktiengesellschaft, BMW AG.

This Owner's Manual describes all models as well as all production, country and special equipment that is offered in the model range. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems. For equipment and models that are not described in this Owner's Manual, please see the supplementary Owner's Manuals that are provided.

STATUS OF THIS OWNER'S MANUAL AT TIME OF PRINTING

The high level of safety and quality of the MINI vehicles is ensured through continuous development. In rare cases, there may be differences between the description and the vehicle.

FOR YOUR SAFETY

Maintenance and repair

Advanced technology, e.g. the use of modern materials and high-performance electronics, requires specially adapted mainte-

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

nance and repair methods. Therefore, have the necessary work on your MINI only carried out by a MINI dealer or a workshop that has specially trained personnel working in accordance with the specifications of the MINI manufacturer. If this work is not carried out properly, there is a danger of subsequent damage and related safety hazards.◀

Parts and accessories

For your own safety, use genuine parts and accessories approved by the manufacturer of the MINI.

When you purchase accessories tested and approved by the manufacturer of the MINI and Original MINI Parts, you simultaneously acquire the assurance that they have been thoroughly tested by the manufacturer of the MINI to ensure optimum performance when installed on your vehicle.

The manufacturer of the MINI warrants these parts to be free from defects in material and workmanship.

The manufacturer of the MINI will not accept any liability for damage resulting from installation of parts and accessories not approved by the manufacturer of the MINI.

The manufacturer of the MINI cannot test every product made by other manufacturers to verify if it can be used on a MINI safely and without risk to either the vehicle, its operation, or its occupants.

Original MINI Parts, MINI Accessories and other products approved by the manufacturer of the MINI, together with professional advice on using these items, are available from all MINI dealers.

Installation and operation of accessories that have not been approved by the manufacturer of your MINI, such as alarms, radios, amplifiers, radar detectors, wheels, suspension components, brake dust shields, telephones, including operation of any mobile phone from within the vehicle without using an externally mounted antenna, or transceiver equipment, for instance, CBs, walkie-talkies, ham radios or similar accessories, may cause extensive damage to the vehicle, compromise its safety, interfere with the vehicle's electrical system or affect the validity of the MINI Limited Warranty. See your MINI dealer for additional information.◀

Maintenance, replacement, or repair of the emission control devices and systems may be performed by any automotive repair establishment or individual using any certified automotive part.◀

California Proposition 65 Warning

California law requires us to issue the following warning:

Engine exhaust and a wide variety of automobile components and parts, including components found in the interior furnishings in a vehicle, contain or emit chemicals known to the State of California to cause cancer and birth defects and reproductive harm. In addition, certain fluids contained in vehicles and certain products of component wear contain or emit chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Battery posts, terminals and related accessories contain lead and lead compounds. Wash your hands after handling.

Used engine oil contains chemicals that have caused cancer in laboratory animals. Always protect your skin by washing thoroughly with soap and water.◀

SERVICE AND WARRANTY

We recommend that you read this publication thoroughly.

Your MINI is covered by the following warranties:

- New Vehicle Limited Warranty
- Rust Perforation Limited Warranty
- Federal Emissions System Defect Warranty

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

- Federal Emissions Performance Warranty
- California Emission Control System Limited Warranty

Detailed information about these warranties is listed in the Service and Warranty Information Booklet for US models or in the Warranty and Service Guide Booklet for Canadian models.

Your vehicle has been specifically adapted and designed to meet the particular operating conditions and homologation requirements in your country and continental region in order to deliver the full driving pleasure while the vehicle is operated under those conditions. If you wish to operate your vehicle in another country or region, you may be required to adapt your vehicle to meet different prevailing operating conditions and registration requirements. You should also be aware of any applicable warranty limitations or exclusions for such country or region. In such a case, please contact Customer Relations for further information.

Maintenance

Maintain the vehicle regularly to sustain road safety, operational reliability and the New Vehicle Limited Warranty.

Specifications for required maintenance measures:

- MINI Maintenance System
- Service and Warranty Information Booklet for US models
- Warranty and Service Guide Booklet for Canadian models

If the vehicle is not maintained according to these specifications, this could result in serious damage to the vehicle. Such damage is not covered by the MINI New Vehicle Limited Warranty.

DATA MEMORY

A variety of electronic components in your vehicle include data storage devices, which store technical information on the condition of your vehicle, events and errors, either temporarily or permanently. In general, this technical information documents the condition of a component, a module, a system or the surroundings:

- Operating conditions of system components, e.g., fill levels.
- Status messages regarding the vehicle and of its individual components, such as wheel rpm/vehicle speed, response delay, lateral acceleration.
- Malfunctions and defects in the major system components, such as the lights and brakes.
- Responses of the vehicle in special driving situations, such as the deployment of an airbag, the utilization of stability control systems.
- Environmental conditions, such as temperature.

These data are exclusively of a technical nature and are used for the detection and correction of errors, as well as the optimization of vehicle functions. Motion profiles of traveled routes can not be deduced from these data. If services are required, such as repair services, service processes, warranty claims and quality assurance, then this technical information can be read out by employees of service departments, including the manufacturer, from the event and error data storage devices by using special diagnostic equipment. There, if necessary, you will receive further information. After remedying an error, the information in the error memory is deleted or progressively overwritten.

When using the vehicle, situations are conceivable in which this technical data, in conjunction with other information, such as accident reports, vehicle damage, witness statements, etc. - possibly with the assistance of an expert - could be traced to particular individuals. Additional functions that are agreed upon contractually with the customer, such as vehicle tracking in case of emergency, permit the transmission of certain vehicle data from the vehicle.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

EVENT DATA RECORDER EDR

This vehicle is equipped with an event data recorder EDR. The main purpose of an EDR is to record, in certain crash or crash-like situations such as an air bag deployment or collision with a road obstacle, data that will assist in understanding how a vehicle's systems performed. The EDR is designed to record data related to vehicle dynamics and safety systems for a short period of time, typically 30 seconds or less.

The EDR in this vehicle is designed to record data such as:

- How various systems in your vehicle were operating.
- Whether or not the driver and passenger safety belts were fastened.
- How far, if at all, the driver was depressing the accelerator and/or brake pedal.
- How fast the vehicle was traveling.

These data can help provide a better understanding of the circumstances in which crashes and injuries occur.

EDR data are recorded by your vehicle only if a nontrivial crash situation occurs; no data are recorded by the EDR under normal driving conditions and no personal data, e.g., name, gender, age, and crash location, are recorded.

However, other parties, such as law enforcement, could combine the EDR data with the type of personally identifying data routinely acquired during a crash investigation.

Reading the data recorded by an EDR requires special equipment and access to the vehicle or the EDR. In addition to the vehicle manufacturer, other parties that have the special equipment such as law enforcement, can read the information if they have access to the vehicle or the EDR.

REPORTING SAFETY DEFECTS

For US customers

The following applies only to vehicles owned and operated in the US.

If you believe that your vehicle has a defect that could cause a crash or could cause injury or death, you should immediately inform the National Highway Traffic Safety Administration, NHTSA, in addition to notifying MINI of North America, LLC, P.O. Box 1227, Westwood, New Jersey 07675-1227, Telephone 1-800-831-1117.

If NHTSA receives similar complaints, it may open an investigation, and if it finds that a safety defect exists in a group of vehicles, it may order a recall and remedy campaign. However, NHTSA cannot become involved in individual problems between you, your dealer, or MINI of North America, LLC.

To contact NHTSA, you may call the Vehicle Safety Hotline toll-free at 1-888-327-4236 (TTY: 1-800-424-9153); go to http://www.safercar.gov; or write to: Administrator, NHTSA, 400 Seventh Street, SW., Washington, DC 20590. You can also obtain other information about motor vehicle safety from http://www.safercar.gov

For Canadian customers

Canadian customers who wish to report a safety-related defect to Transport Canada, Defect Investigations and Recalls, may telephone the toll-free hotline 1-800-333-0510. You can also obtain other information about motor vehicle safety from http://www.tc.gc.ca/roadsafety.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

WATCH ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

COCKPIT

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

AROUND THE STEERING WHEEL

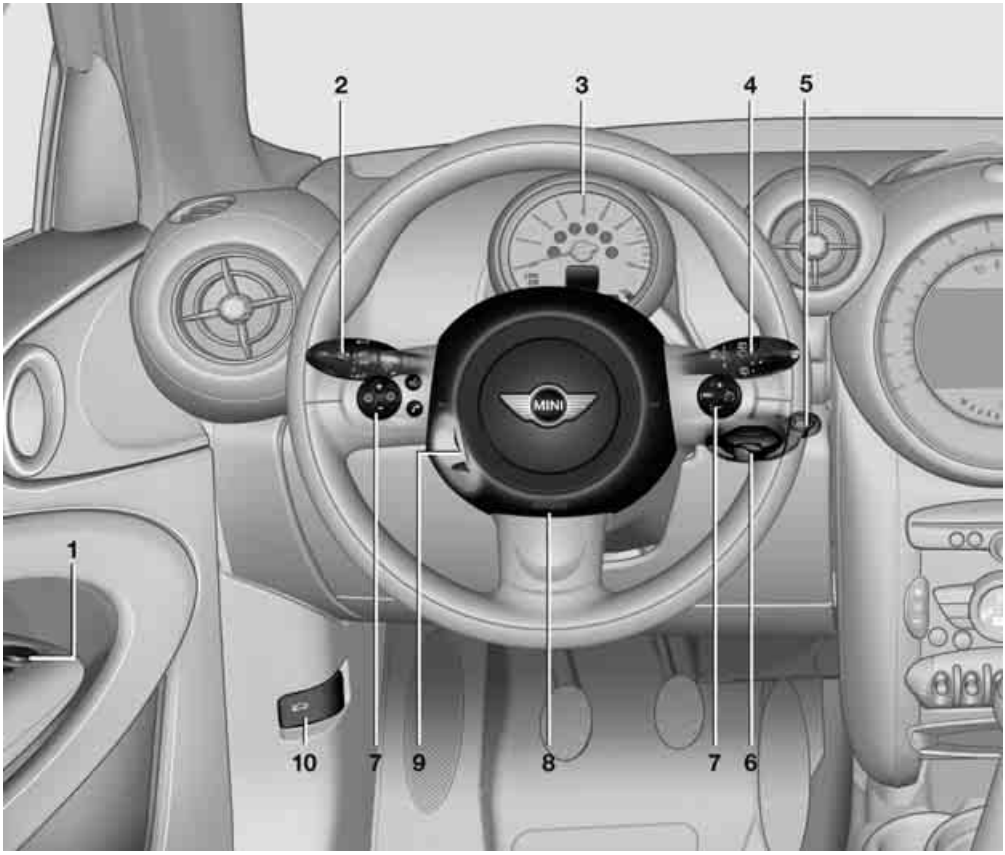

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

1 Adjusting the exterior mirrors in and out 44

Power windows, front 36

MINI Countryman: power windows, rear 36

MINI Countryman: safety switch for power windows in rear passenger compartment 37

2

Parking lamps 84

Low beams 84

Automatic headlamp control 84
Adaptive Light Control 85

Turn signals 55

High beams 86
Headlamp flasher 55

Roadside parking lamps 86

BC Computer 61

3 Tachometer 12

Instrument lighting 86

TRIP 0.0 Resetting the trip odometer 60

4

Wiper system 55

5 START ENGINE STOP Switching the ignition on/off and starting/stopping the engine 50

6 Ignition lock 50

7 Buttons on steering wheel, right

RES Resuming cruise control 58

Storing speed and accelerating or decelerating

Activating/deactivating cruise control 58

left side

Increasing or reducing volume

Telephone

Press: accepting and ending a call, starting dialing of selected phone number and redialing if no phone number is selected

Microphone in the roofliner on the driver's side

Activating/deactivating voice activation system 21

Microphone in the roofliner on the driver's side

Changing the radio station
Selecting a music track

Scrolling through the redial list

8 Horn: the entire surface

9 Adjusting the steering wheel 45

10 Releasing the hood 215

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

DISPLAYS

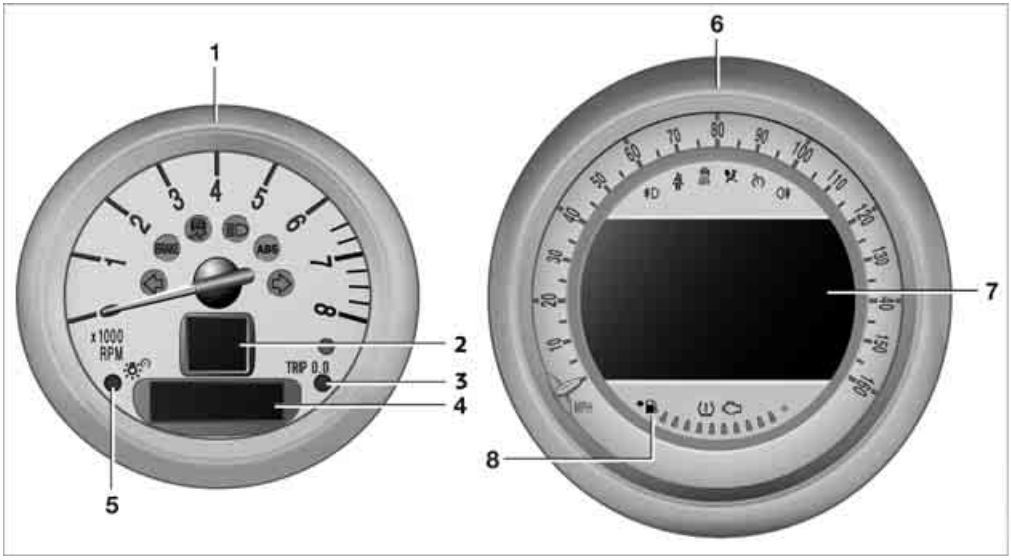

1 Tachometer 60
with indicator and warning lamps 13

2 Display for
- Current vehicle speed 60
- Indicator and warning lamps 13

3 Resetting the trip odometer 60

4 Display for
- Position of automatic transmission 52
- Computer 61
- Date of next scheduled service, and remaining distance to be driven 64
- Odometer and trip odometer 60
- Settings and information 62
- Personal Profile settings 26

5 Instrument lighting 86

6 Speedometer
with indicator and warning lamps 13

7 Control Display 17

8 Fuel gauge 60

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

INDICATOR AND WARNING LAMPS

The concept

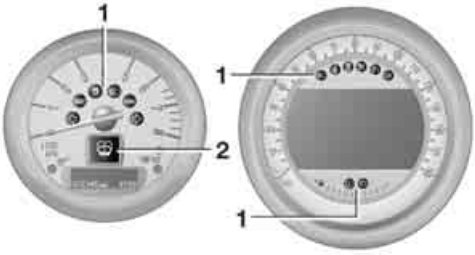

Indicator and warning lamps can light up in various combinations and colors in indicator area **1** or **2**.

Some lamps will be tested for proper functioning when the engine is started or the ignition is switched on and will therefore light up briefly.

Explanatory text messages

Text messages at the upper edge of the Control Display explain the meaning of the displayed indicator and warning lamps.

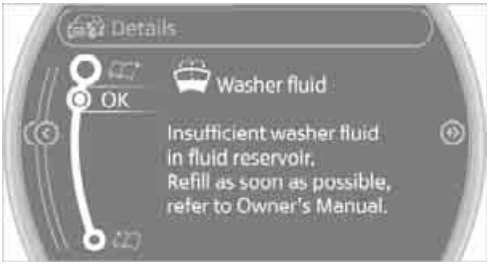

You can call up more information, e.g. on the cause of a malfunction and on how to respond, via Check Control, page 67.

In urgent cases, this information will be shown as soon as the corresponding lamp lights up.

Indicator lamps without text messages

The following indicator lamps in display area **1** indicate certain functions:

High beams/headlamp flasher 86

Front fog lamps 86

Lamp flashes:
DSC or DTC is regulating the drive forces in order to maintain driving stability 72

Parking brake applied 52

Engine malfunction with adverse effect on exhaust emissions 219

Cruise control 58

Turn signals 55

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AROUND THE CENTER CONSOLE

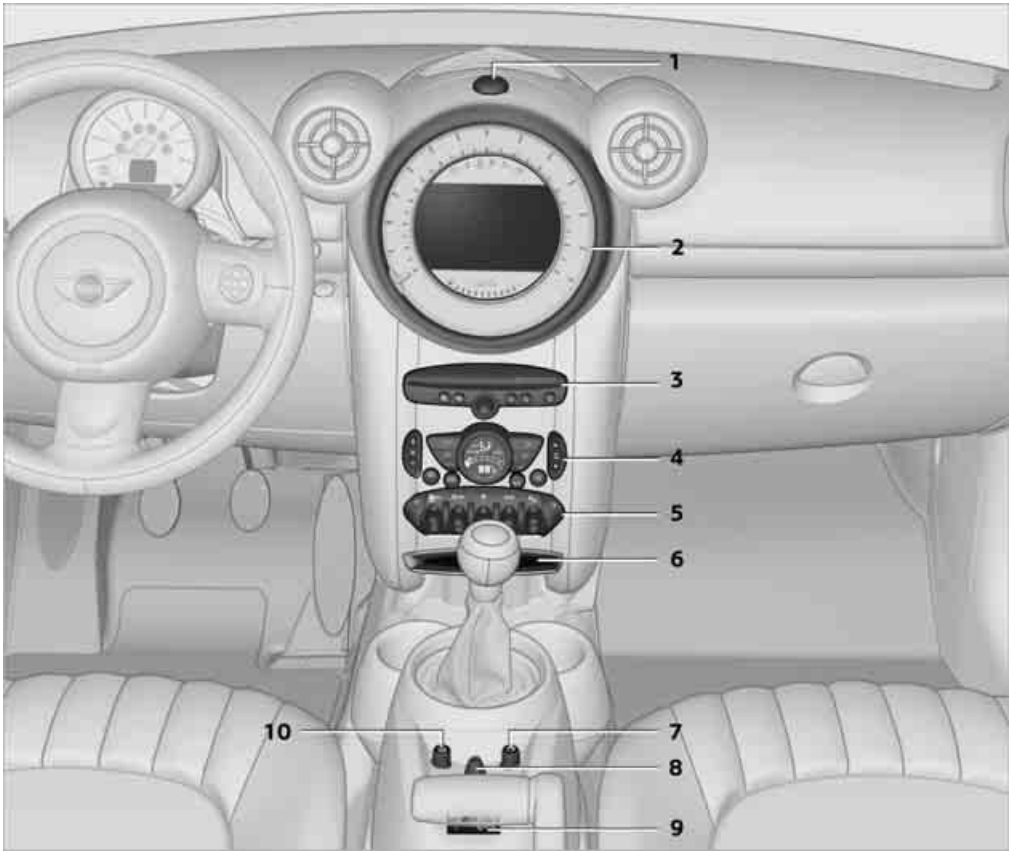

1 Hazard warning flashers

2 Speedometer 12

3 Radio/CD 143

AM FM Selecting waveband

Changing the audio source

Changing the radio station or track

Ejecting CD

4 Air conditioner or automatic climate control 88

Temperature

Recirculated-air mode

Air distribution for air conditioner

Air distribution to the windshield

Air distribution to the upper body area

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Air distribution to the footwell

AUTO Automatic air distribution and flow rate

MAX Maximum cooling

A/C Cooling function

Defrosting windows

Rear window defroster

Windshield heating

Air flow rate

5 Switches in the center console

Seat heating 42

Central locking system, inside 30

Front fog lamps 86

SPORT Sport button 74

Driving stability control systems
Dynamic Stability Control DSC 72
Dynamic Traction Control DTC 73

6 Storage compartment

7 Changing to a different menu on the Control Display 18

8 MINI joystick 16
Move in four directions, turn or press

9 USB audio interface 154

10 Accessing the main menu on the Control Display 17

AROUND THE HEADLINER

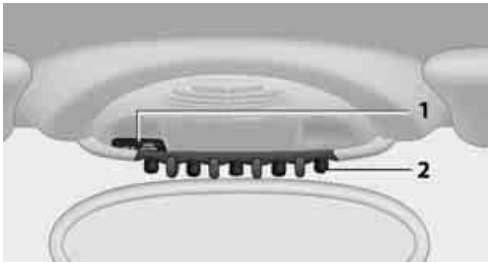

1 Indicator/warning lamp for front passenger airbags 82

2

Reading lamps 87

Ambient lighting 87

Glass roof, electric 35

Interior lamps 87

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

ONBOARD COMPUTER

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

THE CONCEPT

The onboard computer integrates the functions of a large number of switches. This allows these functions to be operated from a single central position. The following section provides an introduction to basic menu navigation. The control of the individual functions is described in connection with the relevant equipment.

Make entries only when traffic and road conditions permit; otherwise, you may endanger vehicle occupants and other road users by being distracted.◀

OVERVIEW OF OPERATING ELEMENTS

Controls

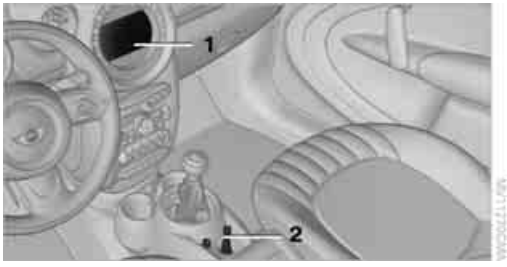

1 Control Display

2 MINI joystick with buttons

Control Display

Notes

- When cleaning the Control Display, follow the care instructions.
- Do not place any objects in the area of the Control Display; otherwise, the Control Display can be damaged.

Switching Control Display off/on

1. Move the MINI joystick to the right repeatedly until the "Options" menu is displayed.
2. "Switch off control display"

To switch on, press the MINI joystick.

MINI joystick with buttons

Selecting menu items and carrying out settings.

1. Turning **1** and pressing **2**.

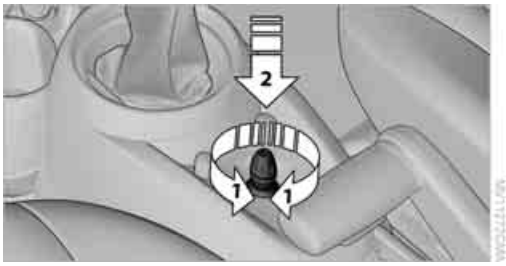

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

2. Tilting in four directions.

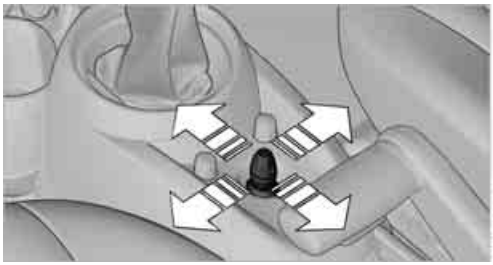

Buttons on MINI joystick

Button	Function
	Accessing the main menu
	Changing to another menu

OPERATING PRINCIPLE

As of radio readiness, the following message appears on the Control Display:

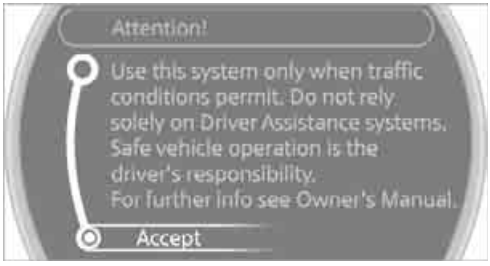

To hide the message:
Press the MINI joystick.
The main menu is displayed.

The message is automatically hidden after approx. 10 seconds.

Opening the main menu

Press the button.

All functions of the onboard computer can be accessed via the main menu.

Selecting a menu item

Menu items displayed in white can be selected.

1. Turn the MINI joystick until the desired menu item is highlighted.

2. Press the MINI joystick.

A new menu is displayed or the function is executed.

Using the button on the MINI joystick:

Press the button.

Each time that the button is pressed, the menu items of the main menu can be called up, one after another.

Menu items in the Owner's Manual

In the Owner's Manual, the menu items that should be selected are depicted in quotation marks, e.g. "Settings".

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Changing between panels

After selecting a menu item, e.g. "Radio", a new menu is displayed on a panel. The panels can overlap.

▷ Move the MINI joystick to the left.

Current panel is closed and the previous panel is displayed.

▷ Move the MINI joystick to the right.

The new panel is opened and placed on top.

Arrows pointing left or right indicate that additional panels can be accessed.

View of a menu that has been called up

In general, when a menu is called up, the panel that was last selected in the menu is displayed. To display the first panel of the menu:

Move the MINI joystick as often to the left as necessary until the first panel is displayed.

Opening the Options menu

Move the MINI joystick to the right repeatedly until the "Options" menu is displayed.

The following is displayed in the "Options" menu:

▷ Screen settings.

▷ Control options for the selected menu.

Adjusting settings

1. Select a field.
2. Turn the MINI joystick until the desired setting is displayed.

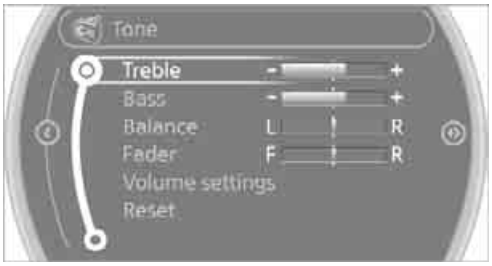

3. Press the MINI joystick to confirm the setting.

Activating/deactivating functions

Some menu items are preceded by a check box. It indicates whether the function is activated or deactivated.
Selecting the menu item activates or deactivates the function.

☑ Function is activated.

☐ Function is deactivated.

Example: setting the clock

1. Press the button.
The main menu is displayed.
2. Turn the MINI joystick until "Settings" is selected, and press the MINI joystick.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

3. Turn the MINI joystick until "Time/Date" is selected, and press the MINI joystick.

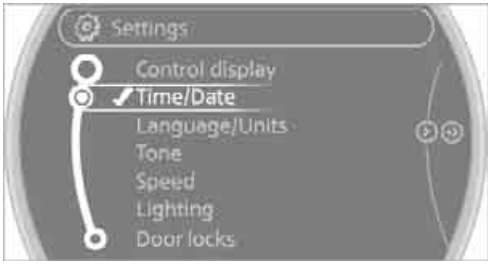

4. Turn the MINI joystick until "Time:" is selected, and press the MINI joystick.

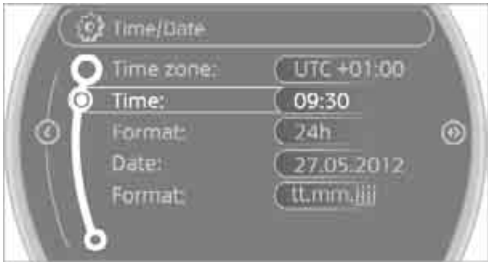

5. Turn the MINI joystick to set the hours and press the MINI joystick.
6. Turn the MINI joystick to set the minutes and press the MINI joystick.

STATUS INFORMATION

1 Time

2 Telephone status

- Incoming, outgoing or missed call
- ▲ Roaming active
- ✉ Text message received

3 Reception strength of the wireless network, depends on the mobile phone

4 Display for:

- Entertainment:
  Radio, CD, external devices
- Telephone:
  Name of the mobile phone paired with the vehicle

5 Sound output is switched off or display for traffic bulletins:

- "TI":
  Traffic bulletins are switched on.
- No display:
  Traffic bulletins are switched off.

Other displays:
Status information is temporarily hidden during Check Control message displays or entries via the voice activation system.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

LETTERS AND NUMBERS

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

ENTERING LETTERS AND NUMBERS

1. Turn the MINI joystick: select the letters or numbers.
2. Select additional letters or numbers if needed.
3. "OK": confirm entry.

Symbol	Function
⌫	Press the MINI joystick: delete one letter or number
⌫	Press and hold the MINI joystick: delete all letters or numbers
␣	Enter a blank space

Switching between letters and numbers

Depending on the menu, you can switch between entering letters and numbers:

Symbol	Function
ABC	Entering letters
1@+	Entering numbers

Switching between uppercase and lowercase letters

Depending on the menu, you can switch between entering uppercase letters and lowercase letters:

Symbol	Function
▲ abc	Move the MINI joystick forward: to switch from uppercase letters to lowercase letters
▲ ABC	Move the MINI joystick forward: to switch from lowercase letters to uppercase letters

Wordmatch concept during navigation

Entry of names and addresses: the selection is narrowed down every time a letter is entered and letters may be added automatically.

Destination search: the entries are continuously compared to the data stored in the vehicle.

- The only letters offered for entering addresses are those for which data are available.
- Town/city names can be entered with the spelling used in any of the languages available on the Control Display.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

VOICE ACTIVATION SYSTEM

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

THE CONCEPT

- By using the voice activation system, most of the functions that are displayed on the Control Display can be operated via voice commands. The system supports the entry process by means of announcements.
- Functions that can only be used while the vehicle is not moving cannot be operated via the voice activation system.
- The system includes a special microphone in the roofliner on the driver's side.

Prerequisite

So that voice commands can be identified, set a language on the Control Display that is supported by the voice activation system.

To set the language, see page 69.

Symbols in the Owner's Manual

›...‹ Say the specified commands word for word.
››...‹‹ Identifies the answers generated by the voice activation system.

SAYING COMMANDS

Activating voice activation system

1. Press the button on the steering wheel.

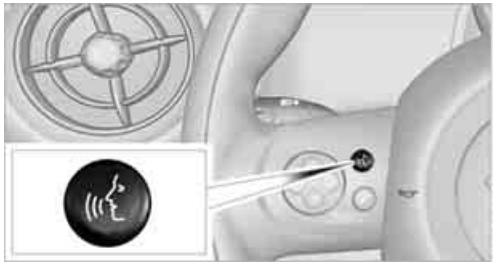

This symbol on the Control Display and an acoustic signal indicate that the voice activation system is ready to receive spoken commands.

2. Say the command.
   The command appears on the Control Display.

This symbol is displayed on the Control Display when you can enter additional commands. If no further commands are possible, continue by operating the item of equipment via the onboard computer.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Terminating or canceling voice activation system

Press the button on the steering wheel
or

›Cancel‹

Possible commands

Most menu items on the Control Display can be spoken as commands.

The commands that are possible depend upon which menu is currently shown on the Control Display.

There are short commands for many functions.

Some list items, for example telephone book listings, can also be selected using the voice activation system. In particular, say the list items exactly as they are displayed in the respective list.

Having the possible commands read aloud

Having the possible commands read aloud:

›Voice commands‹

For example if you have selected "CD" the system will read aloud the possible commands for operating the CD player.

Carrying out functions through short commands

Main menu functions can be executed immediately by short commands, almost regardless of which menu item is selected, e.g., ›Vehicle status‹.

List of voice activation system short commands, see page 252.

Help for the voice activation system

Calling up Help:

›Help‹

Additional commands for Help:

- ›Help with examples‹: information about the current operating options and the most important commands for them are announced.
- ›Help with voice activation‹: information regarding the principles behind the voice activation system is announced.

Using alternative commands

There are often a number of commands to run a function, e.g.:

›Radio‹ or ›Radio on‹

Opening the main menu

›Main menu‹

Example: playing a CD

Via the main menu

The commands of the menu items are spoken aloud; they can also be selected using the MINI joystick.

1. Switch on Entertainment sound output if necessary.
2. Press the button on the steering wheel
3. ››C D and multimedia‹‹
4. ›C D‹
5. ›C D track …‹
6. ›Track …‹ e.g. CD track 4.

Via short commands

The CD playback can also be started by a short command.

1. Switch on Entertainment sound output if necessary.
2. Press the button on the steering wheel.
3. ›C D … track …‹ e.g. CD track 4.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Setting the voice dialog

You can set whether the system uses the standard dialog or a short version.

With the short version of the spoken dialog, a shortened version of the requests and responses of the voice activation system are played aloud.

1. "Settings"
2. "Language/Units"
3. "Speech mode:"

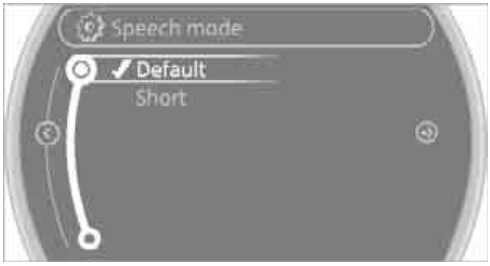

4. Select a setting:
   - ▷ "Default"
   - ▷ "Short"

NOTES

For voice commands, bear in mind the following:

- ▷ Do not use the voice activation system to initiate an emergency call. In stressful situations, the voice and vocal pitch can change. This can unnecessarily delay the establishment of a telephone connection.
- ▷ Pronounce the commands and digits smoothly and at normal volume, avoiding excessive emphases and pauses. The same applies to spelling when entering a destination for navigation.
- ▷ Always speak the commands in the language of the voice activation system.
- ▷ When selecting a radio station, use the standard pronunciation of the station name

  ›Select station‹ e.g. WPLJ
- ▷ Keep the doors, windows and glass roof closed to prevent interference from outside noise.
- ▷ Avoid ambient noise in the vehicle while speaking.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

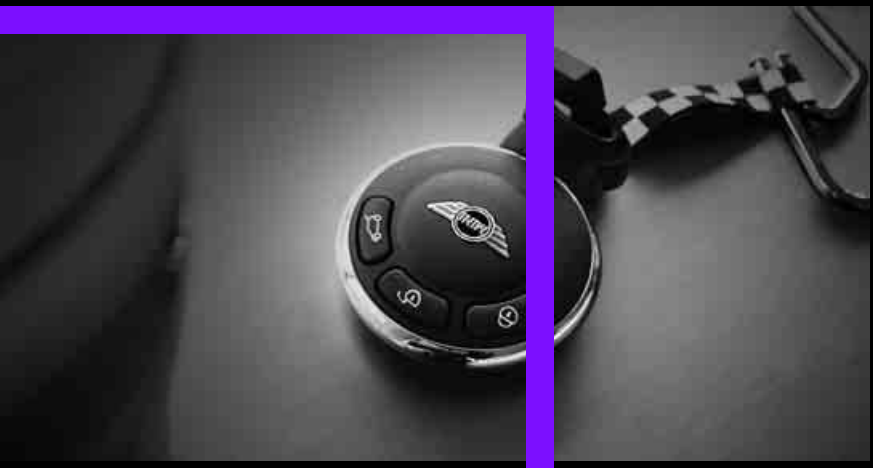

HANDLE ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

OPENING AND CLOSING

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

KEYS/REMOTE CONTROLS

Buttons on the remote control

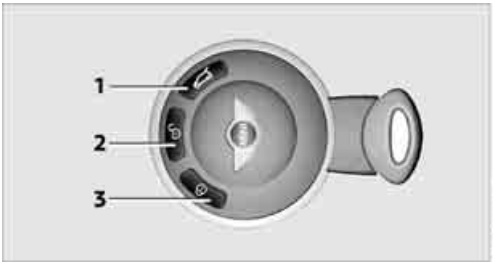

1 Opening the tailgate

2 Unlocking

3 Locking

General information

Each remote control contains a rechargeable battery that is recharged when it is in the ignition lock while the car is being driven. You should therefore use each remote control at least twice a year to maintain the charge status. In vehicles equipped with Comfort Access, the remote control contains a replaceable battery, page 35.

If more than one remote control unit is used, the settings called up and implemented depend on which remote control is recognized when the car is unlocked, refer to Personal Profile, page 26.

In addition, information about service requirements is stored in the remote control, refer to Service data in the remote control, page 218.

New remote controls

Your MINI dealer can supply new remote controls as additional units or as replacements in the event of loss.

Integrated key

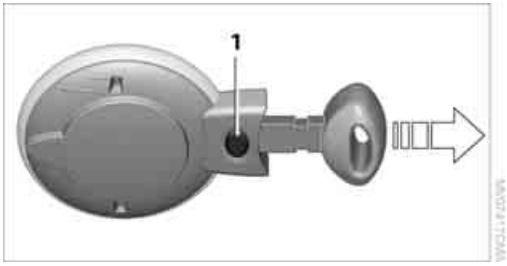

Press button **1** to release the key.

The integrated key fits the following locks:

▷ Driver's door, page 29

PERSONAL PROFILE

The concept

The functions of your MINI can be set individually. By means of Personal Profiles, most of these settings are stored for the remote control currently in use. When you unlock the car, the remote control is recognized and the settings stored for it are called up and implemented.

This means that your settings will be activated for you, even if in the meantime your car was used by someone else with another remote control and the corresponding settings.

Individual settings are stored for a maximum of three remote controls.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Personal Profile settings

For more information on specific settings, refer to the specified pages.

- Response of the central locking system when the car is being unlocked 27
- Automatic locking of the vehicle 30
- Triple turn signal activation 55
- Settings for the displays on the onboard computer, in the speedometer and in the tachometer:
  - 12 h/24 h mode of the clock 66
  - Date format 67
  - Brightness of the Control Display 70
  - Language on the Control Display 69
  - Units of measure for fuel consumption, distance covered/remaining distances and temperature 64
- Light settings:
  - Pathway lighting 85
  - Daytime running lights 85
- Automatic climate control: activating/deactivating the AUTO program, setting the temperature, air volume and air distribution 90
- Entertainment:
  - Audio volume 141
  - Tone control 141

CENTRAL LOCKING SYSTEM

The concept

The central locking system is ready for operation whenever the driver's door is closed.

The system simultaneously engages and releases the locks on the following:

- Doors
- Tailgate
- Fuel filler flap

Operating from outside

- Via the remote control
- Using the door lock
- In cars with Comfort Access, via the door handles on the driver's and passenger's sides

The anti-theft system is also operated at the same time. It prevents the doors from being unlocked using the lock buttons or door handles. The remote control can also be used to switch the welcome lamps, the interior light, and the ambient lighting on and off. The alarm system is also activated or deactivated, page 32.

Operating from inside

Switch/button for central locking system, page 30.

In the event of a sufficiently severe accident, the central locking system unlocks automatically. In addition, the hazard warning flashers and interior lamps come on.

OPENING AND CLOSING: FROM OUTSIDE

Persons or animals in a parked vehicle could lock the doors from the inside. Take the key with you when you leave the vehicle so that the vehicle can be opened from the outside.◀

Using the remote control

Unlocking

Press the button.
The welcome lamps and interior lamps come on.

Unlocking mode

You can also set which parts of the car are unlocked. The setting is stored for the remote control in use.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

1. "Settings"

2. "Door locks"
3. "Unlock button"

4. Select a menu item:
   - ▷ "All doors"
     Press the button once to unlock the entire vehicle.
   - ▷ "Driver's door only"
     Press the button once to unlock only the driver's door and the fuel filler flap.
     Press the button twice to unlock the entire vehicle.

Convenient opening

Press and hold the button.
The power windows are opened and the glass roof is tilted.

Convenient closing is not possible by means of the remote control.◀

Locking

Press the button.

Do not lock the vehicle from the outside if there is any person inside, because the vehicle cannot be unlocked from inside without special knowledge.◀

Setting confirmation signals

To have the vehicle confirm when it has been locked or unlocked.

1. "Settings"
2. "Door locks"
3. "Flash when lock/unlock"

4. Press the MINI joystick.

Flashing when locking/unlocking the vehicle is switched on.

Switching on interior lamps

While the car is locked:
Press the button.
You can also use this function to locate your vehicle in parking garages, etc.

Unlocking tailgate

Press the button for approx. 1 second and then release it.

When it is opened, the tailgate swings out and up toward the rear. Make sure that adequate clearance is available before opening. To prevent accidentally locking yourself out, do not place the key down in the cargo area. If the tailgate was locked before opening, it will be locked again after it is closed.
Before and after each trip, check that the tailgate has not been inadvertently unlocked.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Malfunctions

The remote control may malfunction due to local radio waves. If this occurs, unlock and lock the car at the door lock with the integrated key.

If the car can no longer be locked with a remote control, the battery in the remote control is discharged. Use this remote control during an extended drive; this will recharge the battery, page 26.

For US owners only

The transmitter and receiver units comply with part 15 of the FCC/Federal Communications Commission regulations. Operation is governed by the following:

FCC ID:
LX8766S
LX8766E
LX8CAS

Compliance statement:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device must not cause harmful interference, and
- this device must accept any interference received, including interference that may cause undesired operation.

Any unauthorized modifications or changes to these devices could void the user's authority to operate this equipment.◀

Using the door lock

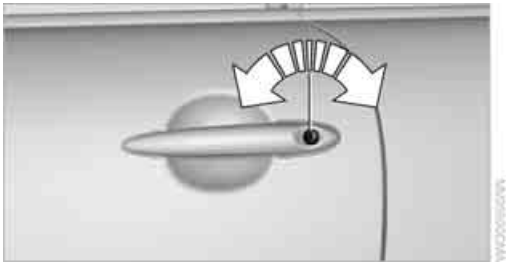

You can set which parts of the car are unlocked, page 27.

Depending upon the equipment, it is possible that only the driver's side door is unlocked or locked using the door lock.

Do not lock the vehicle from the outside if there is any person inside, because the vehicle cannot be unlocked from inside without special knowledge.◀

Locking doors and tailgate together

To lock all doors, the fuel filler flap, and the tailgate together:

- With the doors closed, press the interior central locking button, page 30, to lock the vehicle.
- Unlocking and opening the driver or passenger door, page 30.

Lock the vehicle.

- Lock the driver's door with the integrated key via the door lock, or
- press the safety lock button on the passenger's door and close the door from the outside.

Convenience operation

With an alarm system or Comfort Access, the windows and glass roof can be operated via the door lock.

Opening/closing

Hold the key in the position for unlocking or locking.

Watch during the closing process to make sure that no one gets trapped. Releasing the key stops the operation.◀

Manual operation

In the event of an electrical malfunction, the driver's door can be unlocked or locked by turning the integrated key in the door lock to the end positions.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

OPENING AND CLOSING: FROM INSIDE

Operation via

- Switch in the center console

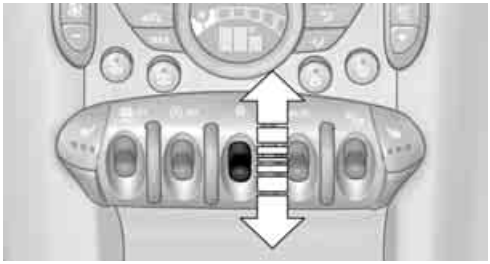

- Button in the driver's door or front passenger door:

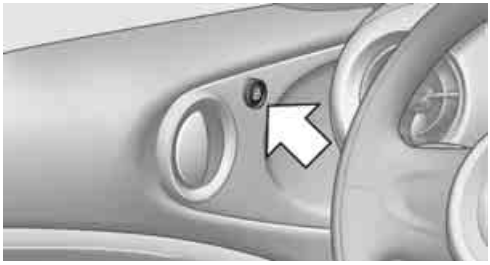

The illustration shows the button in the MINI Paceman as an example.

The switch or the button locks or unlocks the doors and tailgate when the doors are closed, but the anti-theft system is not activated. The fuel filler flap remains unlocked.

Unlocking and opening

- Either unlock the doors together using the switch or the buttons for the central locking system and then pull the door handle above the armrest or
- pull on the door handle of either door twice: the first time unlocks the door, the second time opens it.

Locking

- Press the switch/button or
- press down the safety lock button of a door. To prevent you from being locked out, the open driver's door cannot be locked using the lock button.

Persons or animals in a parked vehicle could lock the doors from the inside. Take the key with you when you leave the vehicle so that the vehicle can be opened from the outside.◀

Automatic locking

You can also set the situations in which the car locks. The setting is stored for the remote control in use.

1. "Settings"
2. "Door locks"
3. Select a menu item:
   - "Lock if no door is opened"
     The central locking system automatically locks the vehicle after a short time if no door has been opened.
   - "Lock after start. to drive"
     The central locking system locks the vehicle as soon as you begin to drive.

The setting is stored for the remote control currently in use.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Unlocking tailgate

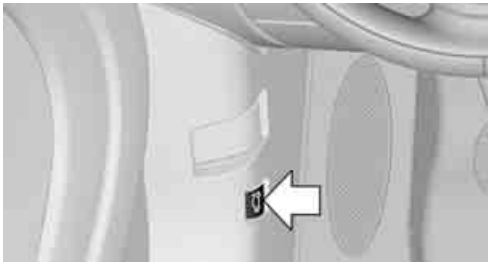

Press the button in the driver's footwell.

TAILGATE

To avoid damage, make sure there is sufficient clearance before opening the tailgate.◀

While driving, sharp objects or objects with edges may strike against the rear window and damage the heating element for the rear window. Assure that there are no objects with sharp edges near the rear window.◀

Opening

In some market-specific versions, the tailgate cannot be unlocked using the remote control unless the vehicle is unlocked first.
Only drive with the tailgate fully closed; otherwise, the tail lamps will be obscured and driving safety will be compromised.◀

MINI Countryman:

MINI Paceman:

Press the top side of the MINI emblem, arrow, or

Press the button on the remote control for approx. 1 second and then release it. The tailgate is unlocked.

Closing

Make sure that the closing path of the tailgate is clear; otherwise, injuries may occur.◀

Take the remote control with you and do not put it into the luggage compartment: otherwise, the remote control can be locked in the vehicle when the tailgate is closed.◀

MINI Countryman:

MINI Paceman:

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

The handle recesses on the interior trim panel of the tailgate make it easier to pull it down.

ALARM SYSTEM

The concept

The alarm system, when activated, reacts if:

- A door, the engine compartment lid or the tailgate is opened
- There is movement inside the car
- The car's inclination changes, for instance if an attempt is made to jack it up and steal the wheels or to raise it prior to towing it away
- There is an interruption in the power supply from the battery

The alarm system briefly indicates unauthorized entry or tampering by means of:

- An acoustic alarm
- Switching on the hazard warning flashers

Arming and disarming

General information

Whenever the car is locked or unlocked, the alarm system is armed or disarmed.

Door lock with armed alarm system

Because of the design, unlocking the door lock may trigger the alarm in some countries.

To turn off the alarm, unlock the vehicle using the remote control or switch on the ignition.

Tailgate with armed alarm system

Even when the alarm system is armed, you can open the tailgate by means of the button on the remote control.
When you subsequently close the tailgate it is again locked and monitored.

Panic mode

You can activate the alarm system if you find yourself in a dangerous situation.

Press the button for at least 2 seconds.

Switching off the alarm:
Press any button.

Switching off an alarm

- Unlock the car with the remote control.
- Insert the key fully into the ignition lock.
- In cars with Comfort Access, press the button on the door lock.

Display on the revolution counter

When the system is armed, all LEDs pulse. After approx. 16 minutes one LED flashes.

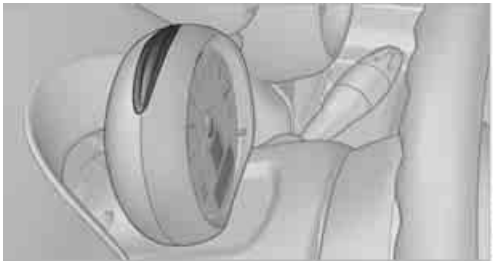

- LEDs pulse or LED flashes: system is armed.
- One LED flashes at short intervals:
  Doors, the hood or the tailgate are not properly closed. Even if these are not closed fully, the remaining items are deadlocked and the LEDs pulse after approx. 10 seconds for approx. 16 minutes. Afterwards, one LED flashes.
  The interior movement detector is not activated.
- LEDs go out after the vehicle is unlocked:
  No attempt was made to tamper with the car.
- LEDs flash after unlocking until the key is inserted in the ignition, but for no longer than approx. 5 minutes: an attempt was made to tamper with the vehicle.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Tilt alarm sensor

The vehicle's inclination is monitored. The alarm is triggered, for instance, if an attempt is made to steal the vehicle's wheels or tow it away.

Interior movement detector

Before the interior movement detector can operate correctly, the windows and glass roof must be closed.

Avoiding false alarms

The tilt alarm sensor and the interior movement detector can be switched off together.

This prevents false alarms, e.g. in the following situations:

- In duplex garages
- When being transported on car-carrying trains, ferries or trailers
- If pets are to remain inside the car

Switching off the tilt alarm sensor and interior movement detector

Press the button on the remote control twice in succession.

LEDs flash in short succession for approx. 2 seconds.
The tilt alarm sensor and the interior movement detector are switched off until the car is next unlocked and locked.

COMFORT ACCESS

The concept

Access to the vehicle is possible without the use of the remote control. All you need to do is wear the remote control close to your body, e.g. in your jacket pocket. The vehicle automatically detects the remote control within the immediate vicinity or in the passenger compartment.

Comfort Access supports the following functions:

- Unlocking/locking the vehicle
- Convenient closing
- Unlocking the tailgate separately
- Starting the engine

Functional requirements

- There are no external malfunction sources in the vicinity.
- For locking, the remote control must be outside of the vehicle.
- The vehicle cannot be locked or unlocked again until after approx. 2 seconds.
- The engine can only be started if the remote control is in the vehicle.
- The doors and tailgate must be closed to be able to operate the windows and glass roof.

Comparison to standard remote controls

The indicated function can be operated by pressing the buttons or via Comfort Access.

Instructions on opening and closing are found starting on page 26.

If you notice a brief delay while opening or closing the windows or glass roof, the system is checking whether a remote control is inside the vehicle. Repeat the opening or closing procedure, if necessary.◀

Unlocking

Press button **1**.
Depending on the setting, refer to Unlocking mode on page 27, only the driver's door or the entire vehicle is unlocked.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Press the button again to lock the vehicle again.◀

Convenient opening with the remote control, refer to page 28.

Locking

Press button **1**.

For Convenient closing, press and hold button **1**.

In addition, the windows and the glass sunroof are closed.

Unlocking the tailgate separately

Press the top side of the MINI emblem.

If the vehicle detects that a remote control has been accidentally left inside the locked vehicle's cargo area after the tailgate is closed, the tailgate will reopen slightly. The hazard warning flashers flash and an acoustic signal sounds.◀

Windows and glass roof, electric

If the engine is switched off, you can still operate the windows and glass sunroof so long as a door or the tailgate has not been opened.

If the doors and tailgate are closed again and the remote control is located inside the vehicle, the windows and the glass sunroof can be operated again.

Insert the remote control into the ignition lock to be able to operate the windows or glass roof when the engine is switched off and the doors are open.

Switching on radio readiness

Switch on radio readiness by pressing the Start/Stop button, page 50.

Do not depress the brake or the clutch; otherwise, the engine will start.◀

Starting the engine

The engine can be started or the ignition can be switched on when a remote control is inside the vehicle. It is not necessary to insert a remote control into the ignition lock, page 50.

Switching off the engine in cars with automatic transmission

The engine can only be switched off when the selector lever is in position P, page 52.
To switch the engine off when the selector lever is in position N, the remote control must be in the ignition lock.

Before driving a vehicle with automatic transmission into a car wash

1. Insert remote control into ignition lock.
2. Depress the brake.
3. Move the selector lever to position N.
4. Switch off the engine.

The vehicle can roll.

Malfunction

Comfort Access may malfunction due to local radio waves.

If this happens, open or close the vehicle via the buttons on the remote control or using the integrated key.
Insert the remote control into the ignition lock and start the engine.

Warning lamps

The warning lamp lights up when an attempt is made to start the engine: the engine cannot be started. The remote control is not inside the vehicle or is malfunctioning. Take the remote control with you inside the vehicle or have it checked. If necessary, insert another remote control into the ignition lock.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

The warning lamp lights up when the engine is running: the remote control is no longer inside the vehicle. After the engine is switched off, the engine can only be restarted within approx. 10 seconds.

The indicator lamp lights up and a message appears on the Control Display: replace the battery in the remote control.

Replacing the battery

The remote control for Comfort Access contains a battery that will need to be replaced from time to time.

1. Remove the cover.

2. Insert the new battery with the plus side facing up.
3. Press the cover on to close.

Take the old battery to a recycling center or to your MINI dealer.◀

GLASS ROOF, ELECTRIC

To prevent injuries, exercise care when closing the glass roof and keep it in your field of vision until it is shut.
Take the key with you when you leave the car; otherwise, children could operate the roof and possibly injure themselves.◀

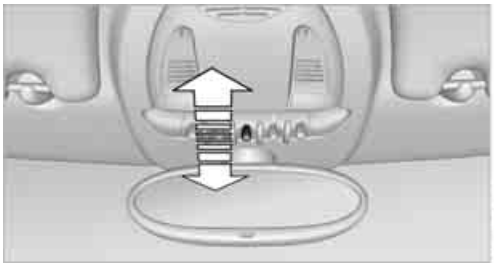

Tilting

▷ Press the switch backward to the resistance point and hold it there.
Both glass roofs are tilted.
Releasing the switch stops the movement.

▷ With the ignition switched on, press the switch backward beyond the resistance point.
Both closed roofs are tilted fully.
Pressing again stops the movement.

Opening, closing

With the ignition switched on and the glass sunroof tilted, press the switch backward and hold it there.
The front glass roof opens.
The rear glass roof is closed.
Releasing the switch stops the movement.

The glass roof can be closed in the same way by pressing the switch forward.

The front glass roof remains in a tilted position. The rear glass roof is tilted. Pressing on the switch again closes both roofs completely.

Convenience operation via door lock or Comfort Access, refer to page 28 and 34.

Roller sunblind

The roller sunblind can be opened and closed independently of the glass roof.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Following interruptions in electrical power supply

After a power failure, there is a possibility that the glass roof can only be tilted. In this case, have the system initialized. The manufacturer of your MINI recommends that you have this work done by your MINI dealer.

WINDOWS

General information

To prevent injuries, exercise care when closing the window and keep it in your field of vision until it is shut.
Take the remote control with you when you leave the car; otherwise, children could operate the electric windows and possibly injure themselves.◀

If, after a window is opened and closed several times in close succession, the window can only be closed and not opened, the system is overheated. Let the system cool for several minutes with the ignition switched on or the engine running.◀

Opening, closing

Front window

To open:

- Press the switch to the resistance point.
  The window continues to open as long as the switch is held.
- Press the switch beyond the resistance point.
  The window opens automatically in radio readiness mode or higher.

  Push the switch again to stop the opening movement.

To close:

- Pull the switch to the resistance point.
  The window continues to close as long as the switch is held.
- Pull the switch beyond the resistance point.
  The window closes automatically.

Pushing the switch again stops the operation.

MINI Countryman: rear window

To open:

- Press the switch to the resistance point.
  The window continues to open as long as the switch is held.
- Press the switch beyond the resistance point.
  The window opens automatically in radio readiness mode or higher.

To close:

- Pull the switch to the resistance point.
  The window continues to close as long as the switch is held.
- Pull the switch beyond the resistance point.
  The window closes automatically.

Pushing the switch again stops the operation.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

After switching off the ignition

When the ignition is switched off, the windows can still be operated for approx. 1 minute as long as no door is opened.

Take the key with you when you leave the car; otherwise, children could operate the electric windows and possibly injure themselves.◀

Pinch protection system

If the closing force rises beyond a predefined threshold during closing, the system will stop moving the window prior to lowering it again slightly.

Even though there is the pinch protection system, always make sure that the window's travel path is clear; otherwise, the safety system might fail to detect certain kinds of obstructions, such as thin objects, and the window would continue closing.

Do not install any accessories that might interfere with window movement. Otherwise, the pinch protection system could be impaired.◀

Closing without pinch protection

To prevent injuries, exercise care when closing the window and make sure that the closing area is unobstructed.◀

If there is an external danger, or if ice on the windows, etc., prevents you from closing the windows normally, the window can be closed manually.

1. Pull the switch past the resistance point and hold it there.
   Pinch protection is limited and the window reopens slightly if the closing force exceeds a certain value.
2. Pull the switch again past the resistance point within approx. 4 seconds and hold it there.

   The window closes without pinch protection.

MINI Countryman: safety switch

With the safety switch, you can prevent the rear windows from being opened or closed via the switches in the rear passenger area, by children, for example.

Press the button.
The LED lights up when this safety feature is activated.

Always press the safety switch when children ride in the rear, otherwise uncontrolled closing of the windows could lead to injuries.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

ADJUSTMENTS

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

SITTING SAFELY

The ideal sitting position can make a vital contribution to relaxed, fatigue-free driving. In conjunction with the safety belts, the head restraints and the airbags, the seated position has a major influence on your safety in the event of an accident. To ensure that the safety systems operate with optimal efficiency, we strongly urge you to observe the instructions contained in the following section.

For additional information on transporting children safely, refer to page 46.

Airbags

Always maintain an adequate distance between yourself and the airbags. Always grip the steering wheel on the rim, with your hands in the 3 o'clock and 9 o'clock positions, to minimize the risk of injury to the hands or arms in the event of the airbag being deployed.
No one and nothing should come between the airbags and the seat occupant.
Do not use the cover of the front airbag on the front passenger side as a storage area. Ensure that the front passenger is correctly seated, e.g. that no feet or legs are propped against the dashboard. Otherwise, leg injury could result if the front airbag suddenly deployed.
Make sure that passengers keep their heads away from the side airbag and do not lean against the cover of the head airbag; otherwise injuries can occur when the airbags are deployed.◀

Even if you follow all the instructions, injuries resulting from contact with airbags cannot be fully excluded, depending on the circumstances. The ignition and inflation noise may provoke a mild hearing loss in extremely sensitive individuals. This effect is usually only temporary.

For airbag locations and additional information on airbags, refer to page 81.

Head restraint

A correctly adjusted head restraint reduces the risk of neck injury in the event of an accident.

Adjust the head restraint in such a way that its center is at approx. ear level. Otherwise, there is an increased risk of injury in the event of an accident.◀

Head restraints, refer to page 41.

Safety belt

Before every drive, make sure that all occupants wear their safety belts. Airbags complement the safety belt as an additional safety device, but they do not represent a substitute.

Number of safety belts

Never allow more than one person to wear a single safety belt. Never allow infants or small children to ride in a passenger's lap.
Make sure that the belt in the lap area sits low across the hips and does not press against the abdomen. The safety belt must not rest against the throat, run across sharp edges, pass over hard or fragile objects or be pinched. Fasten the safety belt so that it is pulled taut across the lap and shoulder, fitting the body snugly without any twists. Otherwise, the belt could slide over the hips in the event of a frontal collision and injure the abdomen. Avoid wearing bulky clothing and regularly pull the belt in the upper-body area taut; otherwise, its restraining effect could be impaired.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Safety belts, refer to page 42.

SEATS

Note before adjusting

Never attempt to adjust your seat while the vehicle is moving. The seat could respond with unexpected movement, and the ensuing loss of vehicle control could lead to an accident.

On the front passenger seat as well, do not incline the backrest too far to the rear while the vehicle is being driven; otherwise, there is a danger in the event of an accident of sliding under the safety belt, eliminating the protection normally provided by the belt.◀

Comply with the instructions on head restraint height on page 41 and on damaged safety belts on page 44.

Seat adjustment, front

Observe the instructions on page 39 to ensure the best possible personal protection.◀

Longitudinal direction

Pull the lever, arrow **1**, and slide the seat into the desired position, arrows **2**.

After releasing the lever, move the seat slightly forward or back so that it engages properly.

Height

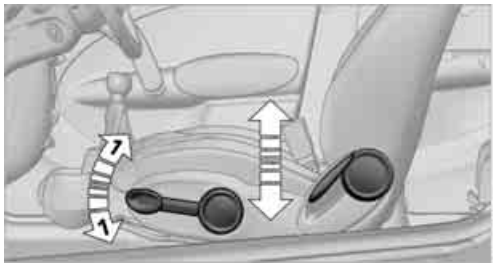

Pull up or push down the lever repeatedly, arrows **1**, until the desired height is reached.

Backrest

MINI Countryman:

Pull lever, arrow **1**, and apply weight to or remove weight from the backrest as needed.

MINI Paceman:

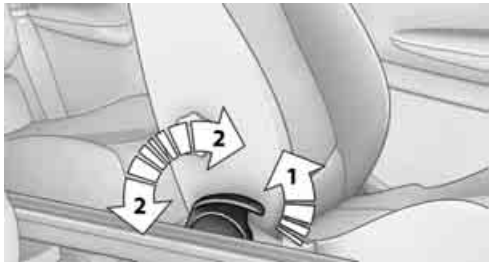

Pull the lever, arrow **1**, and apply your weight to the backrest or lift it off as necessary, arrows **2**.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Lumbar support

You can also adjust the contour of the backrest to obtain additional support in the lumbar region.

The upper hips and spinal column receive supplementary support to help you maintain a relaxed, upright sitting position.

The illustration shows the MINI Countryman as an example.

Turn the wheel to increase or decrease the curvature.

MINI Paceman: getting in back

1. Pull up the lever on the seat backrest, arrow **1**.

   The backrest folds forward.
2. Move the seat forward by pushing on the backrest, arrow **2**.

After getting in or out, revert to the original seat position, refer to the following section.

To facilitate entry into the rear seat, you might slide the safety belt backwards in the lower belt slide rail.

Return seat to original position

The driver's seat has a mechanical memory function for the forward/back setting and the backrest adjustment.

1. Slide the seat to return to its starting position.

   Do not fold the backrest up until the seat is in its previous position. Otherwise, the seat will engage in its current position. In this case, adjust the longitudinal position manually, page 39.◀
2. Fold the backrest back up to lock the seat.

When moving the seat backward, make sure that you do not cause personal injury or property damage.
Before driving off, engage the front seats and seat backrests. Otherwise, there is a risk of accident due to unexpected movement.◀

MINI Countryman: seat adjustment, rear

Do not adjust rear seats while the vehicle is moving; otherwise, passengers could be injured.
Make sure that the locking devices of the rear seats engage properly. Otherwise the restraining effect of the safety belts during an accident could be reduced.◀

Longitudinal adjustment

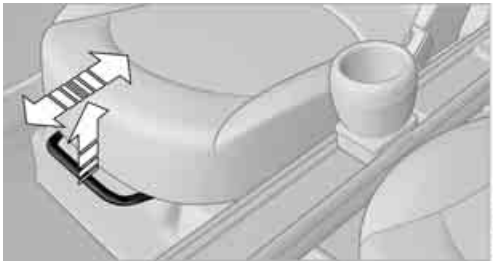

1. Pull the lever and slide the seat into the desired position.
2. Release the lever and move the seat slightly forward or back so that it engages properly.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Backrest

Adjusting backrest angle, refer to page 106.

HEAD RESTRAINTS

Correctly adjusted head restraint

A correctly adjusted head restraint reduces the risk of neck injury in the event of an accident.

Correctly adjust the head restraints of all occupied seats; otherwise, there is an increased risk of injury in an accident.◀

Height

Adjust the head restraint so that its center is approximately at ear level.

Height adjustment

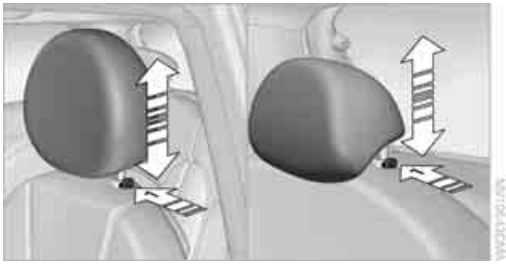

To raise: pull up.

To lower: press the button, arrow **1**, and slide the head restraint down.

Removing

Only remove a head restraint if no one will be sitting on the seat in question.

Reinstall the head restraint before transporting passengers, as otherwise the head restraint cannot provide its protective function.◀

Front

1. Pull up as far as it will go.
2. Fold the backrest back slightly.
3. Press button **1** and pull the head restraint out as far as it will go.
4. MINI Countryman: press the additional button **2** with a suitable tool.
5. Pull out the head restraint.
6. Fold back the backrest.

Rear

1. Pull up as far as it will go.
2. Fold the backrest forward slightly.
3. Press button **1** and pull the head restraint out as far as it will go.
4. Press the additional button **2** with a suitable tool.
5. Pull the head restraint all the way out.
6. Fold rear seat backrest back into position.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

SEAT HEATING

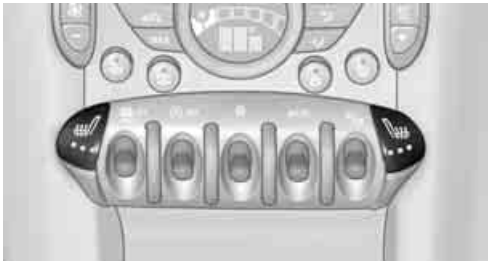

Switching on

Press once for each temperature level.
Three LEDs indicate the highest temperature.

If you continue driving within the next 15 minutes, the seat heating is automatically activated at the previously set temperature.

The temperature is lowered or the heating is switched off entirely to reduce the drain on the battery.
The LEDs stay lit.

Switching off

Press button longer.

SAFETY BELTS

Observe the instructions on page 39 to ensure the best possible personal protection.◀

Before every drive, make sure that all occupants wear their safety belts. Airbags complement the safety belt as an additional safety device, but they do not represent a substitute.

Front and rear seats

MINI Countryman:

MINI Paceman:

Closing

Make sure you hear the lock engage in the belt buckle.

The upper belt anchor is suitable for adults of any stature as long as the seat is adjusted properly, page 39.

Opening

1. Grasp the belt firmly.
2. Press the red button in the buckle.
3. Guide the belt into its reel.

MINI Countryman: height adjustment for rear safety belt tongues

When the outer rear seats are unoccupied, the safety belt tongues can be slid back to the cargo area trim panel with a clasp to prevent noise.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Countryman: rear seat center belt

The belt buckle marked with the word CENTER is designed exclusively for the middle passenger.

If the center safety belt is used in the back, the backrests must be locked, see page 107; otherwise the safety belt will not have a restraining effect.

Belt take-up on headliner

The take-up for the safety belt is on the headliner.

1 Opening for safety belt

2 Receptacle for small belt latch

Remove small belt latch from the take-up. Guide both belt latches downwards.

Fastening

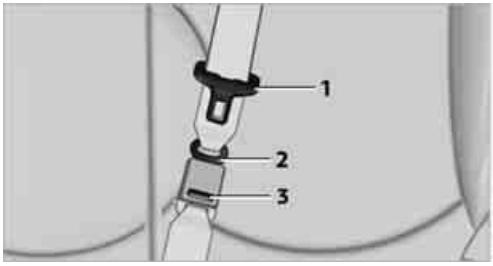

Insert safety belt with small belt latch **2** into the small belt buckle **3**.

Opening

Press red button on small belt buckle **3** with belt latch **1**.

If the center belt is locked:

Press red button **3** with the belt latch of the left outside belt.

Buckle belt

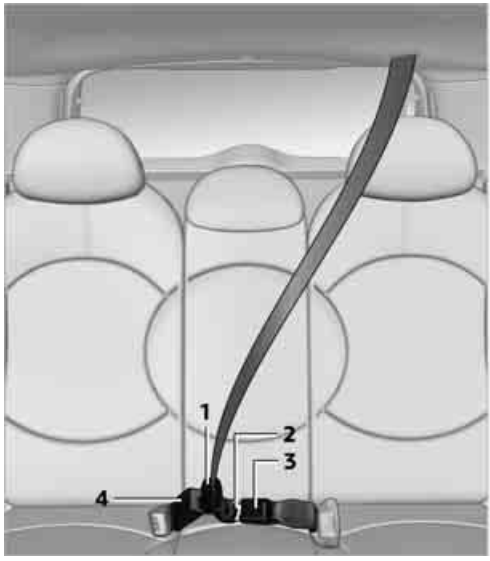

1 Large belt latch

2 Small belt latch

3 Small belt buckle

4 Large belt buckle

The belt latch **1** must be inserted into the belt buckle **4**. Make sure you hear the lock engage in the belt buckle.

Insert the belt latch into the belt buckle so that the safety belt is properly attached when a person is buckled in, and is not twisted.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Stow away the center belt

If the center seat is not occupied, then insert the belt buckles **3** and **4** into the corresponding holders, arrows.

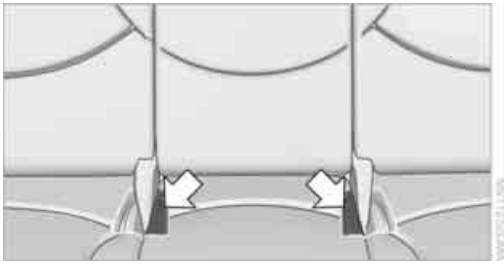

Guide belt latches to the belt take-ups on the headliner, refer to page 43, and insert them in the provided take-ups.

Safety Belt Reminder

Front seats

The indicator lamps come on and an acoustic signal sounds. A message also appears on the Control Display. Check whether the safety belt has been fastened correctly. The Safety Belt Reminder is issued when the driver's safety belt has not been fastened. The Safety Belt Reminder is also activated at road speeds above approx. 5 mph or 8 km/h if the front passenger's safety belt has not been fastened, if objects are placed on the front passenger seat, or if driver or front passenger unfasten their safety belts.

Damage to safety belts

If the safety belts are damaged or stressed in an accident: have the safety belt system and its seat-belt tensioners replaced and the belt anchors checked. Have this work carried out only by a MINI dealer or by a workshop that has specially trained personnel working in accordance with the specifications of the MINI manufacturer; otherwise, correct operation of these safety systems is not ensured.◀

MIRRORS

Exterior mirrors

The mirror on the passenger's side is more curved than the driver's mirror. The objects seen in the mirror are closer than they appear. Do not gauge your distance from traffic behind you on the basis of what you see in the mirror; otherwise, there is an increased risk of an accident.◀

Adjusting electrically

1 Adjustments

2 Select left/right mirror

3 Tilting mirrors in and out

Selecting the mirror:

Switching to the other mirror: slide the mirror switch.

To adjust:

The same as the button movement.

Folding mirrors in and out:

Press button **3**.
The mirrors can be folded in at road speeds up to approx. 20 mph/30 km/h.

This can be beneficial in narrow streets, for example, or for moving mirrors that were folded in by hand back out into their correct positions.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Manual adjustment

If there is, for example, an electrical failure, press on the edges of the mirror glass.

Automatic heating

At external temperatures below a certain limit, both exterior mirrors are automatically heated while the engine is running or the ignition switched on.

Interior rearview mirror

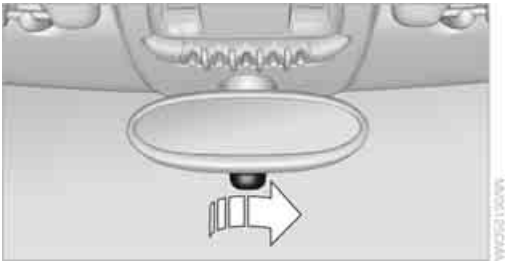

To reduce glare from vehicles behind you when you are driving at night:

Turn the knob.

Interior and exterior mirrors, automatic dimming feature

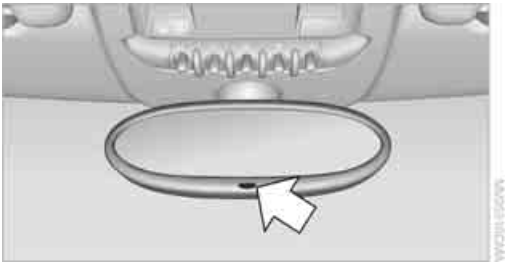

It is controlled by two photosensors:

- Inside the interior rearview mirror, arrow.
- On the back of the mirror.

For proper function:

- Keep the photosensors clean.
- Do not cover the area between the interior rearview mirror and the windshield.
- Do not place stickers or decals on the windshield in front of the mirror.

STEERING WHEEL

Adjustments

Do not adjust the steering wheel position while the car is in motion; otherwise, there is a risk of accident due to an unexpected movement.◀

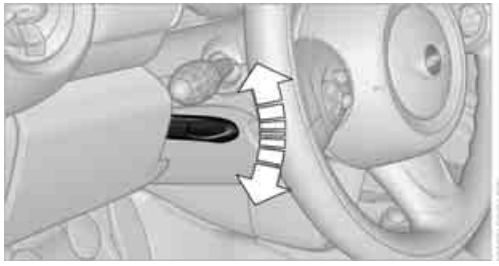

1. Fold the lever down.
2. Move the steering wheel to the preferred distance and angle to suit your seated position.
3. Swing the lever back up.

   Do not use force to swing the lever back up; otherwise, the mechanism will be damaged.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

TRANSPORTING CHILDREN SAFELY

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

THE RIGHT PLACE FOR CHILDREN

Do not leave children unattended in the vehicle; otherwise, they could endanger themselves and/or other persons by opening the doors, for example.◀

Children should always sit in the rear

Accident research has shown that the safest place for children is on the rear seat.

Only transport children under the age of 13 or smaller than 5 ft/150 cm in the rear in a child restraint system suitable for their age, weight and size. Otherwise, there is an increased risk of injury in the event of an accident.◀

Children 13 years of age or older must be buckled in with a safety belt as soon as there no longer is any child restraint system that is appropriate for their age, size and weight.

Exception for front passenger seat

Front passenger airbags

Should it be necessary to use a child restraint system on the front passenger seat, the front and side airbags must be deactivated. Otherwise, there is an increased risk of injury to the child if the airbags deploy, even if the child is seated in a child restraint system.◀

For more information on automatic deactivation of the front passenger airbags, refer to page 82.

CHILD RESTRAINT SYSTEMS, INSTALLATION

Before installing a child restraint system on the rear seats, move the seat as far back as possible.

5-seater: adjust the inclination of the center backrest to the respective outer backrest.

After the child restraint system has been installed on the respective rear seat, move the backrest forward so that the it rests lightly against the child restraint system, refer to Rear seat backrests on page 107.

Observe the child restraint system manufacturer's instructions when selecting, installing and using child restraint systems. Otherwise, the protective effect may be diminished.◀

On the front passenger seat

After installing a child restraint system on the front passenger seat, make sure that the front, side, and knee airbags for the front passenger are deactivated; otherwise, there is an increased risk of injury if the airbags deploy.◀

Seat position

Before installing a child restraint system, move the front passenger seat as far back and up as possible to obtain the best possible position for the belt. Do not change the seat position after this.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Child seat security

The illustration shows the MINI Countryman as an example.

All rear safety belts and the safety belt for the front passenger can be prevented from being pulled out in order to secure child restraint systems.

Locking the safety belt

1. Secure the child restraint system with the belt.
2. Pull the belt strap all the way out.
3. Allow the belt strap to retract and pull it taut against the child restraint system.

The safety belt is locked.

Unlocking the safety belt

1. Open the belt buckle.
2. Remove the child restraint system.
3. Allow the safety belt strap to retract all the way.

   Center belt: unlocking additional belt buckle **3**, see page 43.
   Guide safety belt to the take-up on the headliner.

LATCH CHILD RESTRAINT FIXING SYSTEM

LATCH: Lower Anchors and Tethers for Children.

To install and use the LATCH child restraint system, follow the operating and safety instructions provided by the manufacturer of the system; otherwise, the protective function of the seat may be compromised.◀

Anchor points for LATCH anchors

When the child is restrained by the internal harnesses, the lower anchors may be used to attach the CRS to the vehicle seat up to a combined child and CRS weight of 65 lb/30 kg.

Before installing the child seat, pull the belt out of the area for the child restraint fixing system.

MINI Countryman:

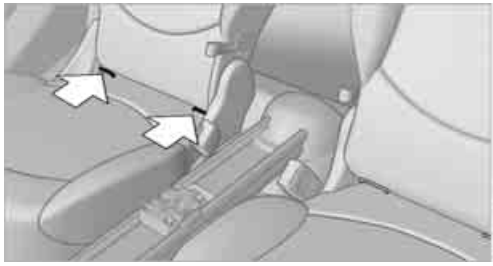

MINI Paceman:

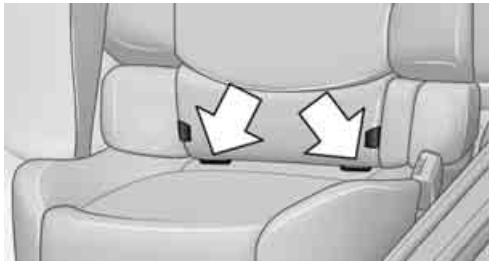

The mounts for the lower LATCH anchors are located at the points indicated by the arrows.

Make sure that both lower LATCH anchors are properly engaged and that the child restraint system rests firmly against the seat backrest; otherwise, the protective function of the seat may be compromised.◀

Child restraint system with tether strap

Use the tether strap anchors to secure child restraint systems only; otherwise, the anchors could be damaged.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Countryman

4-seater:

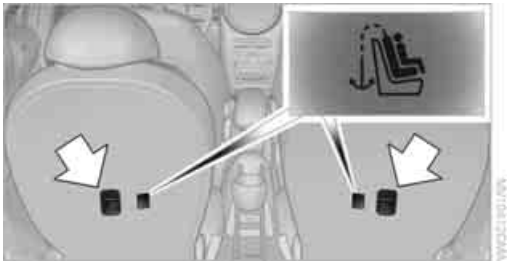

The child restraint anchor fittings, see arrows, are located behind the back of the rear seats.

5-seater:

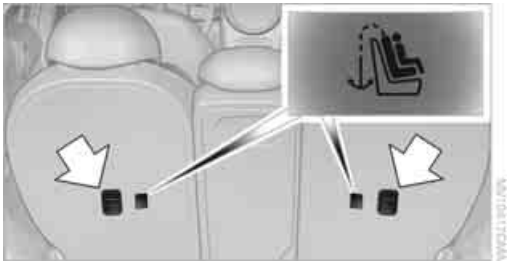

The child restraint anchor fittings for the two outer seats, see arrows, are located behind the back of the rear seats.
The child restraint anchor fitting for the center seat is located under the luggage-compartment sill, position **4** in picture center seat.

MINI Paceman

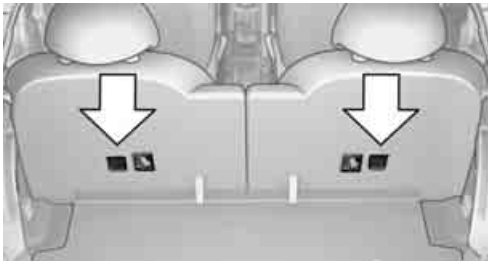

The child restraint anchor fittings, see arrows, are located behind the back of the rear seats.

Placement of the tether strap

Make sure the upper tether strap does not run over sharp edges and is not twisted as it passes to the top anchor. Otherwise, the strap will not properly secure the child restraint system in the event of an accident.◀

Outer seats:

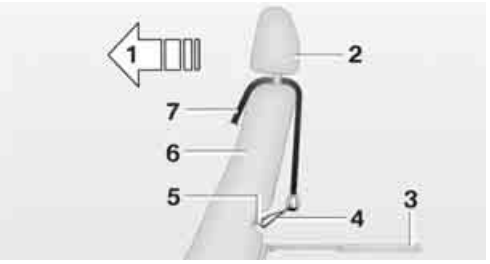

1 Direction of travel
2 Head restraint
3 Rear cargo well
4 Tether strap hook
5 Anchor
6 Seat backrest
7 Tether strap of the child restraint system

MINI Countryman, center seat:

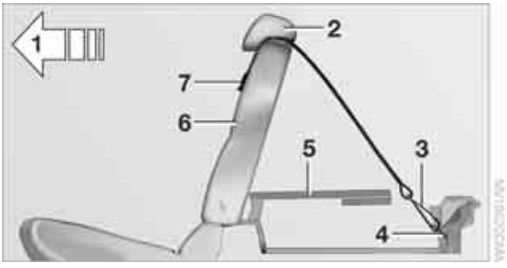

1 Forward driving direction
2 Head rest
3 Attaching clip
4 Child restraint anchor fitting
5 Load area floor
6 Seat back
7 Strap of the child restraint system

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Attaching upper tether strap to the attachment point

1. Slide the head restraint upward.
2. Center seat: fold the load area floor backwards
3. Guide the tether strap between the head restraint holders.
4. Attach the tether strap to the anchor using the hook.
5. Push the head restraint into its lowermost position.
6. Pull the tether strap tight.

MINI COUNTRYMAN: SECURING DOORS AND WINDOWS

Rear doors

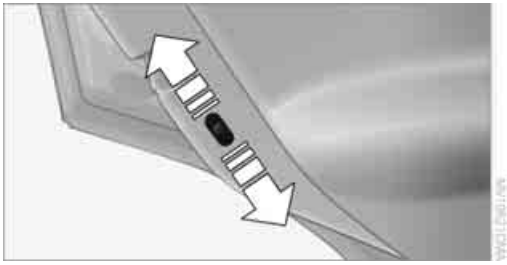

Slide down the safety lever on the rear doors.

The door can now be opened from the outside only.

Safety switch for power windows

The rear power windows are blocked and cannot be operated from the rear. Press safety switch, refer to page 37.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

DRIVING

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

IGNITION LOCK

Inserting the key into the ignition lock

Insert the key all the way into the ignition lock.

Radio readiness
Individual electrical consumers can operate.

Removing the key from the ignition lock

Press in the key briefly. It is ejected slightly.

At the same time:

- The ignition is switched off if it was on beforehand.

Automatic transmission

The key can only be removed if the selector lever is in position P: interlock.

START/STOP BUTTON

Press the Start/Stop button to switch radio readiness or the ignition on and off. Do not depress the brake or clutch while doing so.

If the Start/Stop button is pressed while the clutch is depressed in the manual transmission or the brake pedal is depressed in the automatic transmission, the engine starts.◀

Radio readiness

Individual electrical consumers can operate. The time and external temperature are displayed in the tachometer.

Radio readiness is switched off automatically:

- When the key is removed from the ignition lock
- When using Comfort Access by pressing the button on the door handle or the button on the remote control, refer to Locking on page 34
- After a certain has elapsed

Ignition on

Most indicator and warning lamps in indicator area **1**, page 13, light up for varying lengths of time.

When the engine is off, switch off the ignition and any unnecessary electrical consumers in order to preserve the battery.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Radio readiness and ignition off

All indicator and warning lamps in the displays go out.

The ignition switches off automatically if the driver's door is opened. Pressing the Start/Stop button again switches the ignition back on.

The ignition is not switched off in situations such as the following:

- The clutch or brake is depressed
- The low beams are switched on

STARTING THE ENGINE

Do not allow the engine to run in enclosed areas; otherwise, inhalation of the noxious exhaust gases can lead to loss of consciousness and death. Exhaust gases contain carbon monoxide, an odorless and colorless, but highly toxic gas. Never leave an unattended vehicle with the engine running; otherwise, such a vehicle represents a potential safety hazard.
Before leaving the car while the engine is running, place the transmission in neutral or move the selector lever to position P and forcefully apply the parking brake to prevent the car from moving.◀

Avoid frequent starting in quick succession or repeated start attempts in which the engine does not start. Otherwise, the fuel is not burned or inadequately burned and there is a danger of overheating and damaging the catalytic converter.◀

Do not let the engine warm up with the vehicle at a standstill. Move off immediately at a moderate engine speed.

When starting the engine, do not depress the accelerator pedal.

Manual transmission

Key in ignition lock or inside vehicle with Comfort Access, refer to page 33.

1. Depress the brake.
2. Depress the clutch.
3. Press the Start/Stop button.

Automatic transmission

Key in ignition lock or inside vehicle with Comfort Access, refer to page 33.

1. Depress the brake.
2. Shift the selector lever into position P or N.
3. Press the Start/Stop button.

The starter operates automatically for a certain time, and stops automatically as soon as the engine has started.

SWITCHING OFF THE ENGINE

Always take the key with you when you leave the vehicle.
When parking, apply the parking brake forcefully; otherwise, the vehicle could begin to roll. Secure the vehicle on steep upward and downward slopes, for example, turn the steering wheel towards the curb.◀

Manual transmission

1. With the car at a standstill, press the Start/Stop button.
2. Shift into first gear or reverse.
3. Forcefully apply the parking brake.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Automatic transmission

1. With the car at a stop, move the selector lever to position P.
2. Press the Start/Stop button.
3. Forcefully apply the parking brake.

Before driving into a car wash

By following these steps, the vehicle is able to roll:

1. Place the remote control, even with Comfort Access, in the ignition lock.
2. Depress the brake.
3. Move the selector lever to position N.
4. Switch off the engine.

PARKING BRAKE

The parking brake is primarily intended to prevent the vehicle from rolling while parked; it brakes the rear wheels.

In addition, follow the instructions on page 51 under Switching off the engine.

Applying

The lever locks in position automatically.

Releasing

Pull upward slightly, press the button, arrow, and guide the lever down.

In exceptional cases, if the parking brake has to be used to slow or stop the car, do not pull the lever up too hard. In doing so, continuously press the button of the parking brake lever.
Otherwise, excessive force could lead to overbraking and loss of traction, i.e. fishtailing, at the rear axle.◀

MANUAL TRANSMISSION

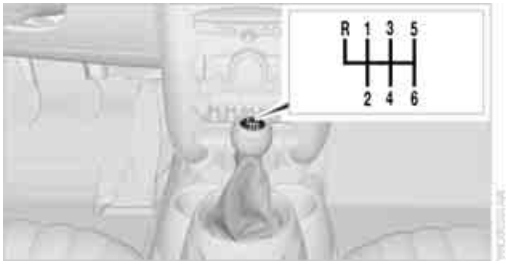

When shifting into 5th or 6th gear, press the gearshift lever to the right. Otherwise, the engine could be damaged if you inadvertently shift into 3rd or 4th gear.◀

Reverse gear

Select this only when the vehicle is stationary. When the gearshift lever is pressed to the left, a slight resistance has to be overcome.

AUTOMATIC TRANSMISSION WITH STEPTRONIC

In addition to the fully automatic mode, you can shift gears manually using Steptronic, page 54.

Parking the vehicle

To prevent the vehicle from rolling, always select position P and apply the parking brake before leaving the vehicle with the engine running.◀

Removing the key

To remove the key from the ignition lock, first move the selector lever into position P and then switch off the engine: interlock. Remove the key from the ignition lock, refer to page 50.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Selector lever positions

P R N D M/S + –

Displays in the tachometer

P R N D DS M1 to M6

The selector lever position is displayed, or the current gear in the manual mode.

Changing selector lever positions

- The selector lever can only be moved out of position P when the ignition is switched on or the engine is running.
- Before moving the lever away from P or N with the vehicle stationary, first depress the brake; otherwise, the selector lever will refuse to move: shiftlock.

  To prevent the vehicle from creeping after you select a driving position, depress the brake until you are ready to start.◀

A lock prevents accidental shifting into selector lever positions R and P.

Overriding the selector lever lock

Press the button on the front of the selector lever, arrow.

P Park

Select this only when the vehicle is stationary. The front wheels are blocked.

R Reverse

Select this only when the vehicle is stationary.

N Neutral

Select this when you are in a car wash, for example. The vehicle can roll.

D Drive, automatic position

Position for normal vehicle operation. All forward gears are selected automatically.

Under normal operating conditions, the fuel consumption is lowest when driving in position D.

Kickdown

Kickdown enables you to achieve maximum performance.
Depress the accelerator pedal beyond the full-throttle resistance point.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Sport program and manual mode M/S

Move the selector lever from position D to the left into the M/S shifting slot:
The Sport program is activated and DS is displayed. This position is recommended for a performance-oriented driving style.

To deactivate the Sport program or manual mode M/S, move the selector lever to the right into position D.

Shifting with the selector lever

Push the selector lever forward or pull it back to activate manual operation. Steptronic shifts the gear.

- ▷ Pull the selector lever in the + direction. Transmission shifts up.
- ▷ Push the selector lever in the – direction. Transmission shifts down.

The selected gear is displayed in the tachometer, e.g. M1.

To use the automatic mode again, move the selector lever to the right into position D.

Upshifts and downshifts are executed only when they will result in a plausible combination of engine and vehicle speed; thus, for example, a downshift that would cause the engine to overrev will not be executed by the system. The selected gear is displayed briefly, followed by the current gear.

Shifting on the steering wheel

With the selector lever in position D, automatic drive, you can shift gears using the shift paddles on the steering wheel. The transmission automatically switches to manual mode.

If you do not shift gears with the shift paddles or accelerate for a certain amount of time, the transmission automatically returns to D, automatic drive.

- ▷ Pull one of the shift paddles. Transmission shifts up.
- ▷ Push one of the shift paddles. Transmission shifts down.

M1 through M6 are displayed in the tachometer.

Manually releasing the selector lever lock

Should the selector lever refuse to move out of position P even though the ignition is switched on, the brake is depressed and the button on the selector lever is pressed, the selector lever lock can be overridden:

1. Unclip the sleeve of the selector lever.
2. Pull the sleeve up over the selector lever until the sleeve is inside out. Disconnect the cable connector if necessary.

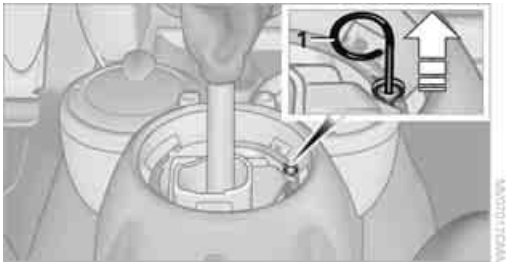

3. Insert extractor hook **1** into the loop on the passenger's side.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

The extractor hook is in the onboard document holder or in the pouch for the tire-changing set, page 232.◀

4. Pull the loop up.
5. Move the selector lever into the desired position by pressing the button on the front of the selector lever.

Before manually unlocking the selector lever lock, firmly set the parking brake to prevent the vehicle from rolling away.◀

TURN SIGNALS/ HEADLAMP FLASHER

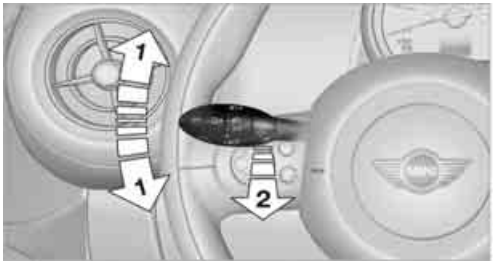

1 Turn signals

2 Headlamp flasher

Using turn signals

Press the lever beyond the resistance point.

To turn off manually, press the lever to the resistance point.

Unusually rapid flashing of the indicator lamp indicates that an indicator bulb has failed.◀

Signaling a turn briefly

Press the lever as far as the resistance point for as long as you wish to signal a turn.

Triple turn signal activation

Press the lever as far as the resistance point.

You can set whether the turn signal flashes once or three times.

1. "Settings"
2. "Lighting"
3. "Triple turn signal"

The setting is stored for the remote control currently in use.

WIPER SYSTEM

Do not turn on the wipers when they are frozen; otherwise, the wiper blades and the windshield wiper motor may be damaged.◀

Do not use the windshield wipers when the windshield is dry; otherwise the wiper blades may wear out faster or be damaged.◀

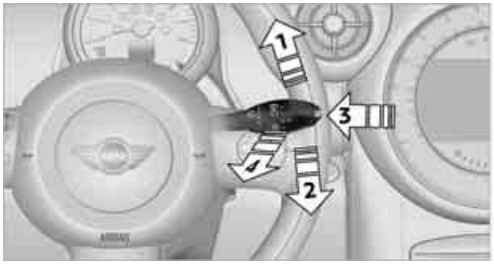

1 Switching on wipers

2 Switching off wipers or brief wipe

3 Activating/deactivating intermittent wipe or rain sensor

4 Cleaning windshield and headlamps

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Switching on wipers

Press the lever upward, arrow **1**.

The lever automatically returns to its initial position when released.

Normal wiper speed

Press once.
The system switches to intermittent operation when the vehicle is stationary.

Fast wiper speed

Press twice or press beyond the resistance point. The system switches to normal speed when the vehicle is stationary.

Intermittent wipe or rain sensor

If the car is not equipped with a rain sensor, the intermittent-wipe time is preset.

If the car is equipped with a rain sensor, the time between wipes is controlled automatically and depends on the intensity of the rainfall. The rain sensor is mounted on the windshield, directly in front of the interior rearview mirror.

Activating intermittent wipe or rain sensor

Press button, arrow **3**.

This symbol is displayed in the tachometer.

Deactivate the rain sensor before entering an automatic car wash. Failure to do so could result in damage caused by undesired wiper activation.◀

Adjusting the sensitivity of the rain sensor

1. Switch on the ignition, refer to page 50.
2. Press the button in the turn signal indicator as often as necessary until "SET/INFO" is displayed.

3. Press and hold the button until the display changes.
4. Press the button as often as necessary until the symbol and "SET" are displayed.

5. Press and hold the button until the display changes.

6. Press the button to select the desired sensitivity.
7. Wait, or press and hold the button until the display changes.
The settings are stored.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Deactivating intermittent wipe or rain sensor

Press the button again, arrow **3**.

Brief wipe

Press the lever downward once, arrow **2**.

Cleaning windshield and headlamps

Pull the lever, arrow **4**.

Washer fluid is sprayed onto the windshield and the wipers are operated briefly.

When the vehicle lighting system is switched on, the headlamps are cleaned at regular and appropriate intervals.

In cars equipped with an alarm system, the headlamps cannot be cleaned when the hood is open.

Do not use the washers when the washer fluid reservoir is empty; otherwise, you will damage the washer pump.
Only use the washers if the hood has been completely closed; otherwise, the headlamp washer system may be damaged. Do not use the washers if there is any danger that the fluid will freeze on the windshield. If you do, your vision could be obscured. For this reason, use antifreeze.◀

Window washer nozzles

The window washer nozzles are heated automatically while the engine is running or the ignition is switched on.

Rear window wiper

0 Rear wipers parked

1 To switch on intermittent wipe :
Turn the cap to level **1**.
Operation is continuous in reverse gear.

The rear wiper does not move if the cap is in interval stage **1** before the ignition is switched on.

Cleaning the rear window

2 To clean the rear window during intermittent wipe :
Turn the cap further to level **2** and hold it there.

3 To clean the rear window when wipers are parked :
Turn the cap to level **3** and hold it there.

Do not use the washers when the washer fluid reservoir is empty; otherwise, you will damage the washer pump.◀

WASHER FLUID

General information

Washer fluid is flammable. Keep it away from ignition sources, only store it in the closed, original container, and keep out of reach of children; otherwise, there is a danger of injury. Comply with the instructions on the container.◀

United States: the washer fluid mixture ratio is regulated by the U.S. EPA and many individual states; do not exceed the applicable limits on allowable washer fluid dilution ratios. Follow the usage instructions on the washer fluid container. Use MINI Windshield Washer Concentrate or the equivalent.

Washer fluid reservoir

Only refill washer fluid that contains antifreeze when the engine is cool, to avoid contact with hot engine parts. Otherwise, fluid spills constitute a fire hazard and a risk to personal safety.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Fill with a mixture of washer fluid concentrate and water and, if required, with a washer antifreeze according to manufacturer's recommendations.

Do not fill with undiluted washer fluid concentrate and do not use water alone; these can damage the washer system.

Mix the water and antifreeze before filling the washer fluid reservoir to make sure the correct concentration is maintained.◀

Capacity

Approx. 4.2 US quarts/4 liters.

CRUISE CONTROL

The concept

Cruise control is available at vehicle speeds of at least approx. 20 mph or 30 km/h. The car then stores and maintains the speed that you specify using the button on the steering wheel.

Do not use cruise control when driving at constant speed is prevented by adverse conditions, e.g. winding roads, dense traffic or poor road conditions due to, e.g. snow, rain, ice or loose surfaces. Otherwise, you could lose control of the vehicle and cause an accident as a result.◀

Activating

1 Maintaining, storing and increasing speed

2 Activating/deactivating cruise control

3 Maintaining, storing and decreasing speed

4 Resuming cruise control

Activating/deactivating cruise control

Press button **2**.

Interruption

The system is automatically deactivated if:

- Braking takes place
- The clutch is engaged
- The transmission is set on N
- The stability control system is on

Cruise control is not deactivated by depressing the accelerator pedal. Once the accelerator pedal is released, the stored speed is achieved again and maintained.

The stored speed is cleared when the ignition is switched off.

Maintaining current speed

Press button **1**.

The system maintains and stores the current vehicle speed.

If, on a downhill grade, the engine braking effect is not sufficient, the controlled speed may be exceeded. On uphill grades vehicle speed may drop if the engine output is insufficient.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Increasing speed

Press button **1** repeatedly until the desired speed is reached. Every time you press the button, the speed increases by approx. 1 mph or 1 km/h.

Accelerating using the button

Press and hold button **1**.

The vehicle accelerates without pressure on the accelerator pedal. After the button is released, the driving speed is maintained and stored.

Decreasing speed

Press button **3** repeatedly until the desired speed is reached.

The functions here are the same as for increasing the speed or accelerating, except that the speed will be decreased.

Resuming a speed stored beforehand

Press button **4**.

The last speed stored is achieved again and maintained.

The stored speed is cleared when the ignition is switched off.

Displays

Selected speed is displayed briefly.

If --- mph or --- km/h is displayed briefly in the tachometer, the conditions necessary for operation may not be fulfilled.◀

For better control

Indicator lamp in the speedometer lights up. The cruise control system is ready and can be activated.

Malfunction

The warning lamp in the tachometer lights up if the system fails. A message appears on the Control Display.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CONTROLS OVERVIEW

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

FUEL GAUGE

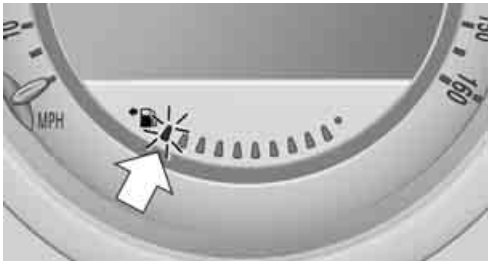

Fuel tank capacity

Approx. 12.4 US gal/47 liters.

You will find information on refueling on page 201.

If the tilt of the vehicle varies for a longer period, when you are driving in mountainous areas, for example, the indicator may fluctuate slightly.

The arrow next to the gas pump symbol of the fuel gauge points toward the side of the vehicle with the fuel filler flap.

Reserve

Once the fuel level has fallen to the reserve zone of approx. 2.1 US gal/8 liters the remaining LEDs change from orange to red, arrow, and a message is displayed briefly on the Control Display. The tachometer displays the remaining cruising range. When the range is less than approx. 30 miles/50 km, the message remains in the Control Display.

If the range displayed is less than 30 miles/50 km, be sure to refuel; otherwise, engine functions are not guaranteed and damage may occur.◀

With a dynamic driving style, e.g. rapid cornering, engine functions are not always assured.

TACHOMETER

Never operate the engine with the needle in the red overspeed zone of the gauge. In this range, the fuel supply is interrupted to protect the engine.

Displays in tachometer

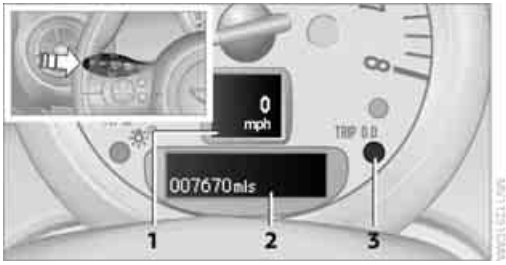

1 Current vehicle speed

2 Odometer in kilometers, trip recorder, external temperature, time

3 Resetting the trip odometer

Press button on turn signal indicator to call up information in the display area **2**.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

The following information is displayed sequentially:

- Trip odometer
- Time
- External temperature

Trip odometer

To display trip recorder:
Briefly press button **3**.

Resetting the trip odometer:
While the trip recorder is displayed and the ignition is switched on, press button **3**.

Time

To set time, see page 66.

External temperature, external temperature warning

When the displayed temperature sinks to approx. +37 °F /+3 °C, a signal sounds and a warning lamp lights up. There is an increased risk of black ice.

Even at temperatures above +37 °F /+3 °C ice can form. Therefore, drive carefully, e.g. on bridges and sections of road in the shade; otherwise, there is an increased accident risk.◀

Units of measure

Select the respective units of measure, miles or km for the odometer as well as °F or °C for the external temperature, page 64.

COMPUTER

Displays in the tachometer

Press the button in the turn signal lever repeatedly to call up various items of information.

The following information is displayed sequentially:

- Cruising range
- Average fuel consumption
- Current fuel consumption
- Average speed

To set the corresponding units of measure, refer to Units of measure on page 64.

Cruising range

Displays the estimated cruising range available with the remaining fuel. The range is calculated on the basis of the way the car has been driven over the last 18 miles/30 km and the amount of fuel currently in the tank.

If the range displayed is less than 30 miles/50 km, be sure to refuel; otherwise, engine functions are not guaranteed and damage could occur.◀

Average fuel consumption

Calculated for the time the engine has been running.

With the trip computer, page 62, you can have the average fuel consumption for another trip displayed.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

To reset average fuel consumption: press the button in the turn signal lever for approx. 2 seconds.

Current fuel consumption

Displays the current fuel consumption to allow you to see whether your current driving style is conducive to fuel economy with minimum exhaust emissions.

Average speed

Periods with the vehicle parked and the engine switched off are not included in the calculations of average speed.

With the trip computer, page 62, you can have the average speed for another trip displayed.

To reset average speed: press the button in the turn signal lever for approx. 2 seconds.

Displays on the Control Display

1. "Vehicle Info"
2. "Onboard info" or "Trip computer"

Displays in the "Onboard info":

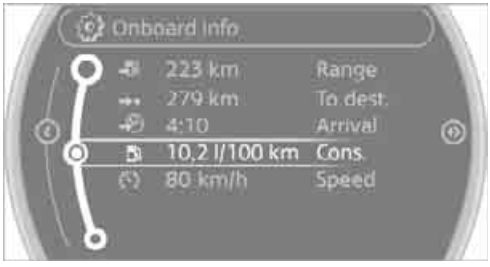

- Cruising range
- Distance from destination
- Probable arrival time when a destination has been input into the navigation system, page 120.

Displays in the "Trip computer":

- Departure time
- Trip duration
- Trip distance

Both displays show:

- Average fuel consumption and
- Average speed.

Resetting the fuel consumption and speed

To reset the values for the average speed and average fuel consumption:

1. Select the respective menu entry.
2. Press the MINI joystick to confirm the message.

Resetting the trip computer

To reset all values:

1. "Vehicle Info"
2. "Trip computer"
3. "Reset"

SETTINGS AND INFORMATION

Operating principle

Certain settings and information are only available when the ignition is switched on, the vehicle is at a standstill and the doors are closed.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

1 Button for:

- Selecting display
- Setting values
- Confirming selected display or set values
- Calling up computer information 61

Symbol	Function
	Adjusting rain sensor 56
	Calling up Check Control 67
	Service requirements 64
	Exiting the menu

Exiting displays

1. Press the button in the turn signal lever repeatedly until "HOME" is displayed.
2. Press the button for a longer period.

Displays are also exited if no entries are made for approx. 8 seconds.

Next setting or item of information

1. While in a setting or information item, press the button in the turn signal indicator repeatedly until "NEXT" is displayed.
2. Press the button for a longer period.

The display changes directly to the next setting or item of information.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

UNITS OF MEASURE

To set the units of measure. The settings are stored for the remote control currently in use, refer also to Personal Profile on page 26.

1. "Settings"
2. "Language/Units"

3. Select the desired menu item.
4. Select the desired unit.

SERVICE REQUIREMENTS

The remaining driving distance and the date of the next scheduled service are briefly displayed immediately after you start the engine or switch on the ignition.

The extent of service work required can be read out from the remote control by your MINI dealer.◀

Possible displays

1 Button for selecting information

Symbol	Function
	Engine oil
	Front brakes
	Rear brakes
	Road worthiness test
	Vehicle check

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Symbol	Function
	Brake fluid
	Exit display 63
	Next setting or item of information 63

More information on the MINI Maintenance System can be found on page 218.

More information

Detailed information on service requirements

You can have further information on the scope of maintenance displayed on the Control Display, refer to page 16.

1. "Vehicle Info"
2. "Vehicle status"

3. "Service required"

Required maintenance procedures and legally mandated inspections are displayed.

You can request more detailed information on every entry:

Select an entry and press the MINI joystick.

To exit from the menu:

Move the MINI joystick to the left. A list of selected maintenance schedules and, if required, legally mandated inspections, is shown.

Symbols

OK No service is currently required.

The deadline for service or a legally mandated inspection is approaching. Please schedule a service appointment.

The service deadline has already passed.

Entering deadlines for legally required inspections

Make sure the date on the Control Display is always set correctly, page 67; otherwise, the effectiveness of Condition Based Service CBS is not ensured.

1. "Vehicle Info"
2. "Vehicle status"
3. "Service required"

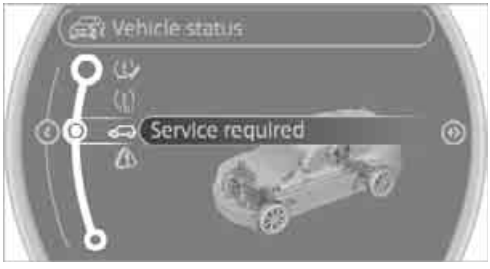

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. "§ Vehicle inspection"

5. Open the deadline entry menu.
6. "Date:"
7. Create the settings.
8. Press the MINI joystick to apply the setting. The year is highlighted.
9. Turn the MINI joystick to make the adjustment.
10. Press the MINI joystick to apply the setting. The date entry is stored.

To exit from the menu:
Move the MINI joystick to the left.

CLOCK

Setting the time

1. "Settings"

2. "Time/Date"

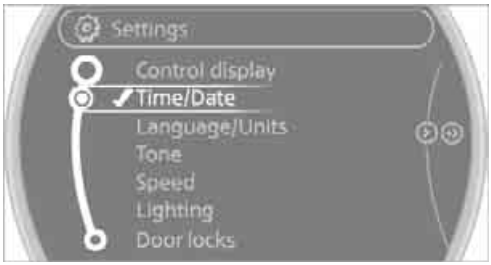

3. "Time:"

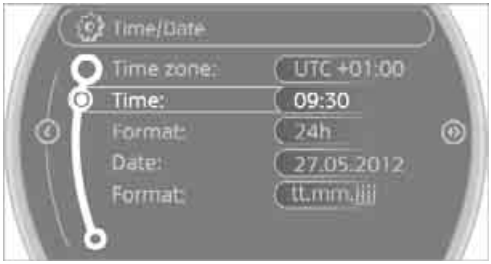

4. Turn the MINI joystick to set the hours and press the MINI joystick.
5. Turn the MINI joystick to set the minutes and press the MINI joystick.

The system accepts the new time.

Setting the time format

The settings are stored for the remote control currently in use, refer also to Personal Profile on page 26.

1. "Settings"
2. "Time/Date"
3. "Format:"
4. Select the desired format and press the MINI joystick.

The time format is stored.

Setting time zone

1. "Settings"
2. "Time/Date"
3. "Time zone:"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. Turn MINI joystick until the desired time zone is set and press the MINI joystick.

   The time zone is stored.

DATE

Setting date

1. "Settings"
2. "Time/Date"
3. "Date:"
4. Turn MINI joystick until the desired day is displayed and press the MINI joystick.
5. Create the necessary settings for the month and year.

The date is stored.

Setting the date format

1. "Settings"
2. "Time/Date"
3. "Format:"

4. Select the desired format.

The settings are stored for the remote control currently in use, refer also to Personal Profile on page 26.

CHECK CONTROL

The concept

The Check Control monitors vehicle functions and alerts you to any malfunctions in the systems monitored. Check Control messages involve indicator and warning lamps in the display and, in some circumstances, an acoustic signal as well as text messages at the bottom of the Control Display.

Indicator and warning lamps

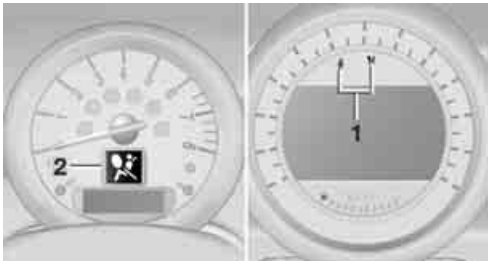

Indicator and warning lamps can light up in various combinations and colors in the indicator areas **1** and **2**.

Text messages

Text messages at the upper edge of the Control Display explain the meaning of the displayed indicator and warning lamps.

Supplemental text messages

For most Check Control messages, you can view more information later, e.g. regarding the cause of a malfunction and how to respond, refer to page 68.

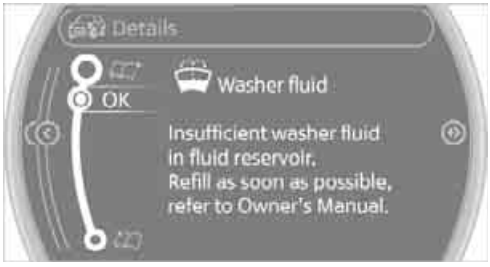

In urgent cases, this information will be shown as soon as the corresponding lamp lights up.

Exit display:
"OK"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Hiding Check Control messages

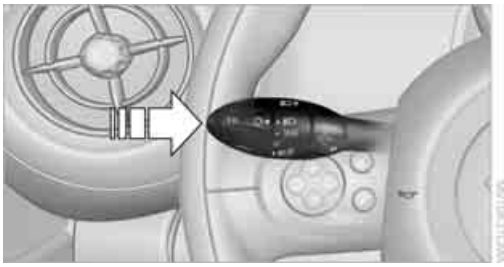

Press the button in the turn signal lever.

- Some Check Control messages are displayed until the malfunctions have been rectified. They cannot be hidden. If several malfunctions occur at the same time, they are displayed in succession.

  They are marked with the symbol shown here.

- Other Check Control messages are automatically hidden after approx. 20 seconds, but remain stored.

  They are marked with the symbol shown here.

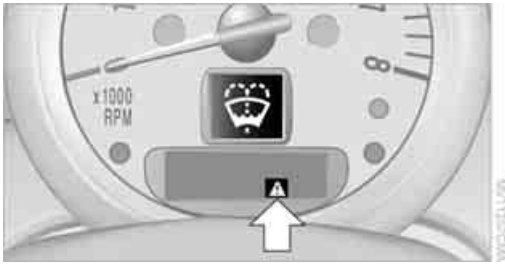

The ⚠ symbol indicates that Check Control messages have been stored. Check Control messages can be viewed whenever it is convenient.

Viewing stored Check Control messages

Stored Check Control messages can only be displayed if the driver's door is closed.

1. Press the button in the turn signal indicator as often as necessary until "SET/INFO" is displayed.
2. Press and hold the button until the display changes.
3. Press the button repeatedly until the corresponding symbol and "CHECK INFO" appear in the display.

4. Press and hold the button.
   If there are no Check Control messages, then "CHECK OK" is displayed.
   If a Check Control message has been stored, the corresponding message is displayed. In addition, the text message appears on the Control Display.
5. Press the button to display any other messages.

Displaying on the onboard computer

1. "Vehicle Info"
2. "Vehicle status"
3. "Check Control"

4. Select a text message.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

SPEED LIMIT

Enter a speed, and a Check Control message will indicate when you reach this speed. This enables you, for example, to receive warnings if you exceed a speed limit in an urban area.
You are only warned of reaching this speed a second time if your vehicle speed falls below it again by at least 3 mph or 5 km/h.

Displaying, setting or changing the limit

1. "Settings"
2. "Speed"
3. "Warning at:"

4. Turn the MINI joystick to set the limit.
5. Press the MINI joystick to apply the setting.

The limit is stored.

Applying your current speed as limit

1. "Settings"
2. "Speed"
3. "Select current speed"

4. Press the MINI joystick.

The system adopts your current speed as the limit.

Activating/deactivating the limit

1. "Settings"
2. "Speed"
3. "Warning"

4. Press the MINI joystick.

ALTERING SETTINGS

Language on the Control Display

1. "Settings"

2. "Language/Units"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

3. "Language:"

4. Select the desired language.

The setting is stored for the remote control currently in use.

Setting the voice dialog

Switch between a standard dialog and a short dialog.

1. "Settings"
2. "Language/Units"
3. "Speech mode:"
4. Select the desired dialog.

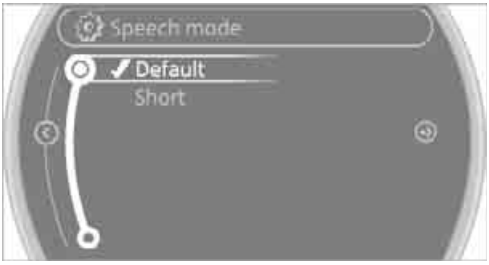

The setting is stored for the remote control currently in use.

Brightness of the Control Display

The brightness is automatically adapted to the ambient lighting conditions. Note, however, that you can change the basic setting while the low beams are switched on. The setting is stored for the remote control currently in use.

1. "Settings"
2. "Control display"
3. "Brightness"

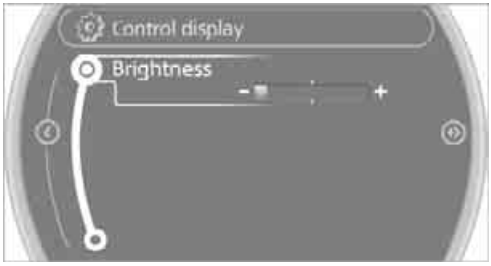

4. Turn the MINI joystick until the desired setting is reached.
5. Press the MINI joystick.

The setting is stored for the remote control currently in use. In bright conditions, for example, the brightness control may not be clearly visible.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

TECHNOLOGY FOR DRIVING COMFORT AND SAFETY

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

PARK DISTANCE CONTROL PDC

The concept

PDC assists you with parking in reverse. Acoustic signals and a visual indicator warn you of the presence of an object behind the vehicle. The measurement is carried out by four ultrasonic sensors in the rear bumper.

These sensors have a range of approx. 6.5 ft/2 m. However, an acoustic warning does not sound until an object is approx. 24 in/60 cm from the rear corner sensors or approx. 5 ft/1.50 m from the rear center sensors. PDC is a parking aid that can indicate objects when they are approached slowly, as is usually the case when parking. Avoid approaching an object at high speed; otherwise, physical circumstances may lead to the system warning being issued too late.◀

Automatic mode

With the engine running or the ignition switched on, the system is activated automatically after approx. 1 second when you engage reverse gear or move the automatic transmission selector lever to position R. Wait this short period before driving.

Acoustic signals

As the distance between vehicle and object decreases, the intervals between the tones become shorter. If the distance to the nearest object falls to below roughly 1 ft/30 cm, then a continuous tone sounds.

If the distance remains constant, e.g. when driving parallel to a wall, the acoustic signal stops after approx. 3 seconds.

Malfunction

Indicator lamp lights up. PDC has failed. A message appears on the Control Display. Have the system checked.

To avoid this problem, keep the sensors clean and free of ice or snow in order to ensure that they will continue to operate effectively. When using a high-pressure cleaner, do not direct the jet toward the sensors for lengthy periods and only spray from a distance of at least 4 in/10 cm.

PDC with visual warning

To have the system show distances to objects on the Control Display. The contours of distant objects are shown on the Control Display even before the acoustic signal sounds. The display appears on the Control Display as soon as the transmission is shifted into reverse or the selector lever is moved into the R position.

System limitations

Even with PDC, final responsibility for estimating the distance between the vehicle and any obstructions always remains with the driver. Sensors, too, have blind spots in which objects cannot be detected. Moreover, ultrasonic detection can reach its physical limits with objects such as trailer tow bars and couplings, thin and wedge-shaped objects, etc. Low objects already indicated, such as curbs, may

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

enter the sensors' blind spots before or after a continuous audible signal is given. Higher, protruding objects, such as wall ledges, may not be detectable. Therefore, always drive cautiously; otherwise, there is a risk of personal injury or property damage. Loud sound sources outside or inside the car can drown out the PDC signal.◀

DRIVING STABILITY CONTROL SYSTEMS

Your MINI has a number of systems that help to maintain the vehicle's stability even in adverse driving conditions.

The laws of physics cannot be repealed, even with driving stability control systems. An appropriate driving style always remains the responsibility of the driver. Therefore do not reduce the additional safety margin by engaging in hazardous driving thereby running the risk of an accident.◀

Antilock Brake System ABS

ABS prevents locking of the wheels during braking. Safe steering response is maintained even during full braking. Active safety is thus increased.

Braking safely, refer to page 105.

ABS is operational every time you start the engine.

Cornering Brake Control CBC

Driving stability and steering characteristics are further enhanced while braking in turns or during a lane change.

Electronic brake-force distribution EBV

The system controls the brake pressure in the rear wheels to ensure stable braking behavior.

Brake Assist

Rapidly depressing the brake causes this system to automatically develop maximum braking force. Thus, the system helps keep braking distance to a minimum. At the same time, all the benefits provided by ABS are exploited.

Do not reduce the pressure on the brake for the duration of the full braking application.

Dynamic Stability Control DSC

The concept

DSC prevents the driving wheels from losing traction when you pull away from rest or accelerate.

DSC also detects unstable driving conditions such as when the vehicle's rear end fishtails or the vehicle is sliding on its front wheels. In these cases, DSC helps the vehicle maintain a safe course within physical limits by reducing engine output and through braking actions at the individual wheels.

Every time that the engine is started, DSC is ready to operate.

Deactivating DSC

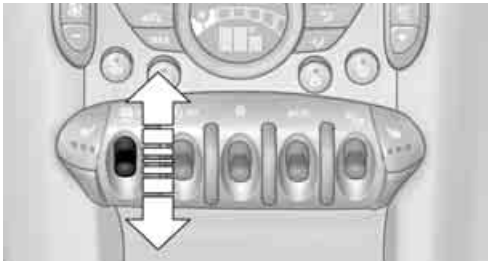

Press the switch until the DSC OFF indicator lamp on the speedometer lights up and DSC OFF is displayed on the tachometer. DSC is deactivated. Stabilizing and propulsion promoting actions are no longer executed.

When driving with snow chains or to 'rock free' in snow, it can be helpful to switch off DSC for a brief period.

To increase vehicle stability, activate DSC again as soon as possible.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Activating DSC

Press the switch again: the DSC indicator lamps in the display elements go out.

For better control

The indicator lamp on the tachometer is flashing:
DSC controls the driving and braking forces.

The indicator lamp DSC OFF on the speedometer is on and DSC OFF is displayed on the tachometer:
DSC is deactivated.

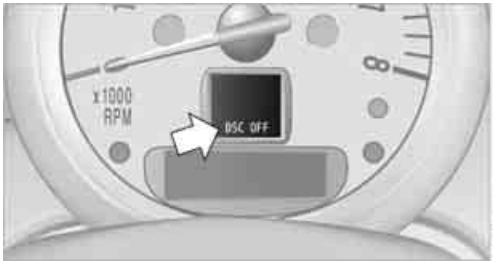

Dynamic Traction Control DTC

The concept

DTC is a type of DSC that is propulsion optimized for special road conditions such as uncleared snowy roads. The system ensures maximum propulsion though with restricted driving stability. You therefore need to drive with suitable caution.

In the following exceptional situations, it can be useful to briefly activate DTC:

- When driving on snow-covered inclines, in slush, or on uncleared snowy roads
- When rocking the vehicle free, driving out of deep snow or on loose surfaces
- When driving with snow chains

Activating DTC

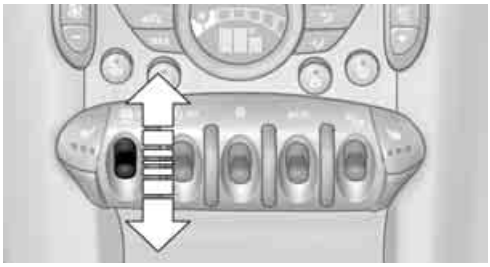

Press the switch; the indicator lamp DSC OFF on the speedometer comes on and TRACTION is displayed on the tachometer.
The Dynamic Stability Control DSC is deactivated; the Dynamic Traction Control DTC is activated.

For better control

The indicator lamp on the tachometer is flashing:
DTC controls the driving and braking forces.

The indicator lamp on the speedometer is on and TRACTION is displayed on the tachometer:
DTC is activated.

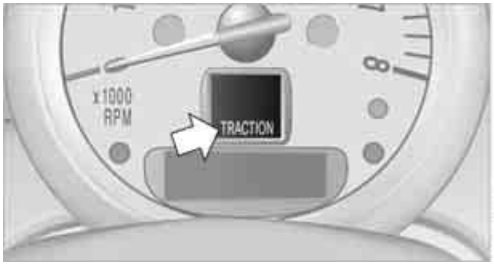

Deactivating DTC

Press switch again, the indicator lamps DSC OFF on the speedometer and TRACTION on the tachometer go out.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Deactivating both DTC and DSC

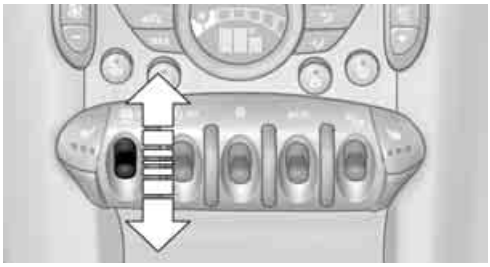

Press the switch for at least 3 seconds; the indicator lamp DSC OFF on the speedometer comes on and DSC OFF is displayed on the tachometer. The Dynamic Traction Control DTC and Dynamic Stability Control DSC are both deactivated. There will be no more stabilizing interventions.

Interventions (differential lock) in braking occur to improve propulsion when drive wheels are rotating unevenly, even when DSC is deactivated.

Activating DSC

Press the switch again: the indicator lamps in the display elements go out.

Hill Assist

Hill Assist aids you in comfortably driving off on inclines. It is not necessary to use the parking brake for this.

1. Hold the MINI with the brake.
2. Release the brake and immediately drive off.

Hill Assist holds the car in place for approx. 2 seconds after the brake is released.

Depending on the load and gradient, the vehicle can roll backward slightly during this period. After you release the brake, immediately start driving since the Hill Assist only holds the vehicle for about 2 seconds, and it will start to roll backward.◀

ALL4 all-wheel drive system

ALL4 is the all-wheel drive system of your MINI. The combined effects of ALL4 and DSC further optimize the traction and dynamic driving characteristics. The ALL4 all-wheel drive system variably distributes the drive force to the front and rear axle depending on the driving situation and prevailing road conditions.

SPORT BUTTON

Pressing the button causes your MINI to respond even more sportily.

- Engine responds more spontaneously to movements of the accelerator.
- Steering response is more direct.
- Cooper S, John Cooper Works: the engine sounds more sporty in coasting mode.

With automatic transmission:

- More rapid gear shifting in Sport program.

Activating the system

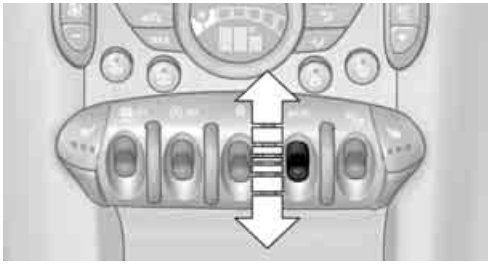

Press the switch.
The LED lights up.

SPORT is briefly displayed in the tachometer.

Deactivating the system

- Press the switch again.
- Switch off the engine.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

FLAT TIRE MONITOR FTM

The concept

The system does not measure the actual inflation pressure in the tires.

The system detects a pressure loss in a tire by comparing the rotational speeds of the individual wheels while moving.

In the event of a pressure loss, the diameter and therefore the rotational speed of the corresponding wheel change. This is detected and reported as a flat tire.

Functional requirement

The system must have been initialized while the tire inflation pressure was correct; otherwise, reliable signaling of a flat tire is not ensured.

Initialize the system after every correction of the tire inflation pressure and after every tire or wheel change.

System limitations

Sudden serious tire damage caused by external influences cannot be indicated in advance.◀

A natural, even pressure loss in all four tires cannot be detected. Therefore, check the tire inflation pressure regularly.

In the following situations, the system could be delayed or malfunction:

- System has not been initialized
- Driving on snowy or slippery road surface
- Performance-oriented style of driving: slip in the drive wheels, high lateral acceleration
- Snow chains are attached

Status display

The current status of the Flat Tire Monitor can be displayed on the Control Display, e.g. whether or not the FTM is active.

1. "Vehicle Info"
2. "Vehicle status"
3. "Flat Tire Monitor"

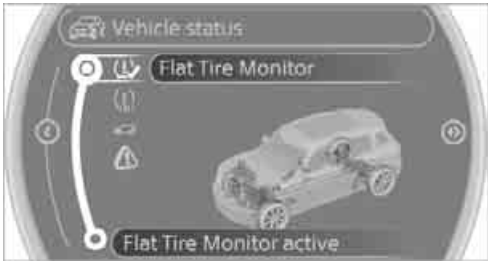

The status is displayed.

Initializing the system

The initialization process adopts the set inflation tire pressures as reference values for the detection of a flat tire. Initialization is started by confirming the inflation pressures.

Do not initialize the system when driving with snow chains.

1. "Vehicle Info"
2. "Vehicle status"
3. "Reset"

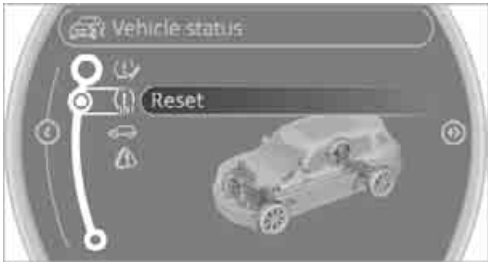

4. Start the engine, but do not start driving.
5. Select "Reset" to start the initialization.
6. Start to drive.

The initialization is completed during driving, which can be interrupted at any time. When driving resumes, the initialization is continued automatically.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Indication of a flat tire

The warning lamps come on in yellow and red. A message appears on the Control Display. An acoustic signal also sounds.

There is a flat tire or a major loss in tire inflation pressure.

1. Reduce speed and stop the vehicle with caution. Avoid sudden braking and steering maneuvers.
2. Check whether the vehicle is equipped with normal tires or with run-flat tires.

   Run-flat tires, refer to page 212, are identified by a circular symbol containing the letters RSC on the tire sidewall.

If the vehicle is not equipped with run-flat tires, do not continue driving; continuing to drive can result in serious accidents.◀

When a flat tire is reported, the Dynamic Stability Control DSC is activated.

Actions in the event of a flat tire

Normal tires

1. Identify the damaged tire.

   To do so, check the inflation pressure in all four tires.
   The inflation pressure display of the Mobility Kit, page 230, can be used for this purpose.

   If the inflation pressure in all four tires is correct, the Flat Tire Monitor might not have been initialized. The system must then be initialized.

   If it is not possible to identify the damaged tire, contact your MINI dealer
2. Use the Mobility Kit to remedy the flat tire on the damaged wheel, refer to page 230.

Run-flat tires

You can continue driving with a damaged tire at speeds up to 50 mph or 80 km/h.

Continued driving with a flat tire

When driving with a damaged tire:

1. Avoid sudden braking and steering maneuvers.
2. Do not exceed a speed of 50 mph or 80 km/h.
3. At the next opportunity, check the air pressure in all four tires.

   If the inflation pressure in all four tires is correct, the Flat Tire Monitor might not have been initialized. The system must then be initialized.

Possible driving distance with complete loss of tire inflation pressure:

The distance it is possible to drive depends on the load and the stress on the vehicle while driving.

With an average load, it may be possible to drive for approx. 50 miles/80 km.

When driving with damaged tires, the handling characteristics change, e.g. the vehicle will skid sooner when braking, braking distances will be longer, or self-steering response will change. Adapt your driving style accordingly. Avoid turning abruptly and driving over obstacles such as curbs, potholes, etc.

Since the possible driving distance depends to a considerable degree on the strain exerted on the vehicle while driving, it can be shorter or, with a gentle driving style, can also be longer, depending on the speed, road condition, external temperature, vehicle load, etc.

Drive cautiously and do not exceed a speed of 50 mph/80 km/h.
A loss of tire inflation pressure results in a change in the handling characteristics, e.g. reduced lane stability during braking, a longer braking distance and altered self-steering properties.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Vibrations or loud noises while driving can indicate final failure of the tire. Reduce your speed and bring the vehicle to a stop; otherwise, pieces of tire may come off, which could result in an accident. Do not continue driving and contact your MINI dealer.◀

TIRE PRESSURE MONITOR TPM

The concept

Measuring the inflation pressure in the four mounted tires. The system notifies you if there is a significant loss of pressure in one or more tires.

Functional requirement

The system must have been reset while the inflation pressure was correct; otherwise, reliable signaling of a flat tire is not ensured.

Always use wheels with TPM electronics to ensure that the system will operate properly.

Reset the system again after each correction of the tire inflation pressure and after every tire or wheel change.

System limitations

Sudden, serious tire damage caused by external influences cannot be indicated in advance.◀

The system does not operate correctly if it has not been reset. For example, a flat tire may be indicated despite correct tire inflation pressures.

The system is inactive and cannot indicate a flat tire:

- If a wheel without TPM electronics is mounted
- Interference with TPM by other systems or devices with the same transmission frequency.

Status display

The current status of the Tire Pressure Monitor can be displayed by the onboard computer, e.g. whether or not the TPM is activated.

1. "Vehicle Info"
2. "Vehicle status"
3. "Tire Pressure Monitor - TPM"

The status is displayed.

Status indicator on the onboard computer

The tire and system condition is indicated by the color of the tires.

A change in the tire inflation pressure during driving is taken into account.

A correction is only required when this is indicated by the TPM.

Green wheels

The inflation pressure corresponds to the desired state.

"TPM active" is displayed on the onboard computer.

One wheel yellow

There is a flat tire or substantial loss of tire pressure in the indicated tire.

All wheels yellow

- There is a flat tire or substantial loss of tire pressure in one or more tires.
- The system was not reset after a wheel change and thus issues a warning based on the inflation pressures initialized last.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Gray wheels

The system cannot detect a puncture.

Reasons for this may be:

- TPM is being reset.
- Interference from systems or devices with the same transmission frequency.
- Malfunction.

Resetting system

Reset the system again after each correction of the tire inflation pressure and after every tire or wheel change.

1. "Vehicle Info"
2. "Vehicle status"
3. "Reset"

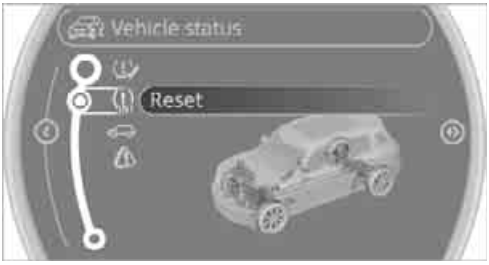

4. Start the engine – do not drive away.
5. Select "Reset" to start the initialization.
6. Start to drive.

The tires are shown in gray and "Resetting TPM..." is displayed.

After driving a few minutes, the set inflation pressures in the tires are accepted as the target values to be monitored. The resetting process is completed automatically as you drive. The tires are depicted in green on the Control Display and "Status: TPM active" is displayed again.

The trip can be interrupted at any time. When driving resumes, resetting is continued automatically.

If a flat tire is detected while the system is resetting, all tires on the Control Display are displayed in yellow. The message "Low tire!" is displayed.◀

Message with low tire inflation pressure



The warning lamps come on in yellow and red. A message appears on the onboard computer. An acoustic signal also sounds.

- There is a flat tire or substantial loss in tire pressure in the displayed tire.
- The system was not reset after a wheel change and thus issues a warning based on the inflation pressures initialized last.

1. Reduce speed and stop the vehicle with caution. Avoid sudden braking and steering maneuvers.
2. Check whether the vehicle is equipped with normal tires or with run-flat tires.

   Run-flat tires, refer to page 212, are identified by a circular symbol containing the letters RSC on the tire sidewall.

When a low inflation pressure is reported, the Dynamic Stability Control DSC is activated.

Actions in the event of a flat tire

Normal tires

1. Identify the damaged tire.

   To do so, check the inflation pressure in all four tires. The inflation pressure display of the Mobility Kit, page 230, can be used for this purpose.

   If the inflation pressure is correct in all four tires, then the Tire Pressure Monitor may not have been reset. The system must then be reset.

   If it is not possible to identify the damaged tire, contact your MINI dealer.

2. Use the Mobility Kit to remedy the flat tire on the damaged wheel, refer to page 230.

   The use of tire sealant, e.g. Mobility Kit, can damage the TPM wheel electronics. In this case, have the electronics checked and replaced if necessary at your earliest opportunity.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Run-flat tires

You can continue driving with a damaged tire at speeds up to 50 mph/80 km/h.

If the vehicle is not equipped with run-flat tires, do not continue driving; continuing to drive can result in serious accidents.◀

Continued driving with a flat tire

When driving with a damaged tire:

1. Avoid sudden braking and steering maneuvers.
2. Do not exceed a speed of 50 mph or 80 km/h.
3. At the next opportunity, check the air pressure in all four tires.

   If the inflation pressure is correct in all four tires, then the Tire Pressure Monitor may not have been reset. The system must then be reset.

Possible driving distance with complete loss of tire inflation pressure:

The distance it is possible to drive depends on the load and the stress on the vehicle while driving.

With an average load, it may be possible to drive for approx. 50 miles/80 km.

When driving with damaged tires, the handling characteristics change, e.g. the vehicle will skid sooner when braking, braking distances will be longer, or self-steering response will change. Adapt your driving style accordingly. Avoid turning abruptly and driving over obstacles such as curbs, potholes, etc.

Since the possible driving distance depends to a considerable degree on the strain exerted on the vehicle while driving, it can be shorter or, with a gentle driving style, can also be longer, depending on the speed, road condition, external temperature, vehicle load, etc.

Drive cautiously and do not exceed a speed of 50 mph/80 km/h.
A loss of tire inflation pressure results in a change in the handling characteristics, e.g. reduced lane stability during braking, a longer braking distance and altered self-steering properties.◀

Vibrations or loud noises while driving can indicate complete failure of the tire. Reduce your speed and bring the vehicle to a stop; otherwise, pieces of tire may come off, which could result in an accident. Do not continue driving and contact your MINI dealer.◀

Malfunction

The small warning lamp flashes in yellow and then lights up continuously; the larger warning lamp lights up in yellow. On the onboard computer, the tires are shown in gray and a message appears.

No flat tire can be detected.

Display in the following situations:

- Wheel without TPM electronics is mounted:
  If need be, have it checked by your MINI dealer.
- Malfunction:
  Have the system checked
- TPM was unable to complete the resetting procedure; reset the system again.

The small warning lamp flashes in yellow and then lights up continuously; the larger warning lamp lights up in yellow. On the onboard computer, the tires are shown in gray and a message appears.

No flat tire can be detected.

Display in the following situation:

- Interference due to systems or devices that use the same radio frequency:
  The system automatically reactivates once it is outside of the field of interference.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Message for unsuccessful system reset

Yellow warning lamp comes on. A message appears on the onboard computer.

The system has detected a wheel change, but has not yet been reset. It is not possible to provide a reliable warning about the current inflation pressure.

Check the tire inflation pressure and reset the system, page 78.

Declaration according to NHTSA/ FMVSS 138 Tire Pressure Monitoring Systems

Each tire, including the spare, should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tire inflation pressure label. If your vehicle has tires of a different size than the size indicated on the vehicle placard or tire inflation pressure label, you should determine the proper tire inflation pressure for those tires. As an added safety feature, your vehicle has been equipped with a tire pressure monitoring system TPMS that illuminates a low tire pressure telltale when one or more of your tires are significantly underinflated. Accordingly, when the low tire pressure telltale illuminates, you should stop and check your tires as soon as possible, and inflate them to the proper pressure. Driving on a significantly underinflated tire causes the tire to overheat and can lead to tire failure. Underinflation also reduces fuel efficiency and tire tread life, and may affect the vehicle's handling and stopping ability. Please note that the TPMS is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if underinflation has not reached the level at which the TPMS low tire pressure telltale illuminates.

The TPMS malfunction indicator is combined with the low tire pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously lit. This sequence will continue upon subsequent vehicle startups as long as the malfunction exists. When the malfunction indicator is illuminated, the system may not be able to detect or signal low tire pressure as intended. TPMS malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tires or wheels on the vehicle that prevent the TPMS from functioning properly. Always check the TPMS malfunction telltale after replacing one or more tires or wheels on your vehicle to ensure that the replacement or alternate tires and wheels allow the TPMS to continue to function properly.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AIRBAGS

MINI Countryman:

MINI Paceman:

The following airbags are located under the marked covers:

1 Front airbags

2 Knee airbag

3 Side airbags in backrests

4 Head airbags at the front and rear

Protective action

Observe the instructions on page 38 to ensure the best possible personal protection.◀

The front airbags help protect the driver and front passenger by responding to frontal impacts in which safety belts alone cannot provide adequate restraint. When needed, the head and side airbags help provide protection in the event of side impact. The relevant side airbag supports the side upper body area. The head air bag supports the head.

The airbags are designed to not be triggered in every type of collision, e.g. not in minor accidents, certain rollover situations or rear impacts.

Do not apply adhesive materials to the cover panels of the airbags, cover them or modify them in any other way.

Keep the dashboard and window on the passenger side free from obstruction, i.e. do not cover it with adhesive film or coverings, and do not affix any holders such as for a navigation device or a mobile phone.

Do not attach seat covers, cushions or other objects not specifically approved for seats with integral side airbags to the front seats. Do not hang items of clothing such as coats or jackets over the backrests. Do not attempt to remove the airbag retention system from the vehicle. Do not modify the individual components of the system or its wiring in any way. This includes the

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

upholstery in the center of the steering wheel, on the instrument panel, the doors, and the roof pillars as well as the sides of the headliner. Do not attempt to remove or dismantle the steering wheel.◀

Do not touch the individual components immediately after the system has been triggered, because there is a danger of burns.

Have the testing, repair, removal, and disposal of airbag generators executed only by your MINI dealer or a workshop that has the required explosives licenses.

Otherwise, unprofessional attempts to service the system could lead to failure in an emergency or undesired airbag activation, either of which could result in personal injury.◀

Warning notices and information about the airbags can also be found on the sun visors.

Automatic deactivation of the front passenger airbags

The presence of a passenger in the front passenger seat is detected by measuring the resistance of the human body. The system correspondingly activates or deactivates the front, side, and knee airbags for the front passenger.

Make sure that the front passenger's feet remain in the footwell; otherwise, it is not possible to guarantee the function of the front passenger airbags.◀

The indicator lamp above the interior rearview mirror shows the current status of the front passenger airbags, deactivated or activated, refer to Status of front passenger airbags below.

Before transporting a child on the front passenger seat, read the safety information and follow the instructions under Transporting children safely, page 46.◀

Malfunction of the automatic deactivation

When teenagers and adults assume certain sitting positions, this can cause the front, side, and knee airbags to deactivate. The indicator lamp for the front passenger airbags lights up when this occurs. In such cases, the passenger should change his or her sitting position so that the front passenger airbags are activated and the indicator lamp goes out. If the desired airbag status cannot be achieved by changing the sitting position, transport the relevant passenger on a rear seat.

- Do not attach covers, cushions, ball mats or other items to the front passenger seat unless they are specifically recommended by the manufacturer of your MINI.
- Do not place items on the front passenger seat.
- Do not place items under the seat which could press against the seat from below.

Status of front passenger airbags

The indicator lamp for the front passenger airbags shows the functional status of the front passenger's front, side, and knee airbags in accordance with whether and how the front passenger seat is occupied. The indicator lamp shows whether the front passenger airbags are activated or deactivated.

- The indicator lamp lights up when a child in a specially designated child restraint system is properly detected on the seat or the seat is unoccupied.
  The front, side, and knee airbags for the front passenger are not activated.

  Most child seats are detected by the system. This particularly applies to child seats that were required by NHTSA at the time of manufacture of the vehicle. After

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

installing a child seat, check that the indicator lamp for the front passenger airbags lights up. It indicates that the child seat has been detected and that the front passenger airbags are deactivated.◀

- The indicator lamp does not come on as long as a person of sufficient size and in a correct sitting position is detected on the seat. The front, side, and knee airbags for the front passenger are activated.

Operational readiness of airbag system

As of radio readiness, page 50, the warning lamp lights up briefly to indicate that the entire airbag system and the belt tensioners are operational.

Airbag system malfunction

- The warning lamp does not come on when radio readiness is switched on.
- The warning lamp stays lit continuously.

In the event of a fault in the airbag system, have it checked without delay; otherwise, there is the risk that the system will not function as intended even if a severe accident occurs.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

LAMPS

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

PARKING LAMPS/LOW BEAMS

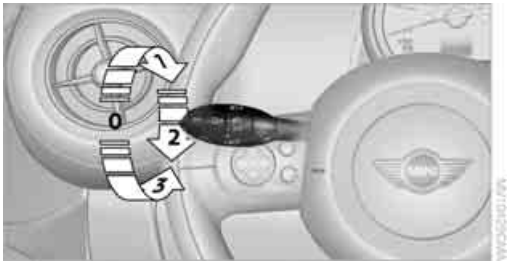

0 Lamps off / daytime running lights

1 Parking lamps and daytime running lights

2 Low-beam headlamps and welcome lamps

3 Automatic headlamp control, daytime running lights, welcome lamps, and Adaptive Light Control

When you open the driver's door with the ignition switched off, the exterior lighting is automatically switched off if the light switch is in position **0**, **2** or **3**.

Switch on the parking lamps if necessary, switch position **1**.

Parking lamps

Turn the light switch to position **1**.
The front, rear and side vehicle lighting is switched on.

Activation of lights on one side of the vehicle for parking, page 86.

The parking lamps will discharge the battery. Therefore, do not leave them on for unduly long periods of time; otherwise, the battery might not have enough power to start the engine.◀

Low beams

Turn the light switch to position **2**.
The low beams come on when the ignition is on.

Automatic headlamp control

When the switch is in position **3**, the low beams are switched on and off automatically depending on ambient light conditions, e.g. in a tunnel, in twilight, or if there is precipitation. Adaptive Light Control is active.

The headlamps may also come on when the sun is sitting low on a blue sky.

When driving into tunnels with bright overhead lights, there may be a delay before the headlamps come on.

The low beams remain switched on independent of the ambient lighting conditions when you switch on the fog lamps.

If the daytime running lights are activated, page 85, the low beams are always switched on with the light switch in position **3** and the ignition on. The exterior lamps are automatically switched off after the vehicle is parked.

The automatic headlamp control cannot serve as a substitute for your personal judgment in determining when the lamps should be switched on in response to ambient lighting conditions. For example, the system cannot detect fog or hazy weather. To avoid safety risks, you should respond to these kinds of low-visibility situations by switching the headlamps on manually.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Welcome lamps

If you leave the light switch in the low beam or automatic headlamp control position when you switch off the ignition, the parking lamps and interior lamps come on for a certain time as soon as the vehicle is unlocked.

Pathway lighting

If you activate the headlamp flasher after switching off the ignition with the lamps switched off, the low beams come on and remain on for a certain time.

The setting is stored for the remote control in use, refer to Personal Profile, page 26.

Setting the duration or deactivating the function

1. "Settings"
2. "Lighting"
3. "Pathway light.:"
4. Set a time of duration or deactivate the function.

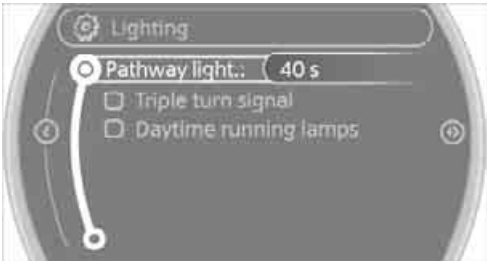

The setting is stored for the remote control currently in use.

Daytime running lights

The light switch can remain in the lamps off, parking lamps or automatic headlamp control position.
In the lamps off position, the exterior lighting is automatically switched off after the vehicle is parked. In the parking lamps position, the parking lamps will stay on after the ignition is switched off.

Switch on the parking lamps separately if needed.

Depending on the national-market version, it may not be possible to deactivate the daytime running lights.

Activating/deactivating daytime running lights

The setting is stored for the remote control in use, refer to Personal Profile, page 26.

1. "Settings"
2. "Lighting"
3. "Daytime running lamps"

The setting is stored for the remote control currently in use.

ADAPTIVE LIGHT CONTROL

The concept

Adaptive Light Control is a variable headlamp control system that enables better illumination of the road surface. Depending on the steering angle and other parameters, the light from the headlamp follows the course of the road.

Activating Adaptive Light Control

With the ignition switched on, turn the light switch to position **3**, refer to page 84.

Standstill function: to avoid blinding oncoming traffic, the Adaptive Light Control does not pivot toward the driver's side when the vehicle is at a standstill.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

In reverse, the Adaptive Light Control is not activated.

Malfunction

A message is displayed.

The Adaptive Light Control is malfunctioning or failed. Have the system checked as soon as possible.

HIGH BEAMS/ ROADSIDE PARKING LAMPS

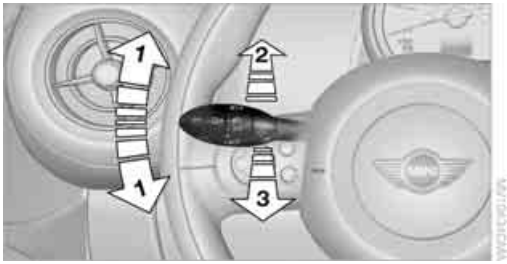

1 Turn signals/roadside parking lamps

2 Switching on high beams

3 Switching off high beams/headlamp flasher

Roadside parking lamps, left or right

The vehicle can be illuminated on one side for parking. Comply with local regulations when doing so.

Switching on

After parking the vehicle, press and hold the lever up or down, arrow **1**.

The roadside parking lamps drain the battery. Therefore, do not leave them on for unduly long periods of time; otherwise, the battery might not have enough power to start the engine.◀

Switching off

Press the lever up or down to the pressure point.

FRONT FOG LAMPS

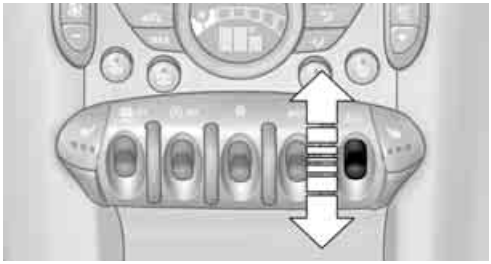

Turn on front fog lamps:
Press the switch.

To switch them off, press the switch upward or downward again.

Front fog lamps

The parking lamps or low beams must be switched on for the fog lamps to operate. The green indicator lamp lights up when the fog lamps are switched on.

Depending on your vehicle's equipment, the fog lamps are switched off when you activate the headlamp flasher or switch on the high beams.

If the automatic headlamp control is activated, the low beams will come on automatically when you switch on the fog lamps.◀

INSTRUMENT LIGHTING

You can adjust the brightness of the instrument lighting only when the parking lamps or the low beams are on.
The intensity of the brightness changes up to a predetermined end point, and then decreases.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Adjusting brightness

- Briefly press button: brightness changes in stages.
- Press and hold the button. Brightness changes in a continuous manner.

INTERIOR LAMPS

The interior lamps, the footwell lamps, the entry lamps, and the cargo area lamp are controlled automatically.

To reduce the drain on the battery, a short while after the ignition is switched off, refer to Start/Stop button on page 50, all lights in the vehicle's passenger compartment are switched off.◀

Switching interior lamps on/off manually

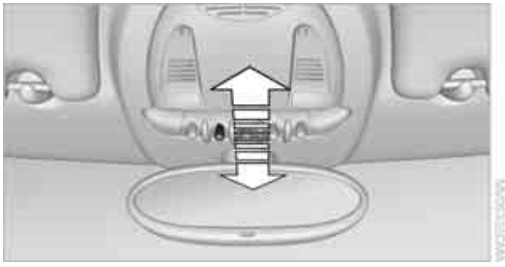

To switch the interior lamps on/off.

Press the switch.

To switch off the interior lamps permanently, press the switch for about 3 seconds.

Reading lamps

Reading lamps are provided in the front and rear adjacent to the interior lamps.

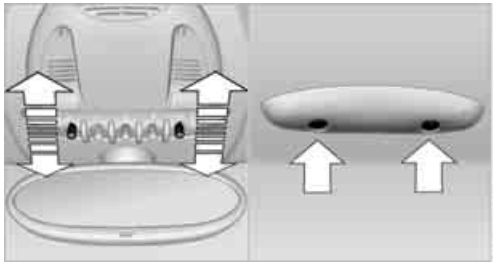

To switch the reading lamps on and off.

In the front: press the switch.

In the rear: press the button.

Ambient lighting

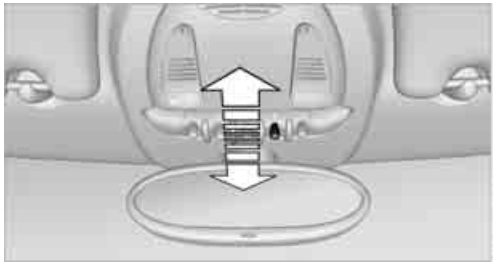

The color and brightness of the ambient lighting can be changed.

- Press the switch forward.
  The color changes in stages.
- Press the switch toward the rear.
  The brightness changes in stages.

Intermediate settings and colors are possible.

For a continuous color change in the ambient lighting, press and hold the switch forward for longer than 10 seconds.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CLIMATE

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

AIR CONDITIONER

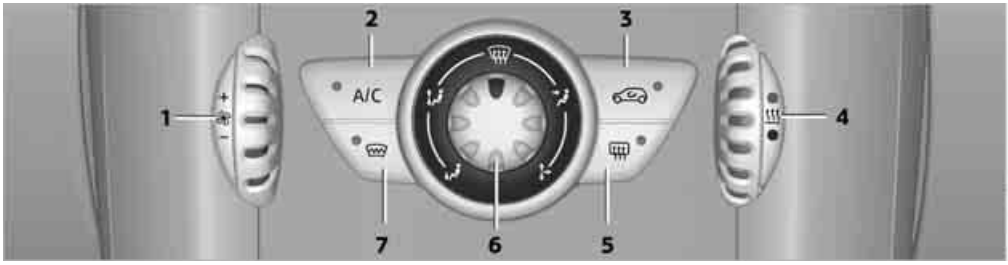

1 Air flow rate
2 Cooling function
3 Recirculated-air mode
4 Temperature
5 Rear window defroster
6 Air distribution
7 Windshield heating

Air flow rate

Adjust the air flow rate. The higher the rate, the more effective the heating or cooling will be.

The air flow rate is lowered or switched off entirely to reduce the drain on the battery.

Switching the system on/off

Turn the air flow rate rotary switch to 0. Blower and air conditioner are completely switched off and the air supply is cut off.

Set any desired air flow rate to switch on the air conditioner.

Cooling function

When the cooling function is on, the air is cooled, dried, then reheated according to the temperature setting. The passenger compartment can only be cooled while the engine is running.

The cooling function helps prevent condensation on the windows or removes it quickly.

Depending on the weather, the windshield may fog over briefly when the engine is started.

To cool the air more quickly and intensely when the external temperature is high, you can switch on the recirculated-air mode.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Recirculated-air mode

If the air outside the car has an unpleasant odor or contains pollutants, shut off the supply to the interior of the car temporarily. The system then recirculates the air currently within the vehicle.

If the windows fog in recirculated-air mode, switch off the recirculated-air mode and increase the air volume if necessary. Ensure that air can flow onto the windshield.

The recirculated-air mode is automatically deactivated at low outside temperatures.

The recirculated-air mode should not be used over an extended period of time; otherwise, the air quality in the passenger compartment will deteriorate continuously.◀

Temperature

Turn upward, red, to increase the temperature.
Turn downward, blue, to decrease the temperature.

Rear window defroster

The defroster is switched off automatically after a certain time.

The rear window heating is lowered or switched off entirely to reduce the drain on the battery.

Air distribution

Direct the flow of air to the windows, to the upper body area or to the footwell. Intermediate settings are possible.

Windshield heating

The windshield heating is switched off automatically after a short time.

The front window heating is lowered or switched off entirely to reduce the drain on the battery.

Defrosting windows and removing condensation

1. Set air flow rate to the maximum level.
2. Set air distribution to position . Condensation is removed from the windows more quickly when the cooling function is also activated.
3. Set to the highest temperature, red.
4. Deactivate recirculated-air mode.
5. Turn on windshield heating if necessary.
6. Turn on rear window defroster if necessary.

Microfilter

The microfilter captures dust and pollen. The microfilter is changed by your MINI dealer during routine maintenance work.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AUTOMATIC CLIMATE CONTROL

1 Air flow rate, manual
2 AUTO program
3 Recirculated-air mode
4 Maximum cooling
5 Air distribution, manual
6 Temperature
7 Defrosting windows and removing condensation
8 Cooling function
9 Rear window defroster
10 Windshield heating

Comfortable interior climate

AUTO program **2** offers the ideal air distribution and air flow rate for almost all conditions, refer to AUTO program below. All you need to do is select an interior temperature which is comfortable for you.

The following sections inform you in detail about how to adjust the settings.

Most settings are stored for the remote control currently in use, refer also to Personal Profile settings on page 27.

Air flow rate, manual

Press the – button to reduce air flow. Press the + button to increase it.

You can reactivate the automatic mode for the air flow rate with the AUTO button.

The air flow rate is lowered or switched off entirely to reduce the drain on the battery. The display remains the same.

Switching the system on/off

Reduce the air flow by pressing the – button repeatedly until the system is switched off. All displays go out.

Press the AUTO button to switch the automatic climate control back on.

AUTO program

The AUTO program adjusts the air distribution to the windshield and side windows, toward the upper body area and into the footwell for you. The air flow rate and your temperature specifications will be adapted to outside influences in accordance with seasonal changes, e.g. sunlight.

The cooling function is automatically switched on along with the AUTO program.

The program is switched off if the air distribution is manually adjusted or if the button is pressed again.

Recirculated-air mode

If the air outside the car has an unpleasant odor or contains pollutants, shut off the supply to the interior of the car temporarily. The system then recirculates the air currently within the vehicle.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

If condensation starts to form on the inside window surfaces, press the AUTO button or switch off the recirculated-air mode and, if necessary, increase the air flow rate. Ensure that air can flow onto the windshield.

The recirculated-air mode is automatically deactivated at low outside temperatures.

The recirculated-air mode should not be used over an extended period of time; otherwise, the air quality in the passenger compartment will deteriorate continuously.◀

Maximum cooling

The automatic climate control switches to the lowest temperature, high airflow and the recirculated-air mode.

For maximum cooling, open the air vents for the upper body area.

The air is cooled as quickly as possible:

- For an outside temperature of more than 32 °F /0 °C
- While the motor is running.

Air distribution, manual

The flow of air is directed to the windows, to the upper body area or to the footwell as selected.

You can switch the automatic air distribution back on by pressing the AUTO button.

Temperature

Set the desired temperature individually.

The automatic climate control achieves this temperature as quickly as possible regardless of the season, using maximum cooling or heating power if necessary, and then maintains it.

If you switch between different temperature settings in quick succession, the automatic climate control does not have enough time to achieve the set temperature.◀

Rear window defroster

The defroster is switched off automatically after a certain time.

Depending on your vehicle's equipment, the upper wires serve as an antenna and are not part of the rear window defroster.

Defrosting windows and removing condensation

Quickly removes ice and condensation from the windshield and front side windows.

For this purpose, also switch on the cooling function.

The windshield heating is switched on automatically.

Windshield heating

The windshield heating is switched off automatically after a certain time.

Cooling function

When the cooling function is on, the air is cooled, dried, then reheated according to the temperature setting. The passenger compartment can only be cooled while the engine is running.

The cooling function helps prevent condensation on the windows or removes it quickly.

Depending on the weather, the windshield may fog over briefly when the engine is started. The recirculated-air mode may be switched on automatically.

When the AUTO button is pressed, the cooling function switches on automatically.

Microfilter/activated-charcoal filter

The microfilter captures dust and pollen. The activated-charcoal filter provides additional protection by filtering gaseous pollutants from the

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

outside air. Your MINI dealer replaces this combined filter as a standard part of your scheduled maintenance.
You can call up further information in the service requirements display, page 64.

VENTILATION

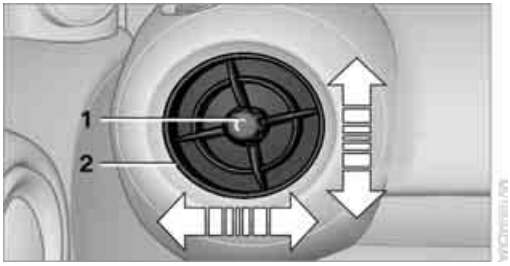

1 Knob for continuous opening and closing

2 Jet for direction of air flow

Opening/closing

Turn the knob.

Direction of air flow

Swivel the entire jet.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

PRACTICAL INTERIOR ACCESSORIES

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

INTEGRATED UNIVERSAL REMOTE CONTROL

The concept

By using the Integrated universal remote control, up to 3 functions of remote controlled devices, e.g., garage door openers or lighting systems, can be operated. As a result, the universal remote control can replace up to 3 different remote controls. To operate, the buttons on the rearview mirror must be programmed with the desired functions. For programming, the remote control for each device is needed.

To prevent possible damage or injury, before programming or using the integrated universal remote control, always inspect the immediate area to make certain that no people, animals or objects are within the travel range of the device.
Comply also with the safety instructions supplied with the original hand-held transmitter.◀

Before selling the vehicle, delete the stored functions as a safety precaution, page.

Checking compatibility

Depending on your vehicle's equipment, the glove compartment can be ventilated and, if the cooling function is switched on, can also be cooled.

For additional information, please contact your MINI dealer or call: 1-800-355-3515.

A list of compatible remote controls is available on the Internet at www.homelink.com.

HomeLink is a registered trademark of Johnson Controls, Inc.

Operating elements on the rearview mirror

1 LED

2 Memory buttons

3 Hand-held transmitter

Programming

General information

1. Switch on ignition.
2. Initial startup:

   Press and hold the right and left buttons on the rearview mirror for approx. 20 seconds until the LED on the rearview mirror starts flashing quickly. All the programming for the buttons on the rearview mirror is deleted.
3. Hold the original hand-held transmitter at a distance of approx. 1 in/2.5 cm to 3 in/8 cm from the buttons on the rearview mirror. The required distance depends on the hand-held transmitter.
4. Press both the desired function on the remote and the button to be programmed on the rearview mirror at the same time. The LED flashes slowly at first.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

5. As soon as the LED flashes rapidly, release both buttons. The quick flashing indicates that the button on the rearview mirror has been programmed.

   If the LED does not flash rapidly after approx. 60 seconds, alter the distance between the rearview mirror and hand-held transmitter and repeat this step. Several attempts at different distances may be necessary. Wait at least 15 seconds before each attempt.

   Canada: if the programming was interrupted by the hand-held transmitter, press and hold the memory button and press the button on the hand-held transmitter for 2 seconds and release several times.

6. To program other functions on other buttons, repeat steps 3 to 5.

You can operate the system with the engine running or with the ignition switched on.

Special features of hopping-code transmitter systems

If the device cannot be operated after being programmed repeatedly, then check if the device to be operated is equipped with a hopping-code system. In addition, check in the operating instructions for the device or press the programmed button on the rearview mirror for a longer period of time. If the LED on the rearview mirror first flashes quickly and then is on for 2 seconds, then the device is equipped with a hopping-code system. The flashing and the LED being on repeats itself for approx. 20 seconds.

In addition, for devices with hopping-code systems, the integrated universal remote control and the device must be synchronized.

Information about synchronizing can be found in the operating instructions for the device to be set.

Programming will be easier with the aid of a second person.

Synchronizing:

1. Park your vehicle within the range of the remote-controlled device.

   Do not exceed the 164 ft/50 m range of the remote-controlled device.

2. Program the particular button on the rearview mirrors as described.
3. Find and press the button for synchronizing the device to be set. There remain approx. 30 seconds for the next step.
4. Press and hold the programmed button on the rearview mirror for approx. **3** seconds and then release. Repeat this step, possibly up to three times, to complete the synchronization. After the synchronization is completed, the programmed function is implemented.

To reprogram individual buttons

1. Switch on ignition.
2. Press and hold the button to be programmed on the rearview mirror.
3. As soon as the LED on the rearview mirror starts flashing slowly, hold the hand-held transmitter of the device to be operated approx. 1 in/2.5 cm to 3 in/8 cm from the buttons on the rearview mirror. The required distance depends on the hand-held transmitter.
4. Press and also hold the button with the desired function on the hand-held transmitter.
5. As soon as the LED on the rearview mirror starts blinking faster, release both buttons. The quick flashing indicates that the button on the rearview mirror has been programmed. The device can now be operated using the button on the rearview mirror.

   Canada: if the LED is not flashing rapidly after 60 seconds, change the distance and repeat the step or, if the programming was interrupted by the hand-held transmitter, press and hold the memory button and

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

press the button on the hand-held transmitter for 2 seconds and release several times.

Operation

Before using the integrated universal remote control, always inspect the immediate area to make certain that no people, animals or objects are within the travel range of the device.
Comply also with the safety instructions supplied with the original hand-held transmitter.◀

The device, for example a garage door, can be operated while the engine is running or when the ignition is on by using the button on the rearview mirror. In addition, while within the reception range of the device, press the button until the function is deleted. The LED on the rearview mirror is constantly on while the signal is being transmitted.

Deleting stored functions

Press and hold the right and left buttons on the rearview mirror for approx. 20 seconds until the LED on the rearview mirror starts flashing quickly. All stored functions are deleted. The functions can not be deleted individually.

DIGITAL COMPASS

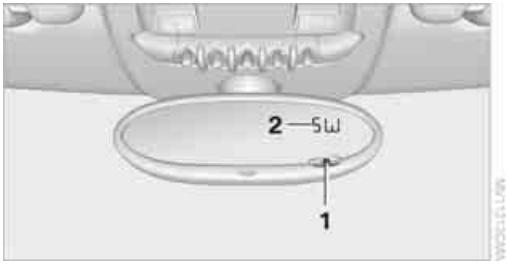

1 Setting button on the back of the mirror

2 Display

The cardinal or ordinal direction in which the vehicle is moving is shown on the display.

Operating principle

By pressing the setting button with a thin, sharp object, e.g., a pen or a similar object, various functions can be called up. The following setting options are displayed one after the other, depending on how long the setting button is pressed down:

- Quick press: display switches on/off
- 3 to 6 seconds: compass zone setting
- 6 to 9 seconds: compass calibration
- 9 to 12 seconds: left/right-hand drive setting
- 12 to 15 seconds: setting the language

Setting the compass zones

Set the appropriate compass zone on your vehicle so that the compass operates properly; see world map with compass zones.

To set the compass zones, press the setting button for approx. 3-4 seconds. The number of the compass zones that have been set are shown on the display.

To change the zone setting, quickly press the setting button as often as necessary until the number of the compass zone for your location is displayed.

The compass is again ready to use after approx. 10 seconds.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

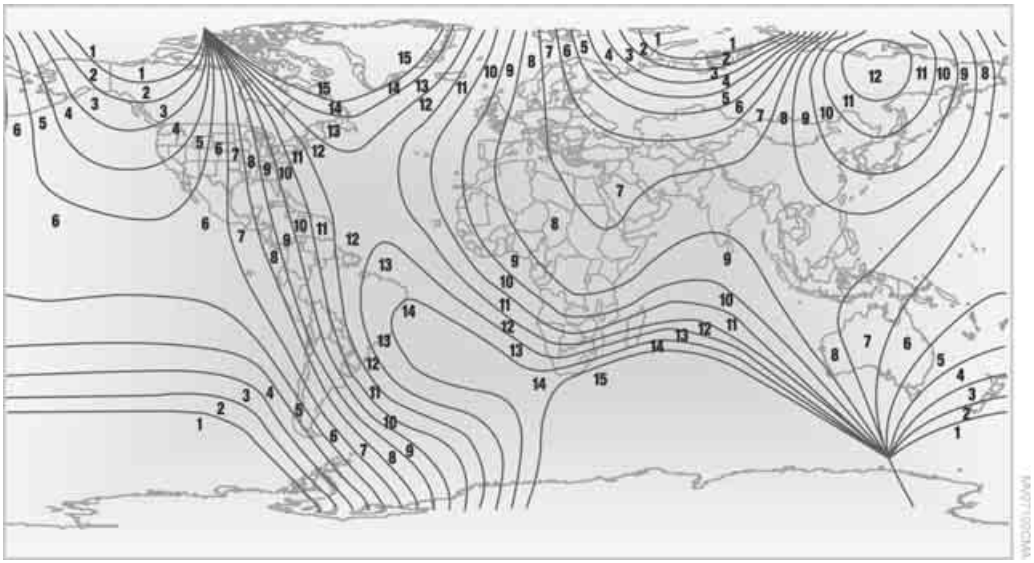

Calibrating the digital compass

The digital compass must be calibrated in the following situations:

- The incorrect cardinal direction is displayed.
- The direction that is displayed does not change even though the driving direction changes.
- Not all cardinal directions are displayed.

Procedure

1. Make sure that there are no large metal objects or overhead power lines near your vehicle, and that you have enough space to drive in circles.
2. Set the compass zone that currently applies.
3. Press the setting button approx. 6-7 seconds to call up C. Then drive in a complete circle at a maximum speed of 4 mph/7 km/h.
   If the calibration is successful, the C will be replaced by the directions.

Setting right/left-hand drive

Your digital compass is already set to right-hand drive or left-hand drive at the factory, depending upon your vehicle.

Setting the language

You can set the language on the display:

Press the setting button for approx. 12-13 seconds. Briefly press the setting button again to switch between English "E" and German "O".

The setting is automatically stored after approx. 10 seconds.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

GLOVE COMPARTMENT

Opening

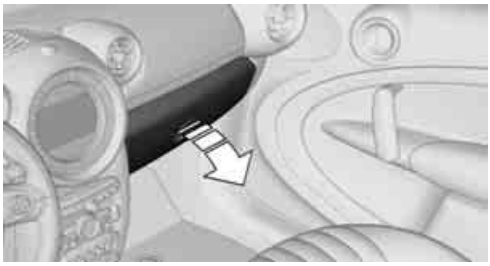

Pull the handle to open the cover.
The light in the glove compartment comes on.

Closing

Fold cover up.

To prevent injury in the event of an accident, close the glove compartment after use while the vehicle is being driven.◀

Ventilation

Depending on your vehicle's equipment, the glove compartment can be ventilated and, if the cooling function is switched on, can also be cooled.

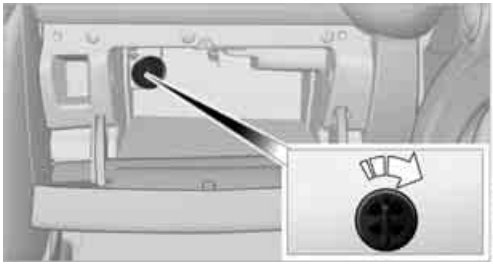

Opening

Rotate the switch in the direction of the arrow.

Closing

Rotate the switch in the opposite direction of the arrow until it is in the vertical position.

Depending on the temperature setting of the air conditioner or the automatic climate control, high temperatures may result in the glove compartment.

USB interface for data transfer

For the updating of navigation data, refer to page 118 on USB media via the USB interface in the glove box.

Observe the following when connecting:

- Do not forcibly connect the plug to the USB interface.
- Do not connect devices such as fans or lamps to the USB interface.
- Do not connect USB hard drives.
- Do not use the USB interface to recharge external devices.

CONNECTION FOR EXTERNAL AUDIO DEVICE

You can connect an external audio device such as a CD or MP3 player and play audio tracks over the vehicle's speaker system, refer to the Entertainment chapter starting on page 153.

CENTER ARMREST

The center armrest between the front seats contains either a compartment or the cover for the snap-in adapter, see page 174.

In the center armrest between the back seats, there is a storage compartment.

In addition, do not position high accessory parts directly on the center armrest on the rail; otherwise they could be damaged when the center armrest is opened or closed.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Center armrest front

Opening

Press the button, arrow, and lift the cover.

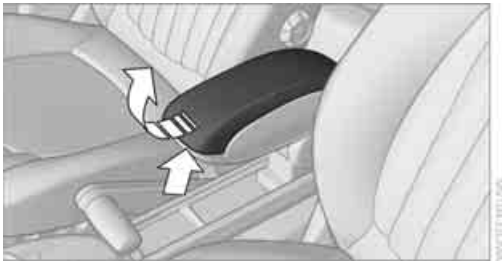

Center armrest rear

Removing

The center armrest in the rear can be removed to increase the amount of storage room.

1. Turn handwheel counterclockwise until it reaches the stop, arrow **1**.

2. Push center armrest in the base plate gently towards the back, arrow **2**.
3. Raise the armrest in front and swing out.

Installing

1. Insert center armrest in the back into the rear recess of the base plate, arrow **1**.

2. Push to rear and swing down in front, arrow **2**.
3. Push center armrest in the base plate forward.
4. Tighten handwheel by turning clockwise.

Ensure that the center armrest engages properly when it is installed; otherwise, it may be damaged, for example, during braking maneuvers.

STORAGE COMPARTMENTS

Do not put any unsecured objects into the interior of the vehicle; otherwise these may endanger the occupants, e.g., during braking and evasive maneuvers.◀

Do not use the instrument panel as a shelf, for example with non-slip mats; otherwise, it could be damaged.◀

In the vehicle interior

Depending on your vehicle's equipment, you will find storage compartments in the front and rear doors and in the center console.
Pockets are provided on the backrest rear panels of the front seats.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Center Rail

Various accessory parts can be attached to the Center Rail and installed in different positions.

Do not use accessory parts near the hand brake; otherwise these could be damaged when the hand brake lever is operated.◀

Smartphone holder

The upper part of the smartphone holder can be rotated by 360°.

When installing in the front of the rail, make sure that there is sufficient space, e.g., away from the seat; otherwise, damage may be caused when rotating.

1. Pull the lever **1** up to unlock the mounts.

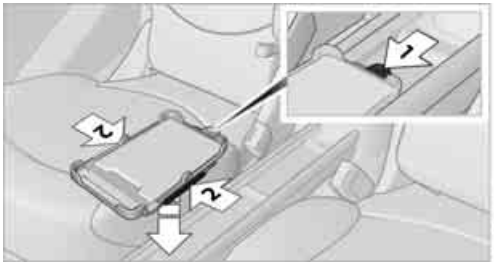

2. First install the smartphone on the Center Rail with the mounts **2**.
3. To secure, push lever **1** down. Ensure that the lever can lock it properly.

When connecting a smartphone to the USB audio interface, see page 154, guide the connection cable under the smartphone holder.

Base plate

On the base plate, various accessories can be attached, such as cup holders, holders for sunglasses and cell phone holders.

Inserting base plate

The lever **3** can be locked in three positions.

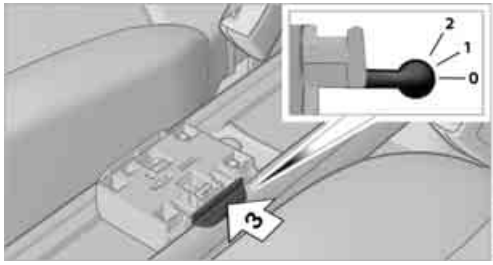

0 Locking

1 Sliding along the rail

2 Inserting base plate

For inserting, move the lever into position **2**.

Sliding and locking

1. Push lever **3** into position **1**.
2. Slide the base plate.
3. Push lever **3** down into position **0**.
   Make sure not to press the lever beyond the resistance point.

The base plate is fixed in position.

Lock the base plate in place before driving; otherwise, injuries may result in the event of an accident.◀

Example: cupholder

Put cupholder in the back between the rear seats and push in.

Installing cupholder

1. Lock base plate in place if necessary, refer to Sliding and locking.
2. Pull the lever **6** up to unlock the mounts.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

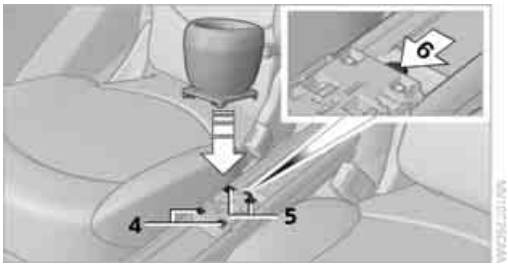

3. First insert the cupholder into the front mounts **4** and then snap it into the rear mounts **5**.

   Make sure that the lever **6** is situated opposite the mount **4**.◀

Clothes hooks

There are clothes hooks on the grab handles in the rear passenger compartment.

Items of clothing hung from the hooks must not obstruct the driver's view. Do not hang heavy objects from the hooks; otherwise, they could endanger the car's occupants, e.g. in case of heavy braking or sudden swerving.◀

In the cargo area

Depending on your vehicle's equipment, you have the following storage options:

- Storage compartment under the flat load floor
- Bag holder on the support for the cargo area cover

CUPHOLDERS AND ASHTRAY

Cupholders

Use lightweight, nonbreakable containers and do not transport hot beverages. Otherwise, there is an increased risk of injury in the event of an accident.◀

Do not push unsuitable containers forcibly into the cupholder. Otherwise, you may damage it.◀

Additional cupholders can be attached to the Center Rail in the rear passenger compartment.

Ashtray

The ashtray is located in one of the cupholders in the center console.

Emptying

Remove the entire ashtray.

Lighter

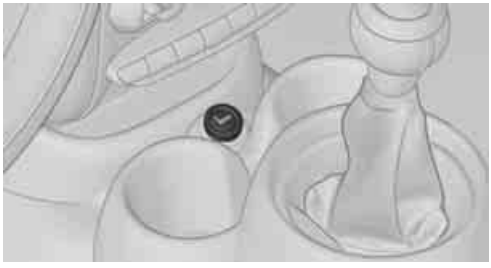

With the engine running or the ignition switched on, press in the cigarette lighter.

The lighter can be pulled out as soon as it pops back out.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Hold or touch the hot cigarette lighter by the knob only. Holding or touching it in other areas could result in burns.
When leaving the car, always remove the key so that children cannot operate the cigarette lighter and burn themselves.◀

CONNECTING ELECTRICAL APPLIANCES

In your MINI, when the engine is running or if the ignition is switched on, you can use electrical devices such as flashlights, car vacuum cleaners, etc., up to approx. 140 watts at 12 volts, as long as one of the following sockets is available. Avoid damaging the sockets by attempting to insert plugs of unsuitable shape or size.

Do not connect battery chargers to the sockets installed in the vehicle at the factory; otherwise you may cause damage to the vehicle.◀

Place the cigarette lighter or charger socket cover back in position after use; otherwise, items that fall into the cigarette lighter socket or charger socket can cause a short circuit.◀

Cigarette lighter socket

Remove the lighter or cover from the socket.

Sockets

In the rear passenger compartment

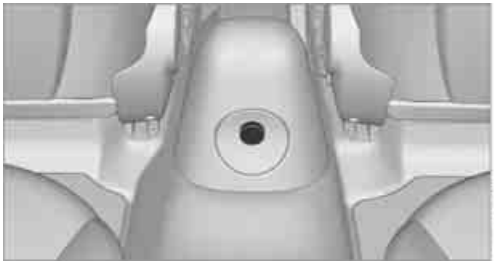

Pull out the cover.

In the cargo area

MINI Countryman:

Pull out the cover.

MINI Paceman:

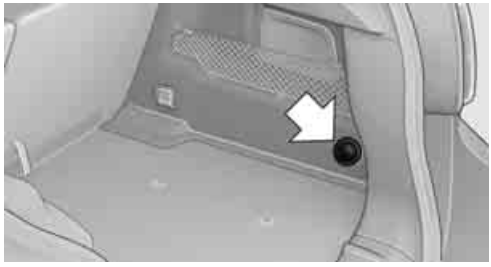

Pull out the cover.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

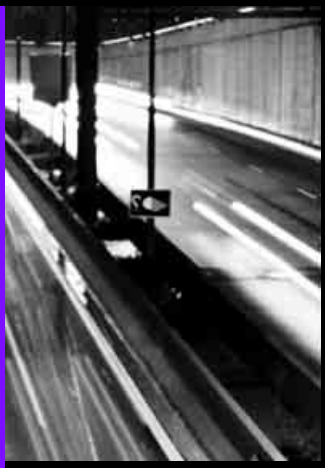

DRIVE ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

THINGS TO REMEMBER WHEN DRIVING

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

BREAK-IN PERIOD

Moving parts need breaking-in time to adjust to each other. Please follow the instructions below in order to achieve the optimal service life and economy of operation for your vehicle.

Engine and differential

Always obey all official speed limits.

Up to 1,200 miles/2,000 km

Drive at varying engine and road speeds, but do not exceed the following:

- Gasoline engine
  4,500 rpm or 100 mph/160 km/h

Avoid full-throttle operation and use of the transmission's kickdown mode.

After driving 1,200 miles/2,000 km

Engine and vehicle speeds can be gradually increased.

Tires

Due to technical factors associated with their manufacture, tires do not achieve their full traction potential until after an initial break-in period. Therefore, drive cautiously during the first 200 miles/300 km.

Brake system

Brakes require an initial break-in period of approx. 300 miles/500 km to achieve optimized contact and wear patterns between brake pads and rotors. Drive cautiously during this break-in period.

Clutch

The function of the clutch reaches its optimal level only after a distance driven of approx. 300 miles/500 km. During this break-in period, engage the clutch gently.

Following part replacement

The same break-in procedures should be observed if any of the components mentioned above have to be renewed in the course of the vehicle's operating life.

GENERAL DRIVING NOTES

Ground clearance

When driving, make sure that there is sufficient ground clearance, such as when entering underground parking garages, driving over curbs or when driving in winter; otherwise damage to the vehicle may result.◀

Closing tailgate

Only drive with the tailgate closed. Failure to do so may endanger passengers or other road users or may damage the vehicle in the event of an accident or a braking and evasive maneuver. In addition, exhaust gas may flow into the passenger compartment.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

If special circumstances make it absolutely necessary to drive with the tailgate open:

1. Close all windows and the glass sunroof.
2. Switch off recirculated-air mode and switch the airflow control of the air conditioner or automatic climate control to high, refer to page 88 or 90.

Hot exhaust system

As in all vehicles, extremely high temperatures are generated on the exhaust system. Do not remove the heat shields installed adjacent to various sections of the exhaust system, and never apply undercoating to them. When driving, standing at idle and while parking, take care to avoid possible contact between the hot exhaust system and any highly flammable materials such as hay, leaves, grass, etc. Such contact could lead to a fire, with the risk of serious personal injuries and property damage. Do not touch hot exhaust tail pipes. Otherwise, there is a risk of burns.◀

Hydroplaning

When driving on wet or slushy roads, reduce road speed. If you do not, a wedge of water can form between tires and road surface. This situation, known as hydroplaning, can cause partial or complete loss of tire contact with the road surface, so that the car cannot be steered or braked properly.◀

The risk of hydroplaning increases with declining tread depth on the tires, refer also to Tread depth on page 211.

Driving through water

Drive through water on the road only if it is not deeper than 1 ft/30 cm, and then only at walking speed at the most. Otherwise, the vehicle's engine, the electrical systems and the transmission may be damaged.◀

Parking brake on inclines

On inclines, do not hold the vehicle with the clutch; use the parking brake. Otherwise, greater clutch wear will result.◀

For information on driving off using Hill Assist, refer to page 74.

Braking safely

Your MINI is equipped with ABS. If you are in a situation which requires full braking, it is best to brake using maximum brake pressure. Since the vehicle maintains steering responsiveness, you can still avoid possible obstacles with a minimum of steering effort.

The pulsation of the brake pedal, together with the sound of hydraulic regulation, indicates that ABS is functioning properly.

Objects in the movement range of the pedals

Keep floor mats, carpet, and other objects out of the movement range of the pedals; otherwise, they may inhibit the function of the pedals during driving. Do not place additional floor mats onto an existing one or onto other objects. Only use floor mats that have been approved for the vehicle and can be appropriately fastened. Make sure that the floor mats are securely fastened again after they have been removed, e.g. for cleaning.◀

Driving in wet conditions

When roads are wet or there is heavy rain, briefly exert gentle pressure on the brake pedal every few miles. Monitor traffic conditions to ensure that this maneuver does not endanger other road users. The heat generated in this process helps dry the pads and rotors to ensure that. Then full braking force will be immediately available when it is needed.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Hills

To prevent overheating and the resulting reduced efficiency of the brake system, drive long or steep downhill gradients in the gear in which the least braking is required. Even light but consistent brake pressure can lead to high temperatures, brake wear and possibly even brake failure.◀

You can increase the engine's braking effect by shifting down, all the way to first gear if necessary. This strategy helps you avoid placing excessive loads on the brake system. Downshifting in manual mode of the automatic transmission, page 54.

Never drive with the clutch held down, with the transmission in neutral or with the engine switched off; otherwise, engine braking action will not be present or there will be no power assistance to the brakes or steering. Never allow floor mats, carpets or any other objects to protrude into the area around the pedals; otherwise, pedal function could be impaired.◀

Corrosion on brake rotors

When the vehicle is driven only occasionally, during extended periods when the vehicle is not used at all, and in operating conditions where brake applications are less frequent, there is an increased tendency for corrosion to form on rotors, while contaminants accumulate on the brake pads. This occurs because the minimum pressure which must be exerted by the pads during brake applications to clean the rotors is not reached.

Should corrosion form on the brake rotors, the brakes will tend to respond with a pulsating effect that even extended application will fail to cure.

When the vehicle is parked

Condensation forms while the automatic climate control is in operation, and then exits under the vehicle. Traces of condensed water under the vehicle are therefore normal.

In the MINI Cooper S, the coolant pump may continue to run for some time after the engine is switched off. This will generate noise in the engine compartment.

CARGO LOADING

To avoid loading the tires beyond their approved carrying capacity, never overload the vehicle. Overloading can lead to overheating and increases the rate at which damage develops inside the tires. The ultimate result can assume the form of a sudden blowout.◀

Avoid fluid spills in the cargo area as they could damage the vehicle.◀

EXPANDING CARGO AREA

Cargo area cover

Do not place any objects on the cover; otherwise, they could endanger the car's occupants, e.g. in the case of braking or sudden swerving, or they may damage the cover.◀

When you open the tailgate, the roll-up cover is raised.

To load bulky luggage, the cover can be removed.

1. Unhook the lift straps from the tailgate.
2. Lift the cover slightly, arrow **1**, and pull it rearward out of the bracket, arrow **2**.

MINI Countryman:

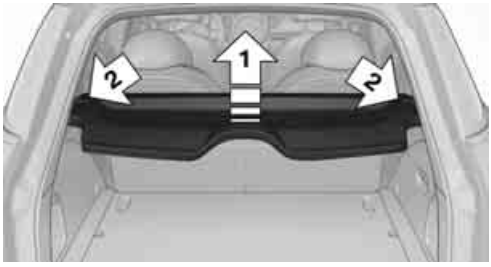

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Paceman:

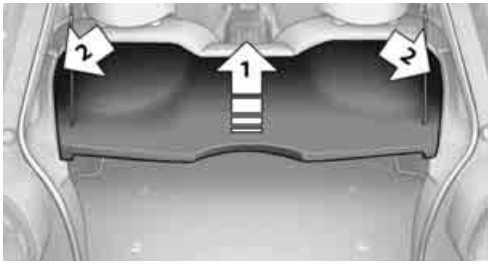

MINI Countryman: rear seat backrest

Before folding down the rear seat backrests, make sure that the range of motion for the backrests is unobstructed. Particularly with a folded down middle section, make sure that there is no one within the range of motion of the backrest and that no one reaches into that region. Otherwise, injury or damage can result.◀

To ensure that the safety systems continue to provide optimized protection, observe the safety belt information on page 42.◀

5-seater: the rear seat back is divided in the following proportions: 40-20-40.

When the outer rear seat backs are folded down, no one may sit in the middle position.◀

If necessary, remove the third head restraint, refer to Removing head restraints, page 41. Open the center belt and insert in the take-up on the headliner, see page 43.

Expand the cargo area by raising the rear seat backrests to a steeper angle.

The backrests can be adjusted as needed in 10 stages between a comfort position and a transport position or can be folded down.

In the comfort position, the backrests are as far back as possible; in the transport position, they are in an approximately vertical position.

Before installing a child restraint system, observe the instructions starting on page 46.

1. Hold on to the backrest near the top, for example on the headrest, and pull on the loop, arrow.
2. Lock backrest in the desired position or fold down.

Folding the backrests back into position

When folding the backrest, make sure that the lock properly engages. Otherwise, for example during braking and avoidance maneuvers, cargo can be thrown into the interior and endanger the occupants.◀

If the rear seat backrests are positioned at a steeper angle, do not install child restraint systems in the rear of the vehicle as their protective features may be ineffective.◀

When backrests are folded back from the folded-down position, they lock in the transport position.

To set the desired backrest angle or a comfortable position, pull the loop forward and adjust the backrest.

MINI Paceman: rear seat backrest

Before folding down the rear seat backrests, make sure that the range of motion for the backrests is unobstructed; otherwise, injury or damage can result.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

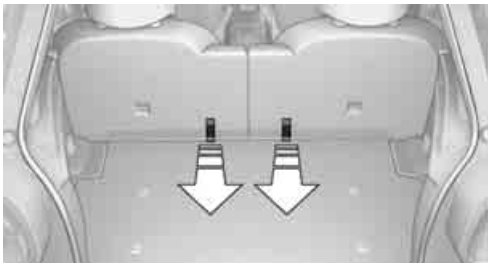

1. Pull on the loop, refer to arrow.
The backrest is unlocked.
2. Fold the backrest forward.

Folding the backrests back into position

Hold the backrest in the upper region, e.g. by the head restraint, and fold it back into position.

When folding the backrest, make sure that the lock properly engages. Otherwise, for example during braking and avoidance maneuvers, cargo can be thrown into the interior and endanger the occupants.◀

MINI Countryman: cargo area privacy screen

Between the cargo area and the rear seat backrest, there is a cargo area privacy screen. It can be folded down and used as a loading platform.

When the rear seat backrests are folded down, do not fold the privacy screen upright. In an accident, cargo could fold down the privacy screen and damage it.◀

Folding down the privacy screen

1. If necessary, remove the cargo area cover, refer to page 106.
2. Fold the privacy screen up and to the rear, arrow **1**.

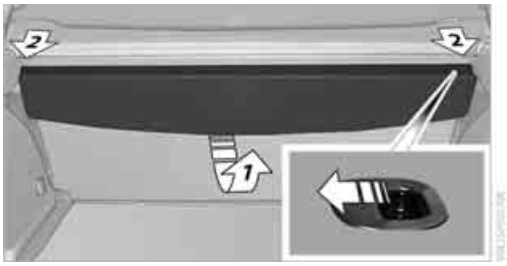

3. Release the locking mechanisms on the left and right sides, arrows **2**.
4. Grasp the outer sides of the privacy screen and guide it downward.

Do not exceed the maximum load of 330 lbs/150 kg of the privacy screen when it is in folded down into the loading platform position; otherwise, damage may occur.◀

Folding the privacy screen forward

1. Fold down rear seat backrests.
2. Unlock privacy screen, see above.
3. Grasp the outer sides of the privacy screen and guide it forward onto the folded-down rear seat backrests.

Removing

1. Removing cargo area cover, page 106.
2. Fold the privacy screen up and to the rear and unlock it, refer to Folding the privacy screen forward.
3. Remove it from the guides on the cargo area floor, arrows, and remove the privacy screen.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

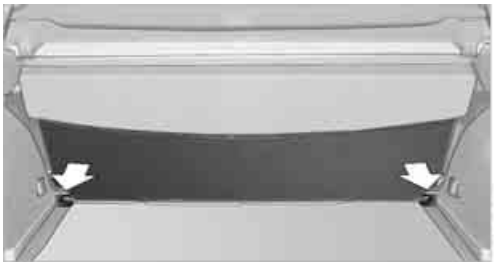

Flat load floor

Do not exceed a maximum load of 330 lbs/150 kg on the load floor; otherwise, damage may result.◀

Access to the storage space

Under the load floor, there is storage space, e.g., for the cargo net.

1. Reach into the recess, arrow **1**, at the back edge of the load floor.

   MINI Countryman:

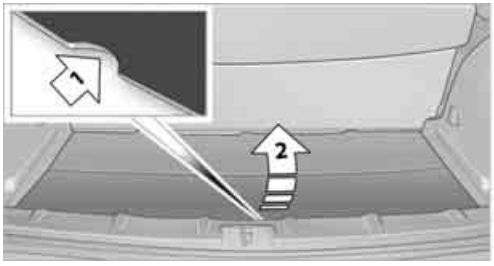

   MINI Paceman:

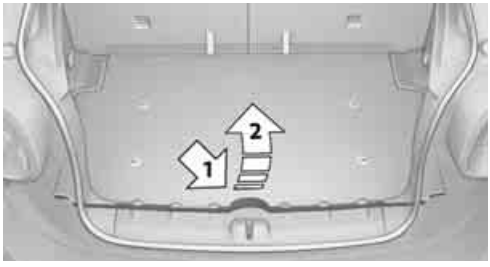

2. Lift up the pull-out floor panel at the rear, arrow **1** and fold it forward, arrow **2**.

Before closing the tailgate, put the load floor back on the cargo area floor.

Removing

If necessary, the load floor can be removed.

1. Fold load floor together.
2. Pull the load floor back slightly out of the take-up.
3. Then take it out toward the top.

The folded together load floor can be placed into the luggage compartment.

MINI Countryman: cargo net

Ensure that the cargo net is firmly attached; otherwise, injuries may occur.◀

Before installing

1. Remove the pouch with the cargo net from the storage compartment under the pull-out floor panel in the cargo area.
2. Remove the cargo net from the pouch, then unroll and unfold it.

   After use, fold the cargo net together, roll it back up in the same way, and place it in the pouch so that it can be stowed under the floor panel again. When doing so, make sure that hooks and tensioning buckles do not rest against the rod elements.
3. Unfold the cargo net until the rod elements snap into place.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Installing behind the front seats

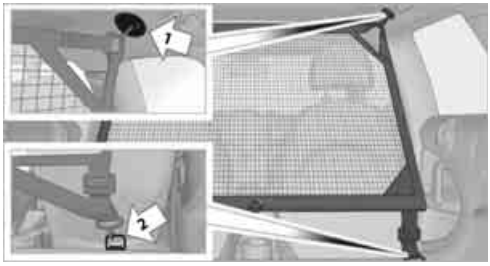

1. If necessary, remove the cargo area cover.
2. Fold down the rear seat backrests, refer to Expanding cargo area.
3. Insert each cargo net mounting pin all the way into its respective front mount in the headliner, arrow **1**, and push it forward.
4. Attach the hook, arrow **2**, at the bottom of each retaining strap to the respective eye on the vehicle floor.
5. Lash the cargo net securely. To do so, tighten the retaining straps at the tensioning buckles.

Removing

When removing and stowing the cargo net, proceed in the reverse sequence.

To fold closed, press the release button, arrow.

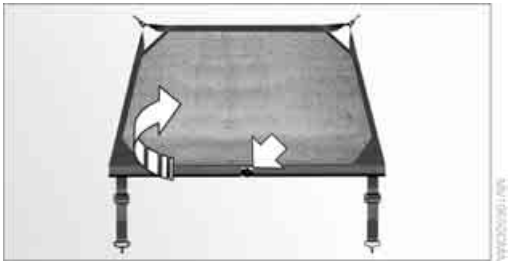

MINI Countryman: bag holders

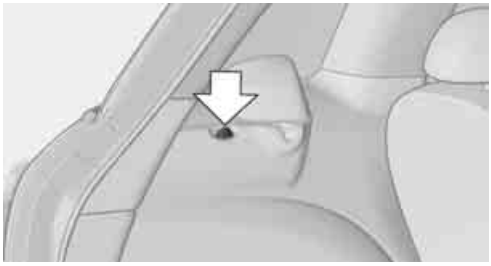

Holders on the left and right side of the support for the cargo area cover, arrow, e.g. for hanging shopping bags or storage bags.

Only hang light shopping bags or suitable items on the holders. Otherwise, this may create a hazard due to flying objects, for example in the event of braking and evasive maneuvers.

Transport heavy luggage only if it is appropriately secured in the cargo area.◀

Determining cargo limit

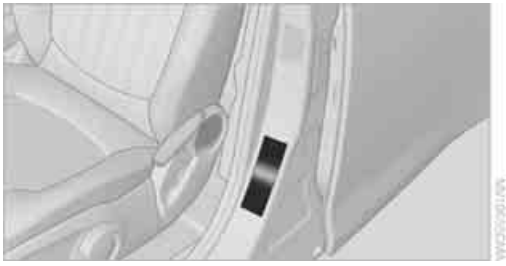

1. Locate the following statement on your vehicle's placard:

   The combined weight of occupants and cargo should never exceed XXX kg or YYY lbs. Otherwise, this could damage the vehicle and produce unstable vehicle operating conditions.◀
2. Determine the combined weight of the driver and passengers that will be riding in your vehicle.
3. Subtract the combined weight of the driver and passengers from XXX pounds or YYY kilograms.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. The resulting figure equals the available amount of cargo and luggage load capacity. For example, if the XXX amount equals 1,400 lbs and there will be four 150 lb- passengers in your vehicle, the amount of available cargo and luggage load capacity is 650 lbs:
1,400 lbs minus 750 lbs = 650 lbs.
5. Determine the combined weight of luggage and cargo being loaded on the vehicle. That weight may not safely exceed the available cargo and luggage load capacity calculated in step 4.
6. If your vehicle will be towing a trailer, part of the load from your trailer will be transferred to your vehicle. Consult the manual for transporting a trailer to determine how this may reduce the available cargo and luggage load capacity of your vehicle.

Load

4-seater:

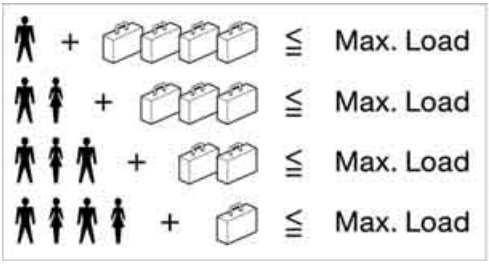

5-seater:

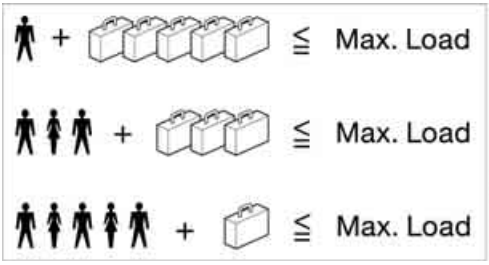

The permissible load is the sum of the occupants' weights and the weight of the cargo. The greater the weight of the occupants, the less cargo/luggage can be transported.

Stowing cargo

- Position heavy objects as low and as far forward as possible, ideally directly behind the rear seat backrests.
- Cover sharp edges and corners.
- For very heavy cargo when the rear seat is not occupied, secure each safety belt in the respective opposite buckle.
- Do not stack higher than the top edge of the backrests.
- Use the cargo net, refer to page 109. Ensure that no objects can penetrate through the net.

MINI Countryman:

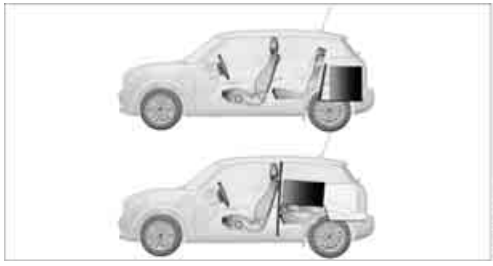

MINI Paceman:

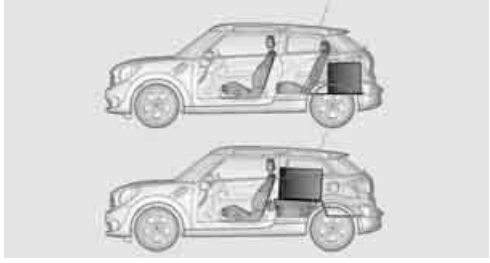

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Securing cargo

MINI Countryman:

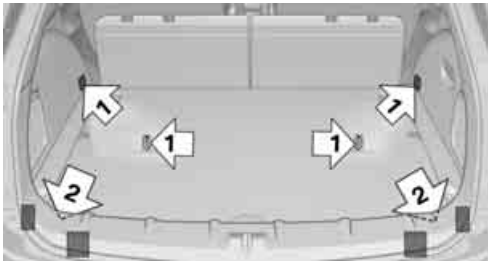

MINI Paceman:

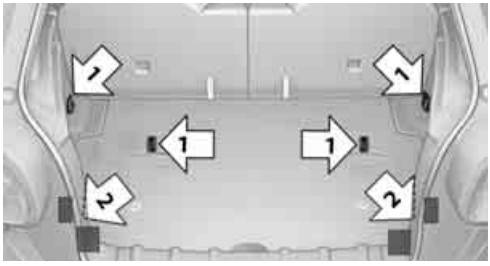

- Secure smaller and lighter items using retaining or draw straps.
- Heavy-duty cargo straps for securing larger and heavier objects are available at your MINI dealer.
- These cargo straps are fastened using eight securing eyes.

  Two of them are located on the side wall, arrows **1**, of the cargo area.

  Two of them are located on the rear wall, arrows **2**, of the cargo area.

To use the lower lashing eyes, raise or remove the pull-out floor panel.

Comply with the information enclosed with the load-securing devices.

Always position and secure the cargo as described above, so that it cannot endanger the car's occupants, for example if sudden braking or swerves are necessary.
Do not exceed the approved gross vehicle weight and axle loads, page 248; otherwise, the vehicle's operating safety is no longer assured and the vehicle will not be in compliance with the construction and use regulations.
Heavy or hard objects should not be carried loose inside the car, since they could be thrown around, for example as a result of heavy braking, sudden swerves, etc., and endanger the occupants. Do not secure cargo using the fastening points for the tether strap, page 47; they may become damaged.◀

ROOF-MOUNTED LUGGAGE RACK

A special rack system is available as an option for your MINI. Your MINI dealer will be glad to advise you. Comply with the installation instructions supplied with the rack system.

Loading roof-mounted luggage rack

Because roof racks raise the vehicle's center of gravity when loaded, they have a major effect on vehicle handling and steering response. You should therefore always remember not to exceed the approved roof load capacity, the approved gross vehicle weight or the axle loads when loading the rack.

You can find more information under Weights in the technical specifications.

The roof load must be distributed uniformly and should not be too large in area. Heavy items should always be placed at the bottom.

When loading, make sure that there is sufficient space for the movement of the glass roof.

Fasten roof-mounted cargo correctly and securely to prevent it from shifting or falling off during the trip.

Drive smoothly. Avoid sudden acceleration and braking maneuvers, and take corners gently.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

REAR LUGGAGE RACK

A special rear-mounted luggage rack is available as an optional accessory. It does not require a trailer hitch.

Please comply with the precautions included with the installation instructions.

Mounting points

MINI Countryman:

MINI Paceman:

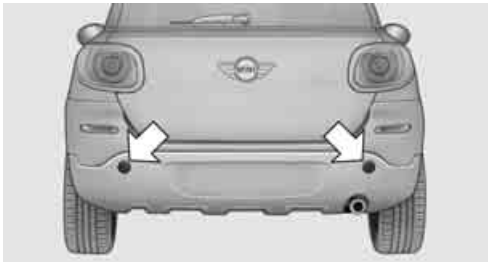

The mounting points are located under the covers in the bumper.
Remove the covers, refer to page 238.

Loading rear luggage rack

When loading, make sure that you do not exceed the approved gross vehicle weight and axle loads.

You can find more information under Weights in the technical specifications.

SAVING FUEL

General information

Your vehicle incorporates numerous technologies for reducing fuel consumption and emissions.

Fuel consumption depends on a number of different factors. Fuel consumption and environmental pollution are affected by various actions, the manner of driving and regular maintenance.

Remove unnecessary cargo

Additional weight increases fuel consumption.

Remove attached parts no longer in use

Attached parts on the vehicle affect its aerodynamics and increase fuel consumption.

Closing windows

Open windows increase air resistance and therefore fuel consumption.

Check tire inflation pressure regularly

Check and, if necessary, correct tire inflation pressure at least twice a month and before starting on a long trip.

Low inflation pressure increases rolling resistance and thus leads to greater fuel consumption and tire wear.

Drive off immediately

Do not wait for the engine to warm up while the vehicle remains stationary. Start driving right away, but at moderate engine speeds. This is the fastest way for the cold engine to reach its operating temperature.

Think ahead while driving

Avoid unnecessary acceleration and braking, by maintaining a suitable distance to the vehicle driving ahead.

Looking-ahead and smooth driving reduces fuel consumption.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Avoid high engine speeds

Use first gear only for driving off. In second and higher gears, accelerate smoothly to a suitable engine and road speed. In doing so, avoid high engine speeds and shift up early.

When you reach your desired traveling speed, shift to the highest suitable gear and drive at constant speed.

As a rule: driving at low engine speeds lowers fuel consumption and reduces wear.

Coasting

When approaching a red traffic light, take your foot off the accelerator and let the car roll to a stop in the highest gear possible.

On a downhill gradient, take your foot off the accelerator and let the vehicle coast in a suitable gear.

Fuel supply is shut off automatically when the vehicle is coasting.

Switch off the engine during lengthy stops

Switch off the engine when stopping for lengthy periods, e.g. at traffic lights, railroad crossings or in traffic jams.

Switch off any features that are not currently required

Features such as air conditioning, seat heaters and the rear window defroster require a great deal of energy and result in greater fuel consumption, especially in city driving and during Stop & Go operation. For this reason, switch off these features if they are not really needed.

Have the vehicle serviced

Have your vehicle serviced regularly to achieve good economy and a long vehicle life. The manufacturer of your MINI recommends having the vehicle serviced by a MINI dealer. Also note the MINI Maintenance System, page 218.

DRIVING ON POOR ROADS

Your MINI with ALL4 drive is at home on any type of street or road. It combines an all-wheel drive system with the advantages of a normal passenger car.

Do not drive on unpaved terrain, as otherwise the vehicle may be damaged.◀

When you are driving on poor roads, there are a few points which you should strictly observe for your own safety, for that of your passengers, and for the safety of the vehicle:

- Familiarize yourself with the vehicle before beginning to drive and do not take risks under any circumstances.
- Adapt your speed to road conditions. The steeper and rougher the road surface is, the lower the speed should be.
- When driving on very steep uphill or downhill grades, make sure in advance that the engine oil and coolant levels are close to the maximum mark, refer to page 215.
- While driving, watch carefully for obstacles such as rocks or holes. Try to avoid these obstacles whenever possible.
- Make sure that the undercarriage does not touch the ground, for example on hilltops and bumpy roads. The ground clearance of the vehicle is a maximum of approx. 6.0 in/15 cm. Please note that the ground clearance can vary depending on loading and the driving conditions of the vehicle.
- Only drive through road surface water up to a maximum water depth of 1 ft/30 cm and only at walking speed; do not remain stationary.
- After driving through water at low speed, lightly press the brake pedal several times to dry the brakes and to prevent the braking effect from being reduced by wetness.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

- Depending on the condition of the surface, it may be practical to briefly activate DTC, refer to DTC Dynamic Traction Control on page 73.
- If the drive wheels spin on one side, depress the accelerator pedal sufficiently so that the driving stability control systems can distribute the drive forces to the individual wheels.

After driving on poor roads, please observe the following points to maintain the driving safety of the vehicle:

- Clean the coarsest dirt from the body.
- Clean mud, snow, ice, etc. from the wheels and tires and check the tires for damage.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

FOLLOW ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

NAVIGATION SYSTEM

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

GENERAL INFORMATION

The navigation system can determine the precise position of the vehicle, with the aid of satellites and vehicle sensors, and can reliably guide you to every entered destination.

Enter data only with the vehicle stationary, and always give priority to the applicable traffic regulations in the event of any contradiction between traffic and road conditions and the instructions issued by the navigation system. Failure to take to this precaution can place you in violation of the law and put vehicle occupants and other road users in danger.◀

Selecting navigation

1. "Navigation"

During route guidance, an arrow view or a map view is displayed on the onboard computer.

NAVIGATION DATA

Information on navigation data

1. "Navigation"
2. Open "Options".
3. "Navigation system version"

Information about the data version is displayed.

Updating the navigation data

General information

Navigation data are stored in the vehicle and can be updated.

You may obtain current navigation data and the enabling code at your MINI dealer.

Updating the data can take several hours, depending on the volume of data.

- Update data while driving to reduce the drain on the battery.
- The update is resumed automatically when a trip is continued after an interruption.
- You can inquire as to the status of the update.
- The data are stored in the vehicle.
- After the updating process is complete, the system restarts.
- The medium with the navigation data can be removed after the update.

To update

1. Depending on equipment: insert USB storage device with navigation data
   - into the USB interface in the glove compartment
   - into the USB audio interface, refer to page 154.
2. Follow the instructions on the onboard computer.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

3. Enter the activation code of the USB storage device.
4. Begin driving.

The update begins after the activation code is entered. When the update is completed, the system restarts.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

DESTINATION ENTRY

GENERAL INFORMATION

In entering your destination you can select from among the following options:

- Manual destination entry, see below
- Selecting destination from address book, page 122
- Last destinations, page 123
- Special destinations, refer to page 124
- Entering the destination via map, refer to page 125
- Selecting home address, refer to page 123
- Entering destination via voice, page 126

After selecting your destination you can proceed to start the route guidance, page 129.

MANUAL DESTINATION ENTRY

To make it easier to enter town/city names and street names, you are supported with the word-match principle, refer to page 128. This makes it possible to enter different spellings and completes your entry automatically so that stored town/city names and street names can be accessed quickly.

1. "Navigation"
2. "Enter address"

The system also supports you with the following features:

- If you do not enter a street, the system will guide you to the downtown area of a town or city.
- You can skip the entry of country and town/city if the current entries should be retained for your new destination.

Entering a state/province

1. "Navigation"
2. "Enter address"
3. Select "State/Province" or displayed country.

Entering a town/city

1. Select "Town/City/Postal Code" or displayed city.

2. Select letters, if necessary.
   A list of all towns/cities starting with this letter appears on the Control Display.

   To delete letters:

   - To delete individual numbers or letters: Turn the MINI joystick to highlight ← and press the MINI joystick.
   - To delete all numbers or letters: Turn the MINI joystick to highlight ← and press and hold the MINI joystick.
3. If necessary, enter more letters.
   The list gradually grows smaller each time you enter a new letter.

   To enter spaces, if necessary:
   Select the ␣ symbol.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. If necessary, move the MINI joystick to the right and change to the list of towns and cities and select a name.

Entering the postal code

1. Select "Town/City/Postal Code" or displayed city.
2. Select the 1@+ symbol.
3. Select the digits individually.
4. Change to the list of postal codes and towns/cities.
5. Highlight the postal code.
6. Select the zip code.
The corresponding destination is displayed.

Entering street and intersection

1. Select "Street" or displayed street.
2. Enter the street and intersection the same way you entered the town/city.

If there are several streets with the same name:

1. Move the MINI joystick to the right to change to the list of street names.
2. Highlight street.
3. Select the street.

Alternative: entering street and house number

1. Select "Street" or displayed street.
2. Enter the street the same way you entered the town/city.
3. "House number"
4. Select the digits.
5. Change to the list of house numbers.
6. Select a house number or range of house numbers.

Entering a street without a destination town/city

It is also possible to enter a street without entering a destination town/city. In this case all streets of the entered country are offered for selection. The related town/city is displayed after the street name.

If a town/city has already been entered, this entry can be canceled. This may be practical if the desired street does not exist in the entered destination, because, for example, it belongs to another part of the town/city.

1. "Navigation"
2. "Enter address"
3. Select "Street" or displayed street.
4. Change to the list of street names.
5. Select "In" with the currently displayed country.

6. Select the letters.
7. Change to the list of street names.
8. Highlight street.
9. Select the street.

Starting route guidance after entering the destination

1. "Accept destination"
2. "Start guidance" or "Add as another destination".

▷ Setting "Route preference", refer to page 129.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

▷ Search for "Points of Interest at loc.", refer to page 124.

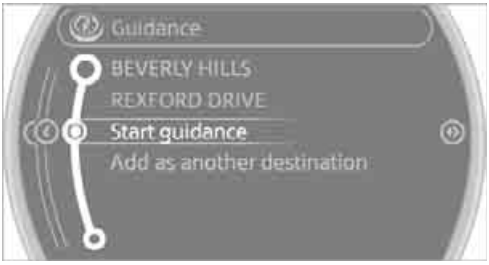

ADDRESS BOOK

To create contacts, refer to page 171 or page 188.

Selecting a destination from the address book

1. "Navigation"
2. "Address book"
   Contacts with addresses are displayed if these addresses have been checked as destinations.

   If the contacts with addresses from the mobile phone are not displayed, they must first be checked as destinations, refer to page 173 or page 189.

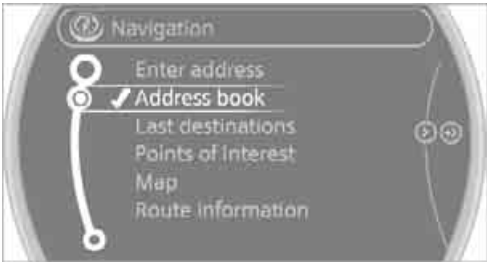

3. Select a contact in the list or if so desired, using the "A-Z search".
4. If necessary, select "Business address" or "Home address".

Storing a destination in the address book

Store the destination in the address book after entering the destination.

1. "Navigation"
2. "Map"
3. "Guidance"
4. Open "Options".
5. "Store as new contact" or "Add to existing contact".

6. Select an existing contact, if available.
7. Select "Business address" or "Home address".
8. Enter "Last name" and "First name" if you wish.
9. "Store in vehicle"

Storing the position

Your current position can be stored in the address book.

1. "Navigation"
2. Open "Options".
3. "Store position as contact" or "Add position to contact".

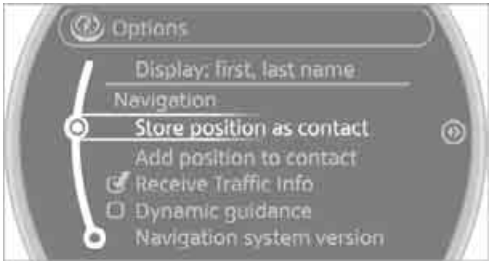

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. Depending on the selection, select an existing contact from the list or the type of address and enter the last and first name.
5. "Store in vehicle"

Editing or deleting an address

1. "Navigation"
2. "Address book"
3. Highlight the entry.
4. Open "Options".
5. "Edit in Contacts" or "Delete entry".

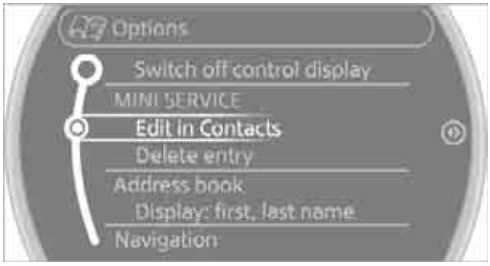

Using home address as destination

The home address must be stored as a destination. Refer to Defining a home address, page 172 or page 189.

1. "Navigation"
2. "Address book"
3. "Home"

4. "Start guidance"

LAST DESTINATIONS

The last destinations are stored automatically. These destinations can be called up and used as a destination for route guidance.

Accessing last destinations

1. "Navigation"
2. "Last destinations"

3. Select the destination.
4. "Start guidance"

Editing a destination

Destinations can be edited, for example, to change the house number of an existing entry.

1. "Navigation"
2. "Last destinations"
3. Highlight the destination.
4. Open "Options".
5. "Edit destination"

Deleting the last destinations

1. "Navigation"
2. "Last destinations"
3. Highlight the destination.
4. Open "Options".
5. "Delete entry" or "Delete all last destinations".

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

SPECIAL DESTINATIONS

You can search for a special destination, e.g. a hotel or place of interest, and start route guidance to the corresponding location.

The scope of information provided depends on the particular set of navigation data you are using.◀

Accessing search for special destinations

1. "Navigation"
2. Select "Points of Interest" search.

A-Z search

1. "A-Z search"
2. "Town/City"
3. "Category"
4. "Category details"

   For some special destinations, it is possible to select several category details. Move the MINI joystick to the left to exit category details.
5. "Keyword"
6. Enter keyword.

   A list of the special destinations is displayed.
7. Select the special destination.
8. Select the symbol.
9. "Start guidance" or "Add as another destination".

   If several details are stored, then you can scroll through the pages.

   If a phone number is available, a connection can be established, if desired.

Category search

1. "Category search"
2. "Search destination"
3. Select or enter town/city.
4. "Category"
5. Select category.
6. "Category details"

   For some special destinations, it is possible to select several category details. Move the MINI joystick to the left to exit category details.
7. "Start search"
   A list of the special destinations is displayed.
8. Select the special destination.
   Details are displayed.
9. Select the symbol.
10. "Start guidance" or "Add as another destination".

If several details are stored, then you can scroll through the pages. If a phone number is available, a connection can be established, if desired.

Special destination location

As you input the search destination, you can select from among various options.

- "At current location"
- "At destination"
- "At different location"
- With active route guidance: "Along route"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Starting the search for special destinations

1. "Start search"
2. A list of the special destinations is displayed.
   - ▷ "At current location"
     The special destinations are displayed in order of their distance and are displayed with a direction arrow pointing toward the destination.
   - ▷ "At destination", "At different location", "Along route"
     The special destinations are displayed in order of their distance from the search point.
   - ▷ Destinations of the selected category are displayed in the map display as symbols. The display depends on the map scale and the category.
3. Highlight special destination.
4. Select the special destination.
5. Select the symbol.
6. "Start guidance" or "Add as another destination".

The distance from the destination is displayed.

Displaying special destinations in the map

To display symbols of the special destinations in the map:

1. "Navigation"
2. "Map"
3. Open "Options".
4. "Display Points of Interest"

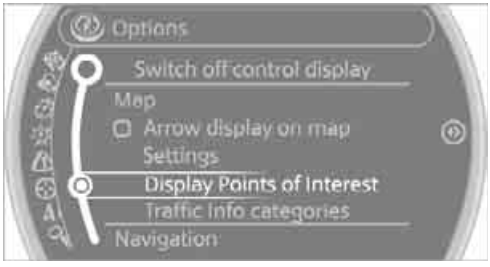

5. Select the settings.

ENTERING THE DESTINATION VIA MAP

If you only know the location of a destination or street, then you can enter the destination with the aid of the map.

Selecting the destination

1. "Navigation"
2. "Map"

   The map shows the current position of the vehicle.
3. "Interactive map"

4. Select the destination with the cross-hairs.
   - ▷ Changing scale: turn the MINI joystick.
   - ▷ Moving map: move the MINI joystick in the corresponding direction.
   - ▷ Shifting map diagonally: move the MINI joystick in the corresponding direction and turn the MINI joystick.
5. Press the MINI joystick to display additional menu items.
   - ▷ Select the symbol: "Start guidance" or "Add as another destination".
   - ▷ "Find points of interest": the search for special destinations is started.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Specifying the street

If the system does not detect any street, then a street name in the vicinity or the coordinates of the destination are displayed.

Additional functions

In the interactive map, the scale can be adjusted and the visible map section can be shifted. You can also access other functions by pressing the MINI joystick:

- Select the symbol and "Start guidance" if necessary.
- "Exit interactive map"
- Map display
- "Display destination"
  The section of the map around the destination is displayed.
- "Display current location"
  The section of the map around the current position is displayed.
- "Find points of interest", refer to page 124.

ENTERING DESTINATION VIA VOICE

General information

- Voice activation system, refer to page 21.
- When entering a destination by voice, it is possible to switch between voice input and the onboard computer.
- Having the possible spoken commands read aloud: ›Voice commands‹

Saying the entries

- Countries, towns/cities, streets, and intersections can be either spoken aloud as an entire words or spelled in the system language, refer to page 69.

  Example: to enter a destination in a US state as a complete word, the system language must be English.
- Spell the entry if the language of the area is different from the system language.
- Speak the letters smoothly and avoid excessive emphasis and pauses.

Entering a town/city

The town/city can be spelled or entered as an entire word.

The methods of entry depend on the navigation data in use and the country and language settings.◀

1. ›City‹ or ›Spell city‹.
2. Wait for the system prompt for the town/city.
3. Say the name of the town/city or if necessary, spell at least the first three letters.
4. Select city/town:
   - To select a recommended town/city: ›Yes‹
   - Select other city/town: ›New entry‹
   - To select an entry, e.g. ›Entry …‹
   - Spell the entry: ›Spell city‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Similar-sounding towns/cities that cannot be differentiated by the system are compiled in a separate list and displayed as a town/city followed by three dots.
If necessary, select this entry with ›Yes‹. Then select the desired city/town in this list.◀

The town/city can also be selected from the list via the onboard computer:
Turn the MINI joystick until the destination is selected, and press the MINI joystick.

Entering a street or intersection

The street or intersection is entered in the same way as the town/city.

Entering house number

Depending on the data in the navigation system, house numbers up to the number 2,000 can be entered:

1. ›House number‹
2. Say the house number.
3. ›Yes‹ to confirm the house number.
4. ›Accept destination‹

Starting route guidance

›Start guidance‹

Route guidance starts immediately.

Adding further intermediate destinations

›Add as another destination‹

Further intermediate destinations can be added.

Saving destination

The destination is automatically added to the list of the last destinations.

PLANNING A TRIP WITH INTERMEDIATE DESTINATIONS

New trip

Various intermediate destinations can be entered for a trip. The trip destination must be entered first, refer to Destination input, page 120.

Entering intermediate destinations

A maximum of 30 intermediate destinations can be entered for one trip.

1. "Navigation"
2. Select the type of destination entry and enter the intermediate destination.

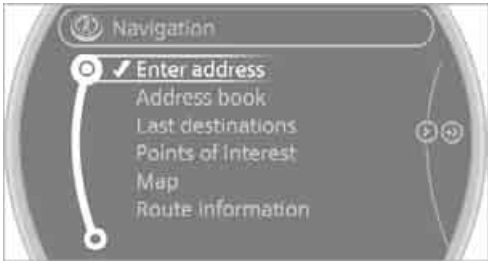

3. "Add as another destination"

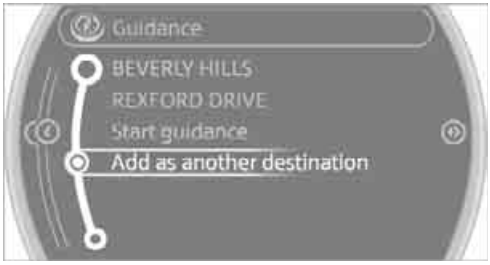

4. Select the location where the intermediate destination is to be inserted.

Starting the trip

After entering all intermediate destinations:
"Start guidance"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

WORD-MATCHING PRINCIPLE

The system's word-matching principle makes it easier to enter the names of towns or streets. The system runs ongoing checks, comparing your destination entries with the data stored in the vehicle as the basis for instant response. The user benefits include:

- Town/city names can also be entered differently from the official names if you use a form that is customary in other countries.

  Example:

  Instead of "München", you can also enter the English spelling "Munich" or the Italian spelling "Monaco".
- When you are entering the names of towns/cities and streets the system will complete them automatically as soon as enough letters are available to ensure unambiguous identification.
- The system offers only those letters for selection of name entries that are stored in the vehicle. The system will not accept non existent names and addresses.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

ROUTE GUIDANCE

STARTING ROUTE GUIDANCE

1. "Navigation"
2. "Enter address"
3. Select the destination.
4. "Accept destination"
5. "Start guidance"

▷ The route is displayed on the onboard computer.

▷ The distance to the destination/intermediate destination and the estimated time of arrival are displayed in the map view.

▷ The arrow display is displayed on the onboard computer, if so desired.

TERMINATING ROUTE GUIDANCE

In the arrow or map view

1. "Navigation"
2. "Map"
3. Select the symbol.
4. "Stop guidance"

CONTINUING ROUTE GUIDANCE

If the destination was not reached during the last trip, route guidance can be resumed.

"Resume guidance"

ROUTE CRITERIA

General information

▷ You can influence the calculated route by selecting certain criteria.

▷ Route criteria can be changed during destination input and during route guidance.

▷ Street types are part of the navigation data and are taken into account in route planning, e.g. avoiding highways.

▷ The proposed route can differ from personal experience.

▷ The settings are stored for the remote control currently in use.

▷ Route guidance with traffic information, refer to page 135.

Changing route criteria

1. "Navigation"
2. "Map"
3. "Route preference"
4. Selecting a criterion:
   - ▷ "Fast route": time-optimized route through a combination of the least possible distance and stretches of road that allow rapid driving.
   - ▷ "Efficient route": optimized combination of the fastest and shortest possible route.
   - ▷ "Short route": short distance without taking time into account.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

- "Alternative routes": suggestions of additional alternate routes during route guidance.

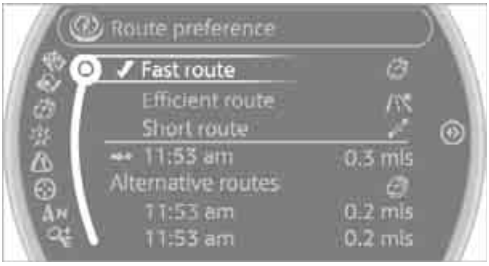

5. Select additional route criteria, if desired. Where possible, the selected criteria will be avoided on the route.
   - "Avoid highways": avoid highways where possible.
   - "Avoid toll roads": avoid toll roads where possible.
   - "Avoid ferries": avoid ferries where possible.

The setting applies to the current route and to the planning of future routes.

If the route criteria "Avoid highways", "Avoid toll roads", or "Avoid ferries" are selected, then this can prolong the calculation time for the route.◀

ROUTE

There are various views of the route available during route guidance:

- Arrow display
- List of streets and towns/cities
- Map view, refer to page 131

Arrow display

The following information is displayed during route guidance:

- Large arrow: current direction of travel.
- Street name of the currently traveled street.
- Small arrow: indicates the next change of direction.
- Intersection view.
- Lane information.
- Traffic information.
- Distance to the next change of direction.
- Street name of the next change of direction.

Lane information

In the arrow display, the recommended lanes of multi-lane roads are each marked with a triangle.

- Filled triangle: optimum lane.
- Empty triangle: likewise possible lane. It can, however, also be possible to briefly make additional lane changes.

List of roads or towns/cities on the route

If the route guidance has been started, then you can display a list of the roads and towns/cities on the route. The distance to be traveled and traffic bulletins are displayed for each segment of the route.

1. "Navigation"
2. "Route information"

3. Highlight a section.

Taking detours

During route guidance, prompt the navigation system to bypass certain route segments. In doing so, you will specify how many kilometers to travel before returning to the original route.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

1. "Navigation"
2. "Route information"
3. "New route for:"

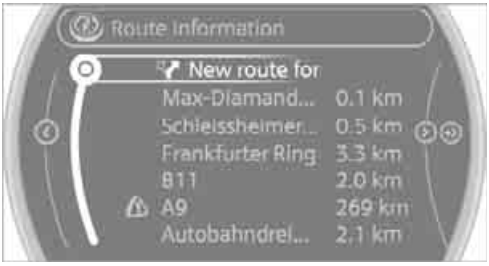

4. Turn the MINI joystick: enter the desired mileage.
5. Press the MINI joystick.

Resuming the original route

If the route section should no longer be bypassed:

1. "Navigation"
2. "Route information"
3. "New route for:"
4. "Remove blocking"

Recommended refueling

The remaining driving range is calculated, and gas stations along the route are shown.

Even with the latest navigation data, information on various points of interest may have changed, e.g., service stations may not be in operation.

1. "Navigation"
2. "Route information"
3. "Recommended refuel"
   A list of gas stations is displayed.
4. Select a gas station.
5. Select the symbol.
6. "Start guidance": the guidance to the selected gas station is started.

   "Add as another destination": the gas station is included in the route.

MAP DISPLAY

Displaying map view

1. "Navigation"
2. "Map"

Overview

1 Toolbar
2 Route segment with traffic obstruction
3 Road sign for traffic obstruction
4 Planned route
5 Current location
6 Upper status box
7 Lower status box

Lines on the map

In the map view, streets and roads are depicted with different colors and lines according to their classification. Dotted lines represent railroad and ferry connections. National borders are depicted with thin lines.

Traffic obstructions

Small triangles along the planned route identify route segments with traffic obstructions, depending on map scale. The direction of the triangles indicates the direction of the obstruction.

Road signs classify the obstructions.

- Red road sign: the obstruction relates to the planned route or direction of travel.
- Gray road sign: the obstruction does not relate to the planned route or direction of travel.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Traffic information, refer to page 133.

Planned route

After route guidance is started, the planned route is displayed on the map.

Status boxes

Show/hide: press the MINI joystick.

- Upper status box: time, phone details, and entertainment details.
- Lower status box: symbol for active route guidance, traffic information status, arrival time, and distance from destination.

Toolbar

The following functions are available directly in the map view:

Symbol	Function
	Starting/stopping route guidance
	Switching voice instructions on/off
	Changing route criteria or selecting route alternatives
	Searching for special destination
	Displaying traffic bulletins
	Interactive map
	Adjusting map views or arrow display
	Changing scale

Changing map scale

"Interactive map"

- Moving map: move the MINI joystick in the corresponding direction.
- Shifting map diagonally: move the MINI joystick in the corresponding direction and turn the MINI joystick.

Changing scale

1. Select the symbol and press the MINI joystick.
2. Changing scale: turn the MINI joystick.

Automatic scaling of the map

In the map view facing north, turn the MINI joystick in either direction until the scale AUTO is displayed. The map shows the entire path between the location and destination.

Settings for the map display

The settings are stored for the remote control currently in use.

1. Open "Options".
2. "Settings"
   - "Day/night mode"
     Select and adjust depending on light conditions. If "Traffic conditions/gray map" is activated, then this setting is not taken into account.
   - "Traffic conditions/gray map"
     The map is optimized for displaying traffic bulletins. Symbols for the special destinations are no longer displayed.

Displaying arrow view in map display

When route guidance is active, the arrow view can be displayed additionally on the right side of the map display.

1. "Navigation"
2. Open "Options".

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

3. "Arrow display on map"

DESTINATION GUIDANCE VIA VOICE INSTRUCTIONS

Switching voice instructions on/off

The voice instructions can be switched on and off during route guidance.

1. "Navigation"
2. "Map"
3. Select the symbol.

Symbol	Meaning
	Voice instructions switched on
	Voice instructions switched off

Repeating a voice instruction

1. "Navigation"
2. "Map"
3. Highlight the symbol.
4. Press the MINI joystick twice.

Adjusting volume for voice instructions

The volume can be adjusted only while a voice instruction is being issued.

1. Repeat the last voice instruction, if necessary.
2. Turn the knob during the voice instruction to select the desired volume.

This volume is independent of the volume of the audio sources.

The setting is stored for the remote control currently in use.

TRAFFIC INFORMATION

Overview

In many congested areas, you can receive traffic information that is transmitted by radio stations. The traffic conditions are monitored by traffic control centers and the traffic information is updated periodically.

During route guidance, the traffic information relevant to the route you are planning to take is automatically shown and taken into account in route planning. Irrespective of whether route guidance is active, you can have the traffic information displayed in the map display or as an event list.

The symbol in the toolbar of the map view turns red if traffic information relates to the calculated route.

Real Time Traffic Information End-User Provisions

Certain MINI models equipped with navigation have the capability to display real-time traffic information. If your system has this capability the following additional terms and conditions apply:

An End-User shall no longer have the right to use the Traffic Data in the event that the End-User is in material breach of the terms and conditions contained herein.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

A. Total Traffic Network, a division of Clear Channel Broadcasting, Inc. ("Total Traffic Network") holds the rights to the traffic incident data and RDS-TMC network through which it is delivered. You may not modify, copy, scan or use any other method to reproduce, duplicate, republish, transmit or distribute in any way any portion of traffic incident data. You agree to indemnify, defend and hold harmless MINI of North America, LLC. ("MINI NA") and Total Traffic Network, Inrix, Inc (and their affiliates) against any and all claims, damages, costs or other expenses that arise directly or indirectly out of (a) your unauthorized use of the traffic incident data or the RDS-TMC network, (b) your violation of this directive and/or (c) any unauthorized or unlawful activities by you in connection herewith.

B. Total Traffic Network traffic data is informational only. User assumes all risk of use. Total Traffic Network, MINI NA, and their suppliers make no representations about content, traffic and road conditions, route usability, or speed.

C. The licensed material is provided to license "as is," and "where is". Total Traffic Network, including, but not limited to, any and all third party providers of any of the licensed material, expressly disclaims, to the fullest extent permitted by law, all warranties or representations with respect to the licensed material (including, without limitation, that the licensed material will be error-free, will operate without interruption or that the traffic data will be accurate), express, implied or statutory, including, without limitation, the implied warranties of merchantability, non-infringement fitness for a particular purpose, or those arising from a course of dealing or usage of trade.

D. Neither Total Traffic Network, Inrix, Inc. nor MINI NA will be liable to you for any indirect, special, consequential, exemplary, or incidental damages (including, without limitation, lost revenues, anticipated revenues, or profits relating to the same) arising from any claim relating directly or indirectly to use of the traffic data, and even if Total Traffic Network, Inrix, Inc., or MINI NA are aware of the possibility of such damages. These limitations apply to all claims, including, without limitation, claims in contract and tort (such as negligence, product liability and strict liability). Some states do not allow the exclusion or limitation of incidental or consequential damages, so those particular limitations may not apply to you.

Switching reception of traffic information on/off

1. "Navigation"
2. Open "Options".
3. Activate/deactivate "Receive Traffic Info".

Accessing traffic information

1. "Navigation"
2. "Map"

   "Traffic Info": traffic information for the surrounding area is listed here. The symbol turns red when traffic information relate to the calculated route.
3. "Traffic Info"
   First, traffic bulletins relating to the planned route are displayed.
   The traffic bulletins are sorted in the order of their distance from the current vehicle position.
4. Select traffic information.
   "More information": display additional information.
5. Scroll to the next or previous traffic information if desired.

Traffic bulletins in the map

When the traffic info map is activated, the picture on the Control Display is switched to a grayscale. This permits an optimized depiction of traffic information. The day/night mode is disregarded in this setting. The symbols for the special destinations are no longer displayed.

1. "Navigation"
2. "Map"
3. Open "Options".

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. "Settings"
5. "Traffic conditions/gray map"

Symbols in map view

The symbols of traffic obstructions are displayed differently, depending on the scale of the map and location of the traffic obstruction in relation to the route.

Additional information in the map display

Depending on the map scale, the length, direction, and effects of a traffic obstruction are depicted by traffic symbols in the map or by bars along the planned route. The colors displayed depend on the information sent by the traffic information service.

- Red: traffic congestion
- Orange: stop-and-go traffic
- Yellow: heavy traffic
- Green: clear roads
- Gray: general traffic information such as road construction

The colors displayed depend on the information sent by the traffic information service.

Filtering of traffic bulletins

To set which traffic bulletins the system should display:

1. "Navigation"
2. "Map"
3. Open "Options".
4. "Traffic Info categories"
5. Select the desired categories.

Traffic bulletins of the selected categories are displayed.

- Traffic bulletins on incidents along the route are always displayed.
- For personal safety, traffic information that indicates a potential hazard can not be hidden.

Route guidance with traffic information

General information

In semi-dynamic route guidance systems, detour suggestions by the navigation system can be added manually. In dynamic route guidance systems, they are automatically included in the route guidance.

Semi-dynamic route guidance

With traffic information reception switched on, semi-dynamic route guidance is active.

The system takes into account the existing traffic information during route guidance. A message is displayed as a function of the route, the traffic information, and the possible alternate routes. When there are obstructions to traffic, an alternate route is provided. The difference in distance and time between the original route and the alternate route are also displayed.

Taking an alternate route:

"Detour"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

With particular hazards, e.g. objects on the roadway, a message is displayed without a possible alternate route.

It is also possible to take alternate routes can also be taken if the traffic reports are accessed via the list:

1. "Navigation"
2. "Map"
3. "Traffic Info"
4. "Detour information"
5. "Detour"

Dynamic route guidance

The route is automatically changed in the event of traffic obstructions.

- The system will not point out traffic obstructions on the original route.
- Traffic information will continue to be displayed on the map.
- Depending on the type of road and the nature and length of the traffic obstruction, the route can also be calculated so that you travel through the traffic obstruction.
- Certain hazards are displayed regardless of the setting.

To activate dynamic route guidance:

1. "Navigation"
2. Open "Options".
3. "Dynamic guidance"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

WHAT TO DO IF...

What to do if...

- The current position cannot be displayed?
  The position is in an unrecognized region, in a poor reception area, or the system is in the process of determining the position. Reception is best when you have an unobstructed view to the sky.
- The route guidance does not accept an address without the street name?
  A downtown area cannot be determined for the town or city that has been entered. Input any street in the selected town/city and start route guidance.
- The route guidance does not accept a destination?
  The destination data is not contained in the navigation data. Select a destination that is as close as possible to the original.
- The letters for a destination cannot be selected during destination entry?
  Stored data do not contain the data of the destination. Select a destination that is as close as possible to the original.
- The map view is displayed in grayscale?
  When the traffic info map is activated, the picture on the Control Display is switched to a grayscale. This permits an optimized depiction of traffic information.
- Voice instructions are no longer issued before intersections during route guidance?
  The area has not been fully recorded yet, or you have left the recommended route and the system requires a few seconds to calculate a new route suggestion.
- The navigation system does not react to entries?
  If the battery was disconnected, it takes about 10 minutes before the system is once again operational.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

ROCK ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

ON/OFF AND TONE

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

GENERAL INFORMATION

The following audio sources have shared control elements and setting options:

- Radio
- CD player
- External devices, e.g. MP3 player

CONTROLS

The audio sources can be operated using:

- Buttons near the CD player
- Onboard computer
- Buttons on the steering wheel, refer to page 10

Buttons near the CD player

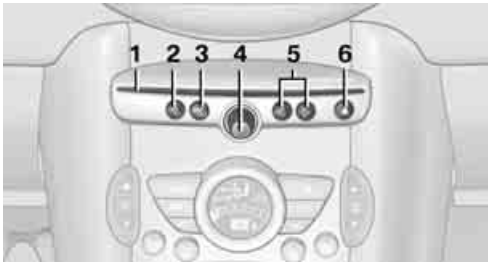

1 Drive for audio CDs
2 Selecting waveband
3 Changing the audio source
4 Sound output for entertainment on/off, volume
   - Press: switch on/off.
     When you switch on the unit, the radio station or track set most recently is played.
   - Turn: adjust volume.
5 Station scan/track search
   - Change radio station.
   - Selecting a track
6 Ejecting CD

SWITCHING ON/OFF

Entertainment audio output

Press the knob.

This symbol at the upper edge of the Control Display indicates that the sound output is switched off.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

ADJUSTING VOLUME

Turn the knob to the desired volume.

The volume can also be adjusted on the steering wheel, refer to page 10.

The setting is stored for the remote control currently in use; refer to Personal Profile, page 26.

SETTING TONE CONTROLS

Various tone settings can be changed, e.g. treble and bass or the speed-dependent volume control.
The tone settings are set for all audio sources at once.

The settings are stored for the remote control currently in use; refer to Personal Profile, page 26.

Treble, bass, balance, fader

- "Treble": treble adjustment.
- "Bass": bass adjustment.
- "Balance": volume distribution right/left.
- "Fader": volume distribution front/back.

Adjustments

1. "CD/Multimedia", "Radio" or "Settings".
2. "Tone"

3. Select the desired tone setting.

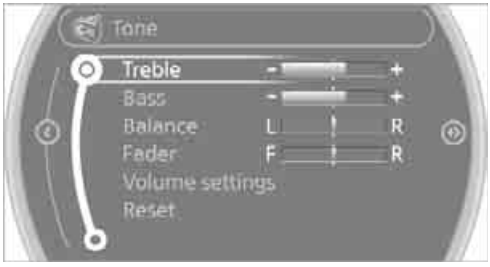

4. To adjust: turn the MINI joystick.
5. To store: press the MINI joystick.

Volume levels

- "Speed volume": volume is adapted depending on the speed
- "PDC": volume of the PDC acoustic signal relative to the entertainment sound output
- "Gong": volume of the acoustic signal, e.g. for the acoustic Safety Belt Reminder relative to the entertainment sound output

Mobile phone preparation Bluetooth

- "Microphone": volume of the microphone during a phone conversation.
- "Loudspeak.": volume of the speaker during a phone conversation.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Adjustments

1. "CD/Multimedia", "Radio" or "Settings".
2. "Tone"
3. "Volume settings"
4. Select the desired volume setting.

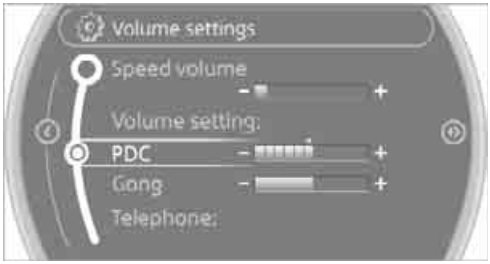

5. To adjust: turn the MINI joystick.
6. To store: press the MINI joystick.

Resetting tone settings

All tone settings can be reset to the default value.

1. "CD/Multimedia", "Radio" or "Settings".
2. "Tone"
3. "Reset"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

RADIO

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

GENERAL INFORMATION

Your radio is designed for reception of the following stations:

- FM and AM
- HD Radio
- Satellite radio

AM/FM STATION

Selecting a station

Press the knob if the sound output is switched off.

1. "Radio"

2. "FM" or "AM"
3. Select the desired station.

The selected station is stored for the remote control currently in use.

Changing stations

Turn and press the MINI joystick

or

Press the ◀ ▶ button for the corresponding direction

or

Press the buttons on the steering wheel, refer to page 10.

Selecting a station manually

Station selection via the frequency.

1. "Radio"
2. "FM" or "AM"
3. "Manual"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. Select the frequency: turn the MINI joystick.

To store the station: press the MINI joystick.

Storing stations

1. "Radio"
2. "FM" or "AM"
3. Select the desired station.

4. Press the MINI joystick.
5. Select the desired memory location.

Press and hold the MINI joystick to save a radio station that appears in the list of stations, but is not being listened to.

The stations are stored for the remote control currently in use.

RDS – Radio Data System

In the FM frequency range, additional information is transmitted via RDS. If the reception conditions are good, the station names are shown on the Control Display. If the reception is weak or disrupted, it can take some time before the station names are displayed.

Switching the RDS on/off

1. "Radio"
2. "FM"
3. Open "Options".
4. "RDS"

The setting is stored for the remote control currently in use.

HD RADIO™ RECEPTION

Many radio stations transmit analog and digital signals. If a digital radio network is available, these stations can be received digitally and thus with improved sound quality.

License conditions

HD Radio technology is manufactured under U.S. and Foreign Patents licensed from iBiquity Digital Corp. HD Radio™ and the HD and HD Radio logos are proprietary trademarks of iBiquity Digital Corp.

Activating/deactivating digital radio reception

1. "Radio"
2. "FM" or "AM"
3. Open "Options".
4. "HD Radio Reception"

The setting is stored for the remote control currently in use.

HD This symbol is displayed when a station is being received digitally.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

When setting a station with a digital signal, it may be a few seconds until the station is reproduced in digital quality.

In areas in which the station is not continuously received in digital mode, playback switches between analog and digital reception. In this case, switch off digital radio reception.

Displaying additional information

Some stations broadcast additional information on the current track, such as the name of the artist.

1. Select the desired station.
2. Open "Options".
3. "Station info"

Selecting a substation

The symbol indicates that a main station also broadcasts additional substations. The station name of the main station ends in HD1. The station names of the substations end in HD2, HD3, etc.

1. Select the desired station.
2. Press the MINI joystick.
3. Select the substation.

When reception is poor, the substation is muted for several seconds.

STORED STATIONS

It is possible to store up to 40 stations.

Selecting a station

1. "Radio"
2. "Presets"
3. Select the desired station.

Storing a station

The station currently selected is stored.

1. "Radio"
2. "Presets"
3. "Store station"

4. Select the desired memory location.

The list of stored stations is stored for the remote control currently in use.

Deleting a station

1. "Radio"
2. "Presets"
3. Select the desired station.
4. Open "Options".
5. "Delete entry"

SATELLITE RADIO

General information

The channels are offered in fixed packages. Packages must be activated by telephone.

Navigation bar

Symbol	Function
	Changing list view
	Selecting category
	Entering channel directly
	Time shift

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Symbol	Function
☆* ☆	Accessing favorites, selecting the My Favorites category
☆+	Managing favorites
	Traffic Jump

Managing subscription

Clear reception is required for activating and deactivating channels. Reception is best when you have an unobstructed view to the sky. The channel name is displayed in the status line.

Activating channels

The category 'Unsubscribed Channels' includes all channels that are not activated.

1. "Radio"
2. "Satellite radio"
3. "Category"

4. Select the category 'Unsubscribed Channels'.
5. Select desired channel.
   The telephone number and electronic serial number, ESN, are displayed.
6. Dial the telephone number to have the channels activated.

This telephone number can also be used to deactivate the channels.

Deactivating channels

1. "Radio"
2. "Satellite radio"
3. Open "Options".
4. "Manage subscription"

The telephone number and electronic serial number, ESN, are displayed.

5. Call Sirius to deactivate the channels.

Selecting channels

You can only listen to activated channels.

The selected channel is stored for the remote control currently in use.

Using the onboard computer

1. "Radio"
2. "Satellite radio"
3. Select "All channels" or the desired category.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. Select desired channel.

Using the buttons near the CD player

Press the button for the corresponding direction.
The next channel is selected.

Using direct channel entry

1. "Radio"
2. "Satellite radio"
3. "Set channel"
4. Turn the MINI joystick until you reach the desired channel and then press the MINI joystick.

Storing channel

1. "Radio"
2. "Satellite radio"
3. Select "All channels" or a desired category.
4. Select desired channel.
5. Press the MINI joystick again.
6. Press the MINI joystick again to confirm the highlighted channel.

7. Select the desired memory location.

The channels are stored for the remote control currently in use.

Changing list view

The list view changes each time the first symbol on the navigation bar is pressed.

Information about the channel is displayed.

Symbol	Function
	Channel name
	Artist
	Track

Selecting category

1. "Radio"
2. "Satellite radio"
3. "Category"
4. Select the desired category.

Time shift

Approximately one hour of the channel currently being listened to is temporarily stored in a cache memory. Prerequisite: the signal must be available.

The stored audio track can be played back at a different time from the live broadcast. If the cache memory is full, then the older tracks are recorded over. The cache memory is deleted if a new channel is selected.

Accessing Time shift

1. "Radio"
2. "Satellite radio"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

3. "Replay - Time shift"

- The red arrow indicates the current playback position.
- The time difference from the live broadcast is displayed next to the cache memory bar.
- For live transmissions: "live".

Time shift menu

Symbol	Function
	Go to live broadcast
	Playback/pause
	Next track
	Previous track
	Fast forward
	Reverse
	Automatic time shift deactivated/activated

Automatic time shift

When the function is activated, audio playback is stopped automatically in the event of:

- Incoming and outgoing telephone calls.
- Activation of the voice activation system.
- Muting.

The audio playback then continues with a time delay.

Activating

1. "Radio"
2. "Satellite radio"
3. "Replay - Time shift"
4. "Automatic time shift"

Deactivating

"Automatic time shift"

Storing favorites

Up to 30 favorites can be stored in the favorites list. Possible favorites include artist, track, game, league, and team.

Storing artist, track, or game

Only current broadcasts can be stored as favorites. The channel information must be available.

1. "Radio"
2. "Satellite radio"
3. Select "All channels" or the desired category.
4. Select desired channel.
5. Press the MINI joystick again.
6. Select artist, track, or game.

Storing league or team

Leagues or teams can be added to the favorites from a selection list.

1. "Radio"
2. "Satellite radio"
3. "Manage favorites"
4. "Add sports information"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

5. Select the desired league.
6. Select "Add all teams" or a desired team.

Accessing favorites

If an activated favorite is being played, the message "Favorite alert!" appears for approx. 20 seconds.

Select ☆ "Favorites" while the alert message is being displayed.

The displayed favorite will be played.

If it receives no notification, the system switches into the 'My Favorites' category. All of the favorites currently being broadcast can be selected from a list.

Managing favorites

Activating/deactivating favorites

Favorites can be activated or deactivated globally and individually.

1. "Satellite radio"
2. ☆ "Manage favorites"
3. Select "Activate alert" or desired favorites.

The setting is stored for the remote control currently in use.

Deleting favorites

1. "Satellite radio"
2. ☆ "Manage favorites"
3. Highlight the favorites you wish to delete.
4. Open "Options".
5. "Delete entry"

Traffic Jump

Traffic and weather information for a selected region are broadcast at intervals of a few minutes.

Selecting region

1. "Radio"
2. "Satellite radio"
3. Open "Options".
4. "Set jump"
5. Select the desired region.

The region is stored for the remote control currently in use.

Activating/deactivating Jump

1. "Radio"
2. "Satellite radio"
3. "Jump to:"

As soon as information about the selected region becomes available, it is broadcast.

A new panel appears in the display.

Cancel Traffic Jump: "Cancel".

Symbol	Meaning
	Information will be broadcast soon.
	Information is currently being broadcast.

Select one of the symbols to deactivate Traffic Jump.

Automatic update

About twice a year, Sirius carries out an update of the names and positions of the channels. The update occurs automatically and can take several minutes.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Notes

- Under some circumstances, reception may not be possible, e.g. under certain environmental or topographical conditions. The satellite radio has no influence on this.
- The signal may not be available in tunnels or underground garages or near trees, mountains, or other powerful sources of radio interference.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CD PLAYER

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

GENERAL INFORMATION

Inserting CD

Insert the CD into the drive with the labeled side up. Die CD is automatically pulled in.
Playback starts automatically if the sound output is on. For CDs with compressed audio files, it can take several minutes to the data, depending on the folder structure.

Playable formats

CD player

- CD: CD-ROM, CD-R, CD-RW, CD-DA
- Compressed audio files: MP3, WMA, AAC

Ejecting CD

Press the ⏏ button on the CD player.
The CD will be slid a short distance out from the drive.

AUDIO PLAYBACK

Selecting the track using the button

Press the ◀ ▶ button for the corresponding direction repeatedly until you reach the desired track.

Selecting the track using the onboard computer

Audio CDs

1. "CD/Multimedia"
2. "CD"
3. Select the desired track. Press the MINI joystick to start playback.

CDs with compressed audio files

Depending on the data, it is possible that not all indications on the CD will be correctly displayed.

1. "CD/Multimedia"
2. "CD"
3. Select the directory, if necessary.
   To change to a higher level directory: move the MINI joystick to the left.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. Select a track and press the MINI joystick.

Displaying information about the track

If information about a track has been stored, it is displayed automatically:

- Artist
- Album title
- Number of tracks on the CD
- Track file name

Random play sequence

The tracks on the current CD are played once each in random order.

1. "CD/Multimedia"
2. "CD"
3. Select the desired CD.
4. Open "Options".
5. "Random"

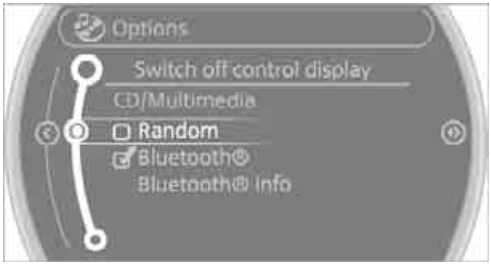

Switch off random play sequence: press the MINI joystick.

Fast forward/reverse

Press and hold the ◀ ▶ button for the corresponding direction.

Automatic replay

Selected tracks, folders, or CDs are automatically repeated.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

EXTERNAL DEVICES

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

OVERVIEW

Different external devices can be connected to the vehicle. Sound is output over the vehicle speakers. Depending upon how the external device is connected to the vehicle, the device may be operated using the MINI joystick.

Symbol	Meaning
	USB interface
	Music interface for smartphones
	Bluetooth audio
	AUX-In connection

AUX-IN CONNECTION

Overview

- It is possible to connect audio devices, e.g. MP3 players. Sound is output over the vehicle speakers.
- Recommended settings: mid-level tone and volume settings on the audio device. Tone may depend on the quality of the audio files.

Connecting

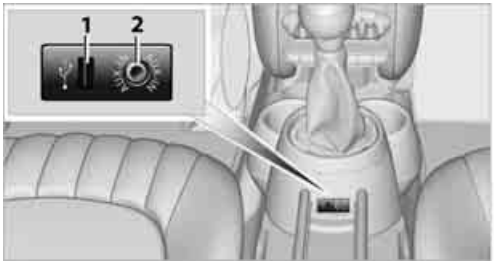

1 USB interface

2 Connection for audio playback: TRS connector 1/8"/3.5 mm

For audio playback over the vehicle speakers, connect the headphones or line-out connection of the device to the AUX-In connection **2**.

Make sure that the plug is inserted into the AUX-IN port all the way in until it reaches the stop.

Starting audio playback

The audio device must be switched on.

1. "CD/Multimedia"
2. "External devices" if applicable

3. "AUX front"

Sound is output on the vehicle loudspeakers.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Volume

The volume of the sound output depends on the audio device. If this volume greatly deviates from the other audio sources, then the volume should be equalized.

Adjusting volume

1. "CD/Multimedia"
2. "External devices" if applicable
3. "AUX front"
4. "Volume"

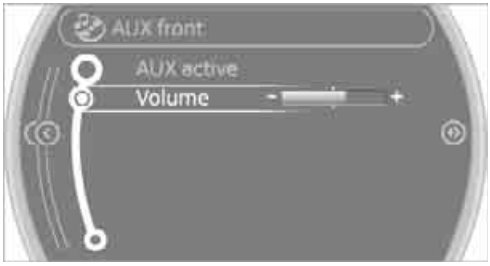

5. Turn MINI joystick until the desired volume is set and then press the MINI joystick.

USB AUDIO INTERFACE/ MUSIC INTERFACE FOR SMARTPHONES

Overview

It is possible to connect external audio devices. They are operated using the onboard computer. Sound is output over the vehicle speakers.

Options for connecting external devices

- Connection via USB audio interface: Apple devices, USB devices such as MP3 players, USB memory sticks, or mobile phones that are supported by the USB audio interface.
- Connection via snap-in adapter if the vehicle is equipped with a music interface for smartphones: Apple iPhone or mobile phones.

Because of the large number of audio devices available on the market, an operation via the vehicle cannot be guaranteed for every audio device/mobile phone.
Ask your MINI dealer for suitable audio devices/ mobile phones.

File systems

Popular file systems for USB devices are supported. The manufacturer of your MINI recommends the FAT 32 format.

Audio files

Playback of standard audio files is possible, depending on the vehicle equipment:

- MP3
- WMA
- WAV (PCM)
- AAC, M4A
- Without voice activation system: Playback lists: M3U
- With voice activation system: Playback lists: M3U, WPL, PLS

Video files

Playback of standard video files with a compatible Apple device is possible:

- MPEG4
- H.264

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Connecting via the USB audio interface

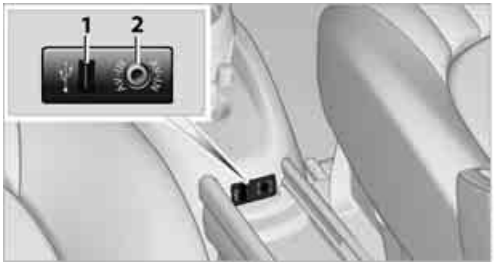

1 USB interface

2 AV-In connection for audio/video playback: TRS connector 1/8"/3.5 mm

Apple device

A special adapter cable is available for connecting the Apple device. The adapter cable is required for a proper connection.
Further information:

- At: www.mini.com/connectivity
- At your MINI dealer.

For audio playback over the vehicle speakers, connect the Apple device using the special adapter cable with AV-In connection **2** and USB interface **1** or using a flexible adapter cable with a USB interface **1**.

The USB audio interface supports the menu structure of the Apple device.

USB device

To protect the USB interface and USB device from mechanical damage, connect them with a flexible adapter cable.

Connect the USB device to the USB interface **1**.

After initial connection

Track information, e.g. artist or music style and the playlists of the USB device are imported into the vehicle. This process can take some time. The time required is dependent on the USB device and on the number of tracks.

During transmission, the tracks can be accessed via the file directory.

Number of tracks

The data from up to four USB devices or for approx. 26,000 tracks can be stored in the vehicle. If a fifth device is connected or if more than 26,000 tracks are stored, then the data of existing tracks may be deleted.

Copy protection

Music tracks with integrated Digital Rights Management (DRM) cannot be played.

Audio playback

Starting audio playback

1. "CD/Multimedia"
2. "External devices"
3. Select the or symbol and press the MINI joystick.

Playback begins with the first track.

Track search

Selection is possible via:

- Playback lists
- Information: music style, artist; if applicable, composer, album, track.
- Additionally for USB devices: file directory; if applicable, composer.

Track titles are displayed if they have been stored in the Latin alphabet.

Starting the track search

1. "CD/Multimedia"
2. "External devices"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

3. Select the or symbol.

4. Select desired category, e.g. "Genre", "Artist".

   All entries are displayed in a list.

   ▷ Open "A-Z search" and enter the desired input. When a letter is entered, the results are filtered using this letter as the first letter. If multiple letters are entered, all results that contain that sequence are displayed.

   ▷ Select the desired entry from the list.

5. Select additional categories if desired.

   Not all categories need to be selected. For example, if all of the tracks by a certain artist are to be displayed, call up that artist only. All of the tracks by that artist are then displayed.

6. "Play"

Restarting a track search

"New search"

Playback lists

To open playback lists.

1. "CD/Multimedia"
2. "External devices"
3. Select the or symbol.
4. "Playlists"

Current playback

List of tracks currently being played.

1. "CD/Multimedia"
2. "External devices"
3. Select the or symbol.
4. "Current playback"

Random play sequence

The current list of tracks is played in random sequence.

1. "CD/Multimedia"
2. "External devices"
3. Open "Options".
4. "Random"

Fast forward/reverse

Buttons on the steering wheel or CD player:

Press and hold the button for the corresponding direction.

Video playback

Overview

Video playback is only possible with an iPod/ iPhone. To connect, use a video adapter cable or possibly a snap- in adapter.

Playback

The video image on the is displayed control display when the vehicle is standing still, in some countries only when the hand brake is engaged or if the transmission selector lever is in the P position.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

1. "CD/Multimedia"
2. "External devices"
3. Select the or symbol and press the MINI joystick.
4. "Video"

5. Select the desired file.

   Select category in file directory, if applicable.

6. Press the MINI joystick.

   The playback of the selected video file is started.

Notes

Do not subject the audio device to extreme environmental conditions, e.g. extremely high temperatures, refer to the operating instructions for the audio device. Otherwise the audio device may be damaged, impairing driving safety while driving.◀

Depending on the configuration of the audio files, e.g. bit rates greater than 256 Kbit/s, proper playback cannot always be ensured.

Audio and video playback from using a snap-in adapter may only be possible if a there is no cable connected to the AV-In connector.

Information on connection

- The connected audio device is supplied with a max. power of 500 mA if supported by the device. Therefore, do not connect the device to the power socket in the vehicle.
- Do not use force when plugging the connector into the USB interface.
- Do not connect any devices, e.g. fans or lamps, to the USB audio interface.
- Do not connect USB hard drives.
- Do not use the USB audio interface to recharge external devices.

BLUETOOTH AUDIO

Overview

- It is possible to use Bluetooth to play music files from external devices, e.g. audio devices or mobile phones.
- Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.
- Sound is output over the vehicle speakers.
- The volume of the sound output depends on the device. If necessary, change the volume setting on the device.
- Up to four external devices can be paired with the vehicle.

Requirements

- Suitable device. Information is available at www.mini.com/connectivity.
- Device operational.
- Ignition switched on.
- Bluetooth activated in vehicle, refer to page 175, and in the device.
- Bluetooth presets in the device are required, e.g. connection not confirmed or visible, refer to Owner's Manual for the device.
- A number with at least 4 and at most 16 digits has been established as the Blue-

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

tooth passkey. Only required once for pairing.

Pairing and connecting

Only pair the device when the vehicle is stopped; otherwise, inattention may lead to endangerment of passengers or other road users.◀

1. "CD/Multimedia"
2. "Bluetooth® (audio)"
3. "Bluetooth® audio" if applicable
4. "Add new phone"

   The Bluetooth name of the vehicle is displayed.

5. To perform other operations on the device, refer to the operating instructions for the device: e.g. search for and connect Bluetooth device or a new device.

   The Bluetooth name of the vehicle appears on the device's display.
6. Select the Bluetooth name of the vehicle on the device's display.

   The onboard computer or the device will prompt you to enter the same Bluetooth passkey.
7. Enter the passkey and confirm.

   or

   Compare the control number on the vehicle display with the control number on the mobile phone display. Confirm the control number in the mobile phone and in the vehicle.

   "OK".

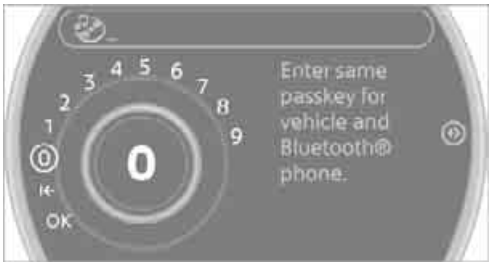

8. Select desired functions with which the device is to be connected, e.g. "Audio".
9. "OK"

If the pairing was successful, the device is displayed as connected.

♫ symbol displayed in white: device is active as an audio source.

If the pairing was not successful: what to do if…, refer to page 160.

Connecting a particular device

A device that has already been paired can be connected as an active audio source.

Connection is not possible if a data exchange is currently taking place via a mobile phone that is connected via Bluetooth.

Prerequisite

If necessary, activate the audio connection of the desired device from the list of paired devices.

1. "CD/Multimedia"
2. "Bluetooth® (audio)"
3. "Bluetooth® audio" if applicable
4. Select the desired device from the list of paired devices.
5. Open "Options".
6. "Configure phone"
7. Activate "Audio".
8. "OK"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Connecting a device

1. "CD/Multimedia"
2. "Bluetooth® (audio)"
3. "Bluetooth® audio" if applicable
4. Select the desired device from the list of paired devices.

♫ symbol displayed in white: device is active as an audio source.

Playback

General information

- The display of track information depends on the device.
- Operation via the device or the onboard computer are both possible.
- Playback is interrupted if a data exchange takes place via a mobile phone that is connected via Bluetooth.

Starting playback

1. Connect device.
2. "CD/Multimedia"
3. "External devices"
4. Select the ᛒ symbol.

5. Select the desired track from the list.

Playback menu

Depending on the device, all functions may not be available.

Symbol	Function
⏭	Next track Fast forward: press and hold the symbol.
⏮	Previous track Reverse: press and hold the symbol.

Track search

Depending on the device, it is possible to search by track.

1. "CD/Multimedia"
2. "External devices"
3. Select the ᛒ symbol.
4. "Search device content"
5. "A-Z search"
6. Select desired entry or directory.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Player program

Depending on the device, there may be various programs for playing music files.

1. "CD/Multimedia"
2. "External devices"
3. Select the symbol.
4. Open "Options".
5. "Select player"
6. Select the desired program.

Disconnecting an audio connection

1. "CD/Multimedia"
2. "Bluetooth® (audio)"
3. Select the desired device from the list of connected devices.
4. Open "Options".
5. "Configure phone"
6. Deactivate "Audio".
7. "OK"

With a mobile phone, only the audio connection is disconnected. All other connections remain active.

Unpairing device

1. "CD/Multimedia"
2. "Bluetooth® (audio)"
3. "Bluetooth® audio" if applicable
4. Highlight the device to be unpaired.
5. Open "Options".
6. "Remove phone from list"

What to do if...

Information about suitable devices is available at www.mini.com/connectivity.

Suitable mobile phones, refer to page 174.

Device not supported by vehicle.

- If necessary, carry out a software update, refer to page 161.

Device could not be paired or connected.

- Do the Bluetooth passkeys on the device and vehicle match? Enter the same passkey on the device and via the onboard computer.
- A multi-digit passkey may be required.
- Is the passkey input taking longer than 30 seconds? Repeat the pairing procedure.
- Are too many Bluetooth devices connected to the device or to the vehicle? If necessary, delete the connections with other devices.
- Is the mobile phone in power economy mode or does it only have a small amount of battery charge remaining? Charge the mobile phone in the snap-in adapter or via a charging cable.
- Depending on the mobile phone, it may only be possible to connect one device to the vehicle. Unpair the connected device from the vehicle and only pair and connect one device.
- Is the device no longer responding? Switch the device off and back on again.
- Repeat the pairing procedure.

No music can be played.

- Start the program for playing music files on the device and if necessary, select a track via the device.
- Activate and deactivate the radio mute on the radio control panel.

Music files only play quietly.

- Adjust volume settings on the device.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Videos cannot be played or can only be played with a delayed audio output.

▷ Check the device compatibility. Information is available at www.mini.com/connectivity.

Playback is interrupted by the press of a button or other messages on the device.

▷ Switch off key tones and other acoustic signal on the device.

Playback is interrupted by a phone call or traffic report and does not automatically continue.

▷ Activate and deactivate the radio mute on the radio control panel.

Playback is not possible when the mobile phone is connected via Bluetooth audio and at the same time via the music interface for smartphones at the snap-in adapter.

▷ Disconnect one of the two connections, e.g. the audio connection, refer to page 160, and start playback again.

If you have gone through all items in the list and still cannot activate the desired function please contact the Hotline or your MINI dealer.

SOFTWARE UPDATE

The vehicle supports various external devices, depending on the software it is currently using. A software update can enable the vehicle to support, for example, new mobile phones or new external devices.

Software updates and associated, up-to-date instructions are available on the web page www.mini.com/connectivity.

Displaying current version

The currently installed software is displayed.

1. "Settings"
2. "Software update"
3. "Show current version"

Updating software

The software update can only be performed when stopped.

1. Save the file for the software update in the main directory of a USB data storage device.
2. Connect the USB data storage device to the USB port in the center console, refer to page 154. Updating using the USB port in the glove compartment is not possible.
3. "Settings"
4. "Software update"
5. "Update software"

6. "Start update"
7. "OK"

All of the listed software updates are installed.

Reinstalling previous version

The software version before the last software update can be restored.

The restoring to the previous version can only be performed when stopped.

1. "Settings"
2. "Software update"
3. "Restore previous version"
4. Select "OK" twice.

All of the listed software updates are removed.

Note

MINI Connected, Office functions, and connected devices may temporarily be unavailable during a software update or while restoring to the previous version. Wait a few minutes until the functions are available once more.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CONNECT ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

HANDS-FREE DEVICE BLUETOOTH

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

OVERVIEW

The concept

Mobile phones can be connected to the vehicle through Bluetooth.

Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

After being paired once, when the ignition is switched on, these devices are automatically detected as soon as they are present in the vehicle and can be controlled via the onboard computer, the buttons on the steering wheel, and by voice.

Up to four mobile phones can be paired.

It may be necessary for some functions to be activated by the mobile phone provider.

Only make entries when traffic conditions permit. Do not hold the mobile phone in your hand while you are driving; use the hands-free system instead. If you do not observe this precaution, your being distracted can endanger vehicle occupants and other road users.

Suitable mobile phones

Precise information as to which mobile phones are supported by the hands-free device can be found at www.mini.com/connectivity.

With a certain software version, these suitable mobile phones support the vehicle functions described below.

With other mobile phones or software versions, malfunctions may occur.

A mobile phone that is connected to the vehicle should not be operated via the mobile phone keypad; otherwise, malfunctions may occur.

Displaying vehicle identification number and software part number

To check which mobile phones are supported by the hands-free device, the vehicle identification number and the software part number will be required. The software version of the mobile phone may also be required.

1. "Telephone"
2. Open "Options".
3. "Bluetooth® info"
4. "Display system information"

Notes

Do not expose your mobile phone to extreme ambient conditions, for example, very high temperatures; otherwise, functions on your mobile phone may not work. Follow the operating instructions for your mobile phone.

PAIRING/UNPAIRING MOBILE PHONE

Requirements

- Suitable mobile phone, refer to page 164.
- Mobile phone operational.
- Bluetooth activated in vehicle, refer to page 165, and in the mobile phone.
- Bluetooth presets in the mobile phone are required, e.g. connection not confirmed or visible, refer to Owner's Manual for the mobile phone.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

- A number with at least 4 and at most 16 digits has been established as the Bluetooth passkey. Only required once for pairing.
- Compare the control number on the Control Display with the control number on the mobile phone display. Confirm the control number in the mobile phone and in the vehicle.
- Radio readiness switched on.

Activating/deactivating Bluetooth link

Bluetooth is not permitted everywhere. Comply with all safety guidelines and regulations.

1. "Telephone"
2. Open "Options".
3. "Bluetooth®"

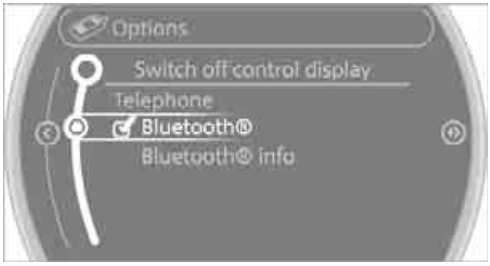

Pairing and connecting

Only pair the mobile phone when the vehicle is stopped; otherwise, inattention may lead to endangerment of passengers or other road users.◀

1. "Telephone"
2. "Bluetooth® (phone)"
3. "Add new phone"

   The Bluetooth name of the vehicle is displayed.

4. To perform other operations on the mobile phone, refer to the Owner's Manual for the mobile phone: e.g. search for and connect Bluetooth device or a new device.

   The Bluetooth name of the vehicle appears on the mobile phone display.
5. Select the Bluetooth name of the vehicle on the mobile phone display.
6. The onboard computer or the mobile phone will prompt you to enter the same Bluetooth passkey.

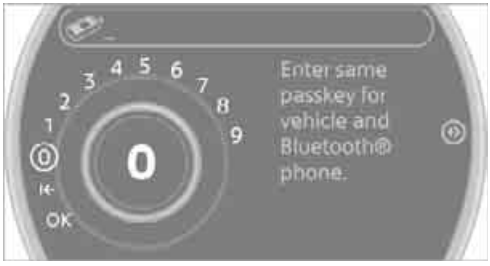

Enter the passkey and confirm.

or

Compare the control number on the vehicle display with the control number on the mobile phone display. Confirm the control number in the mobile phone and in the vehicle.

"OK"

7. Select the functions that are to be used for the mobile phone.
8. "OK"
9. Move the MINI joystick to the left.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

If pairing was successful, the mobile phone appears at the top of the list of mobile phones.

If the pairing was not successful: what to do if..., refer to page 166.

Following the initial pairing

- The mobile phone is detected/connected in the vehicle within a short period of time when the engine is running or radio readiness is switched on.
- After identification, phone book entries are imported from the mobile phone and/or SIM card of the telephone, depending on the telephone.
- Four mobile phones can be paired.
- Specific settings may be necessary in some mobile phones, e.g. authorization or a secure connection, refer to the Owner's Manual for the mobile phone.

Connecting a particular mobile phone

1. "Telephone"
2. "Bluetooth® (phone)"

   All paired mobile phones are listed.
3. Select the mobile phone to be connected.

Unpairing mobile phone

1. "Telephone"
2. "Bluetooth® (phone)"

   All paired mobile phones are listed.
3. Highlight the mobile phone to be unpaired.
4. Open "Options".
5. "Remove phone from list"

What to do if...

For information on suitable mobile phones, refer to page 164.

The mobile phone could not be paired or connected.

- Is Bluetooth activated in the vehicle and in the mobile phone? Activate Bluetooth in the vehicle and in the mobile phone.
- Do the Bluetooth passkeys on the mobile phone and the vehicle match? Enter the same passkey on the mobile phone and via the onboard computer.
- A multi-digit passkey may be required.
- Is the passkey input taking longer than 30 seconds? Repeat the pairing procedure.
- Are too many Bluetooth devices connected to the mobile phone? If so, delete the connections with other devices on the mobile phone.
- Is the mobile phone in power economy mode or does it only have a small amount of battery charge remaining? Charge the mobile phone using a charging cable.
- Depending on the mobile phone, it may only be possible to connect one device to the vehicle. Unpair the connected device from the vehicle and only pair and connect one device.
- Is the mobile phone no longer responding? Switch the mobile phone off and back on again. Repeat the pairing procedure.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Is the mobile phone no longer responding?

- Switch the mobile phone off and back on again. Repeat the pairing procedure.
- Is the ambient temperature too high or too low? Do not subject your mobile phone to extreme ambient temperatures.

Phone book entries are not displayed, not all of them are displayed, or they are displayed incompletely.

- The transfer of phone book entries has not yet completed.
- It is possible that only the phone book entries of the mobile phone or the SIM card are transferred.
- It may not be possible to display phone book entries with special characters.
- The number of phone book entries to be stored is too high.
- Is the amount of data for the contact too large, e.g., because of stored information such as addresses? Reduce the number of data entries.

The telephone connection quality is low.

- Depending on the mobile phone, it is possible to adjust the strength of the Bluetooth signal.
- Place mobile phone in the area of the center console.

If you have gone through all items in the list and still cannot activate the desired function please contact the Hotline or your MINI dealer.

OPERATION

Adjusting volume

Turn the knob until the desired volume is reached.

The setting is stored for the remote control currently in use.

Incoming call

Receiving calls

If the number of the caller is stored in the phone book and is transmitted by the network, then the name and number of the contact are displayed; otherwise, only the number is displayed.

If a contact is assigned more than one phone number, then only the name of the caller is transmitted.

Accepting a call

Press the button on the steering wheel

or

"Accept"

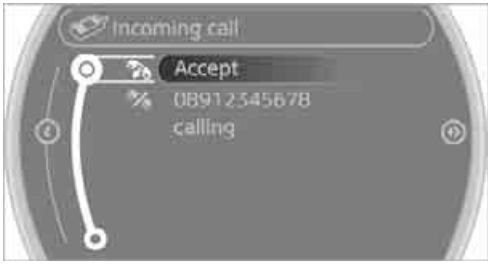

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Rejecting a call

"Reject"
The caller is redirected to the mailbox if it has been activated.

Ending a call

Press the button on the steering wheel

or

1. "Telephone"
2. "End call"

Entering phone numbers

Dialing a number

1. "Telephone"
2. "Dial number"
3. Select the digits individually.
4. Select the symbol.

It is also possible to enter phone numbers by voice, page 183.

Calls with multiple parties

General information

It is possible to switch between two calls and to connect two calls to form a conference call. These functions must be supported by the mobile phone and by the service provider.

Accepting a call while speaking to another party

This function may have to be activated by the service provider and the mobile phone may need to be adjusted for this.

When a second call comes in during an ongoing call, a call-waiting signal sounds.

"Accept"

The call is accepted and the existing call is put on hold.

Establishing a second call

Establish another call during an active call.

1. "Telephone"
2. "Active calls"
3. "Hold"
   The existing call is put on hold.

4. Dial the new phone number or select it from a list.

"Return"
The conversion that was on hold is continued.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Switching between two calls, toggling

Active call: highlighted.

The call on hold is identified with: "on hold...".

Select the symbol to switch to the call on hold.

Establishing a conference call

Two calls can be connected to a single telephone conference call.

1. Establish two calls.
2. "Conference call"

Both calls are always ended when a conference call is terminated. If one call is terminated by another party, the other call can be continued.

Keypad dialing

Use keypad dialing to gain access to network services or to control devices, e.g. to remotely access an answering machine. This requires the DTMF code.

1. "Telephone"
2. Select contact from a list or "Dial number"
3. "Keypad dialing"

4. Enter the DTMF code via the onboard computer.

For a conference call in progress, DTMF dialing is not possible.

Phone book

Displays

The phone book accesses the contacts of the telephone and shows all contacts for which a phone number is entered. The entries can be selected to make a call.

1. "Telephone"
2. "Phone book"

A symbol indicates the storage location of the contacts, refer to page 171.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Calling a contact

1. Select the desired contact.

   Select the symbol. Contact with one phone number. The connection is established.
2. Select the symbol. Contact with more than one phone number. Select phone number, the connection is established.

Call not possible, the mobile phone has no reception or network.

Editing a contact

Changing entries in the "Contacts" menu. If a contact is changed, the changes are not stored in the mobile phone. A copy of the entry is stored in the vehicle.

1. Highlight the contact.
2. Open "Options".
3. "Edit entry"

The contact can be edited.

Redialing

General information

The list of dialed numbers in the telephone are transferred to the vehicle, depending on the mobile phone. The last 20 phone numbers dialed are displayed. The sorting of the phone numbers depends on the mobile phone.

Selecting the number using the onboard computer

1. "Telephone"
2. "Redial"

3. Select the desired entry and phone number, if necessary.

The connection is established.

Deleting a single entry or all entries

Deleting entries depends upon the mobile phone.

1. Highlight the entry.
2. Open "Options".
3. "Delete entry" or "Delete list".

Saving an entry in the contacts

1. Highlight the entry.
2. Open "Options".
3. "Store as new contact" or "Add to existing contact".
4. Select the type of number: "Home", "Business", "Mobile" or "Other".
5. Complete the entries if necessary.
6. "Store contact" if necessary

Received calls

Displaying calls

The list of received calls in the telephone is transferred into the vehicle, depending on the mobile phone. The last 20 calls received are displayed. The sorting and displaying of phone numbers depends on the mobile phone.

1. "Telephone"
2. "Received calls"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Calling a number from the list

Select an entry.
The connection is established.

Deleting a single entry or all entries

Deleting entries depends upon the mobile phone.

1. Highlight the entry.
2. Open "Options".
3. "Delete entry" or "Delete list".

Saving an entry in the contacts

1. Highlight the entry.
2. Open "Options".
3. "Store as new contact" or "Add to existing contact".
4. Select the type of number: "Home", "Business", "Mobile" or "Other".
5. Complete the entries if necessary.
6. "Store contact" if necessary

Hands-free system

General information

Calls being conducted using the hands-free system can be continued using the mobile phone and vice versa.

From the mobile phone to the hands-free system

Calls that have been initiated from outside the Bluetooth range of the vehicle can be continued using the hands-free system if the ignition is switched on.

Depending on the mobile phone, the call is automatically switched to hands-free mode.

If the switch does not occur automatically, then follow the instructions that appear on the display of the mobile phone, also refer to the Owner's Manual for the mobile phone.

From hands-free system to mobile phone

Calls being conducted using the hands-free system can also be continued using the mobile phone if so desired, depending on the mobile phone.

At this point, follow the instructions that appear on the display of the mobile phone, also refer to the Owner's Manual for the mobile phone.

CONTACTS

General information

Contacts can be created and edited. The addresses can be used as destinations for navigation.

New contact

1. "Contacts"
2. "New contact"

3. If input boxes are already filled with previous entries: "Delete input fields"
4. To fill in the entry fields: select the symbol next to the entry field.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

5. Input text, refer to page 20.

   When equipped with a navigation system: enter address. It is only possible to enter addresses that are contained in the navigation data stored in the vehicle. This ensures that route guidance is possible for all addresses.
6. "Store" if necessary
7. "Store contact in vehicle"

Defining a home address

It is possible to store a home address. It is listed at the beginning of the contacts.

1. "Home"
2. Create a contact.
3. "Store contact in vehicle"

My contacts

General information

Listing all contacts from the vehicle.

Displaying contacts

1. "Contacts"
2. "My contacts"

All contacts are listed in alphabetical order. Depending on the number of contacts, an A-Z search is offered.

A symbol indicates the storage location of the contacts:

Symbol	Storage location
No symbol	In the vehicle; the address has not been checked as a destination.
	In the vehicle; the address has been checked as a destination.
	Mobile phone

Editing a contact

1. Select the desired contact.
2. "Edit contact"

3. Change the entry.
4. Move the MINI joystick to the left.
5. "Yes"

If a contact that comes from the mobile phone is edited, the changes are not stored on the mobile phone. A copy of the entry is stored in the vehicle, and only this copy is displayed. Under certain conditions, an identical contact entry is generated.

Selecting a contact as a destination

1. Select the desired contact.
2. Select address.
3. "Start guidance" or "Add as another destination"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Checking the address as a destination

An address that is to be used in route guidance must correspond to the navigation data stored in the vehicle. The address can be checked to ensure this.

1. Select the desired contact and highlight the address.
2. Open "Options".
3. "Check as destination"
4. Correct and store the address, if necessary.

Selecting name sorting

Names can be displayed in different orders.

1. "My contacts"
2. Open "Options".
3. "Display: last, first name" or "Display: first, last name"

Depending on how the contacts were stored in the mobile phone, the sorting of names can differ from the sorting selected.

Deleting contacts

1. "My contacts"
2. Highlight the contact.
3. Open "Options".
4. "Delete contact" or "Delete all contacts".

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MOBILE PHONE PREPARATION BLUETOOTH

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

OVERVIEW

The concept

Mobile phones or other external devices, e.g. audio players, can be connected to the vehicle via Bluetooth.

Bluetooth® is a registered trademark of Bluetooth® SIG, Inc.

After being paired once, when the ignition is switched on, these devices are automatically detected as soon as they are present in the vehicle and can be controlled via the onboard computer, the buttons on the steering wheel, and by voice.

Depending on whether they are functioning as a telephone and/or as an audio source, external devices can be used via the vehicle. The telephone functions will be described below. Operation of audio functions, refer to page 157.

It may be necessary for some functions to be activated by the mobile phone provider.

Only make entries when traffic conditions permit. Do not hold the mobile phone in your hand while you are driving; use the hands-free system instead. If you do not observe this precaution, your being distracted can endanger vehicle occupants and other road users.◀

Snap-in adapter

The snap-in adapter, refer to page 185, makes it possible to:

- Accommodate the mobile phone.
- Recharge its battery.
- Connect it to an external antenna of the vehicle.

  This assures a better network connection and constant sound quality.

A mobile phone that is connected to the vehicle should not be operated via the mobile phone keypad; otherwise, malfunctions may occur.

Suitable mobile phones

For precise information as to which mobile phones and external devices with Bluetooth interfaces are supported by the mobile phone preparation package, go to www.mini.com/connectivity.

With a certain software version, these suitable mobile phones support the vehicle functions described below.

With other mobile phones or software versions, malfunctions may occur.

It is possible to perform a software update, refer to page 161.

Displaying vehicle identification number and software part number

Checking which mobile phones are supported by the mobile phone preparation requires the vehicle identification number and software part number. The software version of the mobile phone may also be required.

1. "Telephone"
2. Open "Options".
3. "Bluetooth® info"
4. "Display system information"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Notes

Do not expose your mobile phone to extreme ambient conditions, for example, very high temperatures; otherwise, functions on your mobile phone may not work. Follow the operating instructions for your mobile phone.

PAIRING/UNPAIRING MOBILE PHONE

Overview

- Using a mobile phone as a telephone.
- Using the mobile phone as an auxiliary phone.
- Using a mobile phone as an audio source.
- Using an audio device as an audio source, refer to page 157.

Functions supported by the mobile phone and audio device are displayed as symbols during the pairing.

White symbol: function active.

Gray symbol: function inactive.

Symbol	Function
	Telephone
	Auxiliary phone
	Audio source

Up to four external devices can be paired. Two devices can be connected to the vehicle at a time and used for different functions. The phone can be used to perform all of the following phone functions.

Requirements

- Suitable mobile phone, refer to page 174.
- Mobile phone operational.
- Bluetooth activated in vehicle, refer to page 175, and in the mobile phone.
- Bluetooth presets in the mobile phone are required, e.g. connection not confirmed or visible, refer to Owner's Manual for the mobile phone.
- If necessary, deactivate the audio connection, refer to page 176.
- A number with at least 4 and at most 16 digits has been established as the Bluetooth passkey. Only required once for pairing.
- Compare the control number on the Control Display with the control number on the mobile phone display. Confirm the control number in the mobile phone and in the vehicle.
- Ignition switched on.

Activating/deactivating Bluetooth link

Bluetooth is not permitted everywhere. Comply with all safety guidelines and regulations.

1. "Telephone"
2. Open "Options".
3. "Bluetooth®"

Activating/deactivating additional functions

To use these functions in the vehicle, activate them before pairing. For information on suitable mobile phones that support this function, refer to page 174.

1. "Telephone"
2. "Bluetooth® (phone)"
3. Open "Options".

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. "Configure Bluetooth®"
5. Select desired additional function.

Bluetooth audio

Use a mobile phone as a telephone and as an audio device in the vehicle.

"Bluetooth® audio"

To use a mobile phone exclusively as a telephone in the vehicle, deactivate the function and reconnect the mobile phone.

Office

Contacts, appointments, tasks, notes, text messages, and e-mails are imported from the mobile phone into the vehicle.

"Office"

Auxiliary phone

Another mobile phone can be used as an auxiliary phone.

"Additional telephone"

Incoming calls to the auxiliary phone can be accepted, refer to page 179. Missed calls to the auxiliary phone are shown in the Control Display.

Pairing and connecting

Only pair the mobile phone when the vehicle is stopped; otherwise, inattention may lead to endangerment of passengers or other road users.◀

1. "Telephone"
2. "Bluetooth® (phone)"
3. "Add new phone"

The Bluetooth name of the vehicle is displayed.

4. To perform other operations on the mobile phone, refer to the Owner's Manual for the mobile phone: e.g. search for and connect Bluetooth device or a new device.

   The Bluetooth name of the vehicle appears on the mobile phone display.
5. Select the Bluetooth name of the vehicle on the mobile phone display.
6. The onboard computer or the mobile phone will prompt you to enter the same Bluetooth passkey.

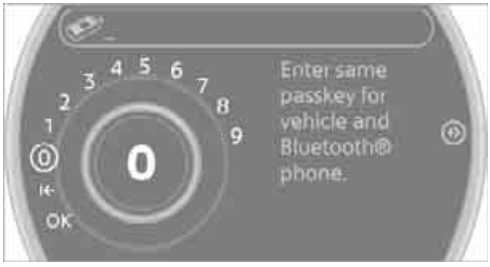

Enter the passkey and confirm.

or

Compare the control number on the vehicle display with the control number on the mobile phone display. Confirm the control number in the mobile phone and in the vehicle.

"OK"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

7. Select the functions that are to be used for the mobile phone.

8. "OK"
9. Move the MINI joystick to the left.

If pairing was successful, the mobile phone appears at the top of the list of mobile phones.

If the pairing was not successful: what to do if…, refer to page 178.

Following the initial pairing

- The mobile phone is detected/connected in the vehicle within a short period of time when the engine is running or radio readiness is switched on.
- After identification, phone book entries are imported from the mobile phone and/or SIM card of the telephone, depending on the telephone.
- Specific settings may be necessary in some mobile phones, e.g. authorization or a secure connection, refer to the Owner's Manual for the mobile phone.

Connecting a particular mobile phone

1. "Telephone"
2. "Bluetooth® (phone)"

   All paired mobile phones are listed.
3. Select the mobile phone to be connected.

The assigned functions before the unpairing of the mobile phone are assigned to the mobile phone when it is reconnected. If a mobile phone is already connected, then these functions are deactivated if necessary.

Device options

Device options in devices that are paired and connected can be activated or deactivated.

Configuring device

1. "Telephone"
2. "Bluetooth® (phone)"
3. Highlight the device to be configured.
4. Open "Options".
5. "Configure phone"

6. Activate/deactivate functions. At least one function must be selected.
   - "Telephone"
   - "Additional telephone"
   - "Audio"
7. "OK"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

If a device is assigned a function, this may deactivate the function in an already connected device and cause the other device to be unpaired.

Exchanging the telephone and auxiliary phone

If the telephone and auxiliary phone are connected to the vehicle, the function can be swapped between the two devices.

1. "Telephone"
2. "Bluetooth® (phone)"
3. "Swap phone/addit. phone"

Using the mobile phone as an audio source

Using the audio-capable mobile phone as an audio source. Activate Bluetooth audio, refer to page 176.

Activate and connect the mobile phone in vehicle, refer to page 176.

The mobile phone is used as an audio source if no other device is connected as an audio source.

If a device is already connected as an audio source:

1. Activate and connect the mobile phone in vehicle, refer to page 176.
2. "Use for audio"

   The mobile phone is connected as an audio source. The previous audio source is no longer connected to the vehicle.

Unpairing device

1. "Telephone"
2. "Bluetooth® (phone)"

   All paired devices are listed.
3. Highlight the device to be unpaired.
4. Open "Options".
5. "Remove phone from list"

What to do if...

For information on suitable mobile phones, refer to page 174.

The mobile phone could not be paired or connected.

- Is Bluetooth activated in the vehicle and in the mobile phone? Activate Bluetooth in the vehicle and in the mobile phone.
- Do the Bluetooth passkeys on the mobile phone and the vehicle match? Enter the same passkey on the mobile phone and via the onboard computer.
- A multi-digit passkey may be required.
- Is the passkey input taking longer than 30 seconds? Repeat the pairing procedure.
- Are too many Bluetooth devices connected to the mobile phone? If so, delete the connections with other devices on the mobile phone.
- Is the audio connection activated? Deactivate the audio connection.
- Is the mobile phone in power economy mode or does it only have a small amount of battery charge remaining? Charge the mobile phone in the snap-in adapter or via a charging cable.
- Depending on the mobile phone, it may only be possible to connect one device to the vehicle. Unpair the connected device from the vehicle and only pair and connect one device.
- Telephone functions not possible.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

- Is the mobile phone paired as an auxiliary phone and is the auxiliary phone function deactivated? Activate the function.
- Outgoing call not possible? Connect the mobile phone as a telephone.

Is the mobile phone no longer responding?

- Switch the mobile phone off and back on again. Repeat the pairing procedure.
- Is the ambient temperature too high or too low? Do not subject your mobile phone to extreme ambient temperatures.

Phone book entries are not displayed, not all of them are displayed, or they are displayed incompletely.

- The transfer of phone book entries has not yet completed.
- It is possible that only the phone book entries of the mobile phone or the SIM card are transferred.
- It may not be possible to display phone book entries with special characters.
- The number of phone book entries to be stored is too high.
- The data volume of the phone book entry is too great, e.g. due to additionally stored information such as notes? Reduce the data volume.
- Is the mobile phone connected as an audio source or auxiliary phone? The mobile phone must be connected as a telephone.

The telephone connection quality is low.

- Depending on the mobile phone, it is possible to adjust the strength of the Bluetooth signal.
- Insert the mobile phone into the snap-in adapter or place it in the vicinity of the center console.
- Adjust the volume of the microphone and speaker separately.

If you have gone through all items in the list and still cannot activate the desired function please contact the Hotline or your MINI dealer.

OPERATION

Adjusting volume

Turn the knob until the desired volume is reached.

The setting is stored for the remote control currently in use.

The vehicle automatically adjusts the volume of the microphone on the mobile phone and the volume of the person on the phone with you. Depending on the mobile phone, it may be necessary to adjust the volumes.

Adjustments are only possible during a call and must be carried out separately for each phone. When the telephone is unpaired, this deletes the settings.

1. "Settings"
2. "Tone"
3. "Volume settings"
4. To select the desired setting: "Microphone" or "Loudspeak."
5. To adjust: turn the MINI joystick.
6. To store: press the MINI joystick.

Incoming call

Receiving calls

If the number of the caller is stored in the phone book and is transmitted by the network, then the name and number of the contact are displayed; otherwise, only the number is displayed.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

If a contact is assigned more than one phone number, then only the name of the caller is transmitted.

With calls to the auxiliary phone, only the number is displayed if it is transmitted by the network.

An incoming call on a phone will be rejected automatically when a call is active on the other phone.

Accepting a call

Press the button on the steering wheel

or

"Accept"

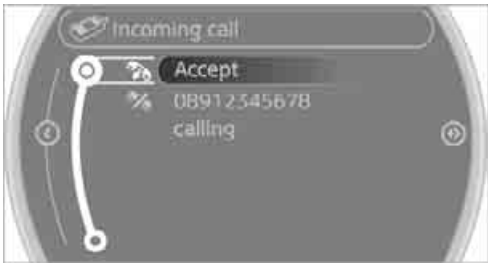

Rejecting a call

"Reject"

The caller is redirected to the mailbox if it has been activated.

Ending a call

Press the button on the steering wheel

or

1. "Telephone"
2. "End call"

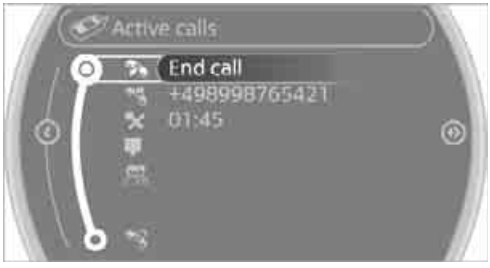

Entering phone numbers

Dialing a number

1. "Telephone"
2. "Dial number"
3. Select the digits individually.
4. Select the symbol.

It is also possible to enter phone numbers by voice.

Calls with multiple parties

General information

It is possible to switch between two calls and to connect two calls to form a conference call. These functions must be supported by the mobile phone and by the service provider.

Accepting a call while speaking to another party

This function may have to be activated by the service provider and the mobile phone may need to be adjusted for this.

When a second call comes in during an ongoing call, a call-waiting signal sounds.

"Accept"

The call is accepted and the existing call is put on hold.

Establishing a second call

Establish another call during an active call.

1. "Telephone"
2. "Active calls"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

3. "Hold"
   The existing call is put on hold.

4. Dial the new phone number or select it from a list.

Switching between two calls, toggling

Active call: highlighted.

The call on hold is identified with: "on hold...".

Select the symbol to switch to the call on hold.

Establishing a conference call

Two calls can be connected to a single telephone conference call.

1. Establish two calls.
2. "Conference call"

Both calls are always ended when a conference call is terminated. If one call is terminated by another party, the other call can be continued.

Muting the microphone

The microphone can be muted in active calls.

1. "Telephone"
2. "Active calls"
3. "Microphone mute"

The muted microphone is automatically activated:

- If a new call is made.
- When switching between callers on hold.

Keypad dialing

Use keypad dialing to gain access to network services or to control devices, e.g. to remotely access an answering machine. This requires the DTMF code.

1. "Telephone"
2. Select contact from a list or "Dial number"
3. "Keypad dialing"

4. Enter the DTMF code via the onboard computer.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Phone book

Displays

The phone book accesses the contacts of the telephone and shows all contacts for which a phone number is entered. The entries can be selected to make a call.

1. "Telephone"
2. "Phone book"

A symbol indicates the storage location of the contacts, refer to page 188.

Calling a contact

1. Select the desired contact.

   Select the symbol. Contact with one phone number. The connection is established.
2. Select the symbol. Contact with more than one phone number. Select phone number, the connection is established.

Call not possible, the mobile phone has no reception or network.

Editing a contact

Changing entries in the "Contacts" menu. If a contact is changed, the changes are not stored in the mobile phone. A copy of the entry is stored in the vehicle.

1. Highlight the contact.
2. Open "Options".
3. "Edit entry"

The contact can be edited.

Redialing

General information

The list of dialed numbers in the telephone are transferred to the vehicle, depending on the mobile phone. The last 20 phone numbers dialed are displayed. The sorting of the phone numbers depends on the mobile phone.

Selecting the number using the onboard computer

1. "Telephone"
2. "Redial"

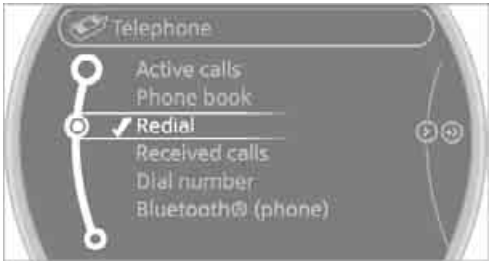

3. Select the desired entry and phone number, if necessary.

The connection is established.

Deleting a single entry or all entries

Deleting entries depends upon the mobile phone.

1. Highlight the entry.
2. Open "Options".
3. "Delete entry" or "Delete list".

Saving an entry in the contacts

1. Highlight the entry.
2. Open "Options".
3. "Store as new contact" or "Add to existing contact".
4. Select the type of number: "Home", "Business", "Mobile" or "Other".
5. Complete the entries if necessary.
6. "Store contact" if necessary

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Received calls

Displaying calls

The list of received calls in the telephone is transferred into the vehicle, depending on the mobile phone. The last 20 calls received are displayed. The sorting and displaying of phone numbers depends on the mobile phone.

1. "Telephone"
2. "Received calls"

Calling a number from the list

Select an entry.
The connection is established.

Deleting a single entry or all entries

Deleting entries depends upon the mobile phone.

1. Highlight the entry.
2. Open "Options".
3. "Delete entry" or "Delete list".

Saving an entry in the contacts

1. Highlight the entry.
2. Open "Options".
3. "Store as new contact" or "Add to existing contact".
4. Select the type of number: "Home", "Business", "Mobile" or "Other".
5. Complete the entries if necessary.
6. "Store contact" if necessary

Hands-free system

General information

Calls being conducted using the hands-free system can be continued using the mobile phone and vice versa.

From the mobile phone to the hands-free system

Calls that have been initiated from outside the Bluetooth range of the vehicle can be continued using the hands-free system if the ignition is switched on.

Depending on the mobile phone, the call is automatically switched to hands-free mode.

If the switch does not occur automatically, then follow the instructions that appear on the display of the mobile phone, also refer to the Owner's Manual for the mobile phone.

From hands-free system to mobile phone

Calls being conducted using the hands-free system can also be continued using the mobile phone if so desired, depending on the mobile phone.

At this point, follow the instructions that appear on the display of the mobile phone, also refer to the Owner's Manual for the mobile phone.

OPERATION BY VOICE

Equipped with voice activation system: operation, refer to page 21. For the list with the short commands, refer to page 252, does not apply for this type of voice operation.

Equipped without voice activation system: depending upon the equipment, the mobile phone can be voice-operated as described below.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

The concept

- The mobile phone can be operated without removing your hand from the steering wheel.
- In many cases, the entry process is supported by means of announcements or questions.
- ›...‹ Verbal instructions to use with the voice operation system.
- ››...‹‹ Identifies the answers generated by the voice operation system.

Voice commands

Activating voice activation system

1. Briefly press the button on the steering wheel.
2. Say the command.

Finishing voice input

Press the button on the steering wheel briefly
or

›Cancel‹.

Possible commands

Having possible commands read aloud

Press the button on the steering wheel.

›Help‹.

Possible commands are read aloud.

Each digit can be spoken individually or combined into a sequence to accelerate the entry process.

Using alternative commands

There are often a number of commands to run a function, e.g.:

›Dial name‹ or ›Name‹.

Example: dialing phone numbers

1. Briefly press the button on the steering wheel.
2. ›Dial number‹
3. The system replies: ››Please say the number.‹‹
4. For example: ›123 456 7890‹
5. The system replies: ››123 456 7890. Continue?‹‹
6. ›Dial‹
   System replies: ››Dialing number.‹‹

Calling

Dialing phone numbers

1. ›Dial number‹.
2. Say the phone number.
3. ›Dial‹.

The connection to the desired subscriber is established.

Correcting phone number

Digit sequences can be deleted after the system has repeated the digits.

›Correct number‹.

The command can be repeated as often as necessary.

Deleting phone number

›Delete‹.

All digits entered up to this point are deleted.

Redialing

›Redial‹.

Voice phone book

Depending on how your vehicle is equipped, it may be necessary to create your own voice phone book.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

The entries must be entered by voice and are independent of the mobile phone's memory. Up to 50 entries can be set up.

Storing the entry

1. ›Save name‹.
2. Say the name aloud. Do not exceed a speaking duration of about 2 seconds.
3. Say the phone number after being prompted to do so by the system.
4. ›Save‹.

Deleting the entry

1. ›Delete name‹.
2. Say the name when prompted.
3. Confirm prompt with ›Yes‹.

Deleting all entries

1. ›Delete phonebook‹.
   The dialog for deleting phone book is opened.
2. Confirm prompt with ›Yes‹.
3. Confirm repeated prompt with ›Yes‹.

Reading and selecting the entries

1. ›Read phonebook‹.
   The dialog for reading phone book is opened.
2. ›Dial number‹ when the desired entry is read aloud.

Selecting an entry

1. ›Dial name‹.
2. Say the name when prompted.
3. Confirm prompt with ›Yes‹.

Adjusting volume

Turn knob during announcement.

- The volume remains the same, even if the volume of other audio sources is changed.
- The volume is stored for the remote control currently in use.

Notes

Do not use the voice operation system to initiate an emergency call. In stressful situations, the voice and vocal pitch can change. This can unnecessarily delay the establishment of a telephone connection.

Ambient conditions

- Say the commands, numbers and letters smoothly and with normal volume, emphasis and speed.
- Always say the commands in the language of the system. The language for voice operation system is preset and can not be changed via the Control Display.
- Keep doors, windows, glass sunroof/panoramic sunroof, or convertible top closed to avoid noise interference.
- Avoid ambient noise in the vehicle while speaking.

SNAP-IN ADAPTER

The concept

The snap-in adapter makes it possible to do the following:

- Accommodate the mobile phone.
- Recharge its battery.
- Connect to the outside antenna of the vehicle.

This assures a better network connection and constant sound quality.

General information

Detailed information on snap-in adapters that compatibly support mobile phone functions can be found at your MINI dealer.

Do not expose your mobile phone to extreme ambient conditions, for example, very high temperatures; otherwise, functions on your mobile phone may not work. Follow the operating instructions for your mobile phone.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Installation location

In the center armrest.

Inserting snap-in adapter

1. Press the button and remove the cover.

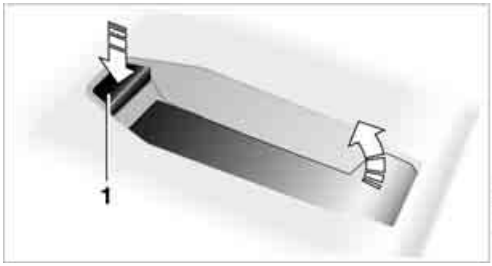

2. Insert the snap-in adapter at the front, arrow **1**, and press downward, arrow **2**, until it clicks into place.

Inserting mobile phone

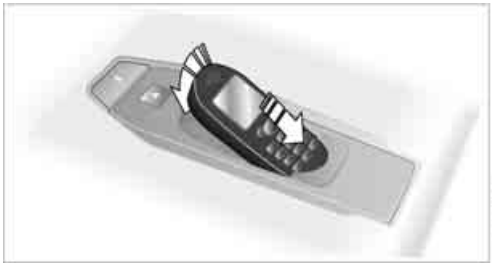

1. Depending on the mobile phone, it may be necessary to remove the protective cap of the antenna connector and from the USB connection of the mobile phone.
2. Push the mobile phone with the buttons facing upward toward the electrical connections and press down until it engages.

Removing mobile phone

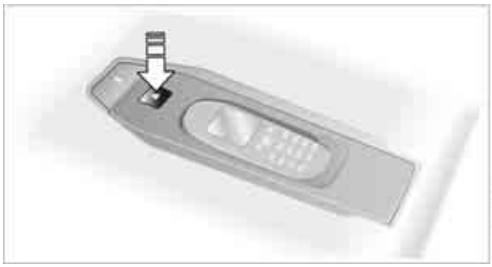

Press the button and remove the mobile phone.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

OFFICE

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

OVERVIEW

General information

Contacts, appointments, tasks, notes, text messages and mobile phone e-mails can be displayed using the Control Display if the mobile phone compatibly supports these functions and the required Bluetooth radio standards.

For information about which mobile phones and functions are available, go to www.mini.com/connectivity.

A limited number of compatible mobile phones are available for Office.

Contents are only displayed completely when the vehicle is stopped.

Only read access to the mobile phone is possible.

Do not use Office while driving. Make entries only when traffic and road conditions permit; otherwise, you may endanger vehicle occupants and other road users by being distracted.◀

Requirements

▷ A suitable mobile phone is paired with the vehicle and connected. In some mobile phones, the data access to the mobile phone must be confirmed.

▷ Time zones, time, and date, refer to page 66, are correctly adjusted on the Control Display and on the mobile phone in order, for example, to correctly display appointments.

Updating

Every time that the mobile phone is connected to the vehicle, data are updated. Appointments, tasks, notes and reminders can be updated separately.

1. "Office"
2. "Current office", "Calendar", "Tasks", "Notes" or "Reminders"
3. Open "Options".
4. "Update data"

   Data from the mobile phone are again transferred to the vehicle.

CURRENT OFFICE

The number of unread messages and active tasks as well as upcoming appointments are displayed.

1. "Office"
2. "Current office"
3. Select the desired entry to display details.

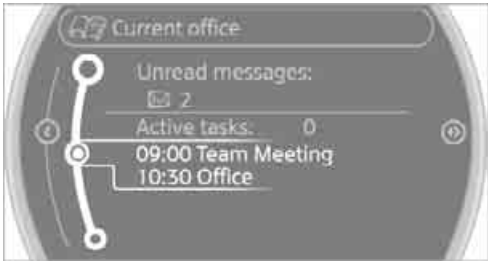

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CONTACTS

General information

Contacts can be created and edited. The contacts from the mobile phone are displayed as well if this function is supported by the mobile phone. The addresses can be used as destinations for navigation and the phone numbers can be dialed.

Displaying contacts

1. "Office"
2. "Contacts"

All contacts are listed in alphabetical order. Depending on the number of contacts, an A-Z search is offered.

A symbol indicates the storage location of the contacts:

Symbol	Storage location
No symbol	In the vehicle; the address has not been checked as a destination.
	In the vehicle; the address has been checked as a destination.
	Mobile phone

Dialing phone numbers

1. Select the desired contact.
2. Select phone number.

The connection is established.

Editing a contact

1. Select the desired contact.
2. "Edit contact"

3. Change the entry.
4. "Store contact in vehicle"

If a contact is changed, the changes are not stored in the mobile phone. A copy of the entry is stored in the vehicle, and only this copy is displayed.

Selecting a contact as a destination

1. Select the desired contact.
2. Select address.

   With contacts from the mobile phone, the address must be compared with the navigation data stored in the vehicle. In this case:

   Correct the address.

3. "Start guidance" or "Add as another destination"

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Checking the address as a destination

An address that is to be used in route guidance must correspond to the navigation data stored in the vehicle. The address can be checked to ensure this.

1. Select the desired contact and highlight the address.
2. Open "Options".
3. "Check as destination"
4. Correct and store the address, if necessary.

If the address is corrected and stored, a copy of it is stored in the vehicle. The address is not changed on the mobile phone.

New contact

A contact can be associated with up to 8 phone numbers, 2 addresses, 3 e-mail addresses, and one Internet address.

1. "Office"
2. "Contacts"
3. Open "Options".
4. "New contact"

5. If input boxes are already filled with previous entries: "Delete input fields"
6. To fill in the entry fields: select the symbol next to the entry field.
7. Enter text and assign a contact type, refer to page 189.
8. When equipped with a navigation system: enter address. It is only possible to enter addresses that are contained in the navigation data stored in the vehicle. This ensures that route guidance is possible for all addresses.
9. "Accept address" if necessary
10. "Store contact in vehicle"

Contact types

Phone numbers and addresses can be assigned various contact types.

Symbol	Meaning
	Private phone number
	Business phone number
	Mobile phone number
	Other phone number
	Private address
	Business address

Defining a home address

It is possible to store a home address. It is listed at the beginning of the contacts.

1. "Home"
2. Create a contact.
3. "Store contact in vehicle"

Selecting name sorting

Names can be displayed in different orders.

1. "Office"
2. "Contacts"
3. Open "Options".
4. "Display: last, first name" or "Display: first, last name"

Depending on how the contacts were stored in the mobile phone, the sorting of names can differ from the sorting selected.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Displaying contact pictures

Pictures stored with contacts are stored in the vehicle when the mobile phone is connected to the vehicle. The number of pictures transmitted depends on the mobile phone. The mobile phone must support this function.

1. "Office"
2. "Contacts"
3. Open "Options".
4. "Configure Bluetooth®"
5. "Show images"

The display of all contact pictures is activated or deactivated.

Deleting contacts

Only contacts that are stored in the vehicle are deleted. The contacts on the mobile phone cannot be deleted.

1. "Office"
2. "Contacts"
3. Highlight the contact.
4. "Options"
5. "Delete contact" or "Delete all contacts".

MESSAGES

General information

The displaying of text messages and e-mails depends on whether the mobile phone supports transmission to the vehicle. Text messages and e-mails may not be supported by the service provider or the function may have to be separately activated. After a mobile phone is paired for the first time, the transmission may take several minutes. Messages are only displayed completely when the vehicle is stopped. Messages from the auxiliary phone are not transmitted.

Displaying messages

1. "Office"
2. "Messages"

Message type

A symbol indicates the type of message.

Read message.

Unread message.

Symbol	Message type
	Text message
	E-mail from mobile phone

Filtering message lists

A message list can be filtered if there is more than one message type.

1. "Filter:"
2. Select message type.
   - ▷ "All"
     All messages are displayed.
   - ▷ "Text message"
     Only text messages from mobile phones are displayed.
   - ▷ "E-mail"
     Only text messages from mobile phones are displayed.

Text message

Calling a text message sender

1. Select the desired message.
2. Select the symbol.

Saving sender in the contacts

1. Highlight the desired message.
2. Open "Options".
3. "Store as new contact" or "Add to existing contact"

Using contact data

Contact data from deadlines, tasks, text messages, e-mails and notes can be stored or selected, see page 193.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Reading text messages aloud

Reading text messages aloud, refer to page 193.

E-mail

Displaying e-mail

1. "Office"
2. "Messages"
3. Select the desired message.

Displaying e-mail contacts

If the sender and receiver of an e-mail were transmitted from a mobile phone, they will be displayed in the e-mail.

"Sender/Recipient"

If the e-mail address is stored in the contacts, then the contact is displayed. Select contact to display details.

If the e-mail address is not stored in the contacts, then it may be that only the e-mail address is displayed.

Using contact data

Contact data from deadlines, tasks, text messages, e-mails and notes can be stored or selected, see page 193.

Deactivating entire display

When opening an e-mail when in the vehicle, it is completely transferred to the vehicle. This may result in charges.

1. "Office"
2. "Messages"
3. Open "Options".
4. "Fully download e-mails"

   Only a part of an e-mail from a mobile phone is loaded into the vehicle.

Reading e-mail

Reading e-mail, see page 193.

CALENDAR

Displaying calendar

Appointments from the last 20 days and the next 50 days can be displayed.

1. "Office"
2. "Calendar"

   Appointments of the current day are displayed.

Selecting calendar day

1. Select date.

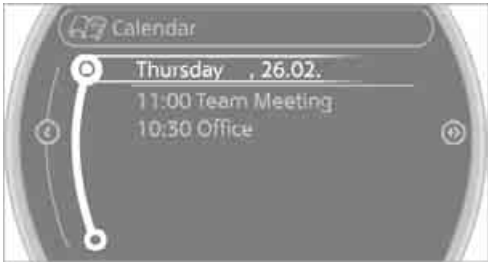

2. Select desired day or date.
   - ▷ "Next day"
   - ▷ "Date:"
   - ▷ "Previous day"
   - ▷ "Today"

Displaying appointment

1. Select the desired appointment.
2. To scroll through appointment, if necessary:
   - ▷ Turn the MINI joystick.
   - ▷ Select the symbol.

Using contact data

Contact data from deadlines, tasks, text messages, e-mails and notes can be stored or selected, see page 193.

Reading an appointment aloud

Reading an appointment aloud, refer to page 193.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

TASKS

Displaying task list

Display open tasks that must be completed within the next 90 days.

1. "Office"
2. "Tasks"

Sorting task list

1. Select the top line in the task list.

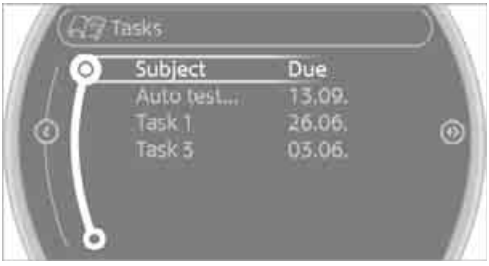

2. To select sorting criterion:
   - ▷ "Priority (!)"
   - ▷ "Subject"
   - ▷ "Due date"

Displaying task

1. Select the desired task.
2. To scroll through the task, if necessary:
   - ▷ Turn the MINI joystick.
   - ▷ Select the symbol.

Using contact data

Contact data from deadlines, tasks, text messages, e-mails and notes can be stored or selected, see page 193.

Reading a task aloud

Reading a task aloud, refer to page 193.

NOTES

Displaying notes

1. "Office"
2. "Notes"

   All notes are displayed.

Displaying a note

1. Select the desired note.

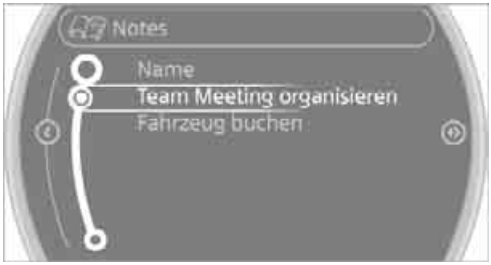

2. To scroll through the note, if necessary:
   - ▷ Turn the MINI joystick.
   - ▷ Select the symbol.

Using contact data

Contact data from deadlines, tasks, text messages, e-mails and notes can be stored or selected, see page 193.

Reading a note aloud

Reading a note aloud, refer to page 193.

REMINDERS

Displaying reminders

Reminders for imminent appointments and tasks are displayed. After an appointment has passed or a task is due, the reminder is deleted.

1. "Office"
2. "Reminders"
3. Select the desired reminder.

The associated appointment or task is displayed.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

USING CONTACT DATA

Overview

Contact data from deadlines, tasks, text messages, e-mails and notes can be stored or selected.

Displaying a contact or dialing a phone number

1. "Use contact data"

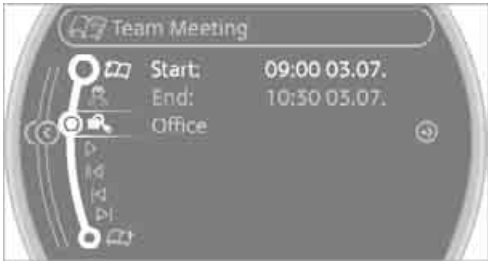

2. To display a contact or dial a phone number:
   - Select a contact to display a detailed view of the contact.
   - Select a phone number to directly establish a connection.

Storing contact data

1. "Use contact data"
2. Highlight a phone number or e-mail address.
3. Open "Options".
4. "Add to existing contact" or "Store as new contact"

READING ALOUD

Text messages, e-mails, appointment entries, tasks, and notes can be read aloud to you.

1. Select the desired message, appointment, task, or note.
2. Select the ▷ symbol.

While the message is being read aloud, you have the following options:

- ❙❙ "Pause"

  Interrupt the reading. Select again to resume the reading.
- ⏮ "Back to beginning"

  Read message again from the beginning.
- Select the ⏪ symbol.

  Skip back one paragraph.
- Select the ⏩ symbol.

  Skip over a paragraph.
- To terminate the reading, move the MINI joystick to the left.

WHAT TO DO IF...

For information on suitable mobile phones, refer to page 174.

- Appointments, tasks, notes, or text messages are not being displayed?

  The mobile phone is not suitable for the missing function or is not correctly connected.

  The mobile phone is connected as an auxiliary phone.

  The Office function is deactivated.

  The appointments are older than 20 days and are more than 50 days in the future.

  The tasks have been marked as completed or are more than 90 days in the future.

  Depending on the number of appointments, tasks, notes, and messages stored in the mobile phone, not all of them are displayed in the vehicle.
- Appointments or tasks from the mobile phone are not being displayed at the correct time?

  The time zone, time, or date is incorrectly set in the Control Display and in the mobile phone.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

- Texts of entries are not displayed completely?

  Texts are already shortened by the mobile phone.

  Synchronization between the mobile phone and vehicle can take a few minutes.
- Contact pictures are not being displayed?

  Up to max. 200 contact pictures can be stored in the vehicle.
- If you have gone through all items in the list and still cannot activate the desired function please contact the Hotline or your MINI dealer.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI CONNECTED

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

OVERVIEW

The concept

You can use MINI Connected to integrate certain software applications of a suitable mobile phone into your MINI. These software applications are displayed on the Control Display. They are operated using the MINI joystick.

The range of software applications can be country-specific.

Requirements

The following requirements must be met for the function of MINI Connected:

- The operating system of the mobile phone must support the software applications of MINI Connected.
- The software applications are installed on the mobile phone and are operational.
- Suitable mobile phone.
- Appropriate mobile phone contract.

  Possible additional costs incurred are not included with MINI Connected.

Only make entries when the traffic situation allows you to do so. If you do not observe this precaution, your being distracted can endanger vehicle occupants and other road users.

For safety reasons, some software applications can only be used when the vehicle is stopped.◀

Only use software applications approved by the manufacturer of your MINI; otherwise, malfunctions may result.◀

Notes

For information on suitable mobile phones, available software applications, and their installation:

- At: www.mini.com/connectivity
- At your MINI dealer.

CONNECTING A MOBILE PHONE

Connecting via the USB audio interface

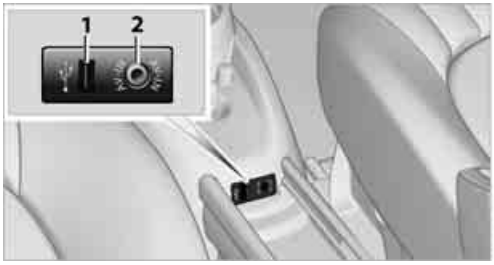

1 USB interface

2 Connection for audio/video playback: TRS connector 1/8"/3.5 mm

Connect the mobile phone using the special connecting cable, available at your MINI dealer, to the USB interface **1** and the AV-IN connection **2**.

To perform other operations on the mobile phone, refer to the Owner's Manual for the mobile phone: e.g. selecting and activating a software application.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Connecting via the snap-in adapter

The mobile phone can also be connected using the snap-in adapter, refer to page 185.

USING MINI CONNECTED

After successful connection of the mobile phone to the vehicle and activation of MINI Connected, the applications are displayed on the Control Display and can be operated using the MINI joystick.
Volume adjustments can be made using the buttons on the steering wheel, refer to page 10, or using the volume control knob on the radio, refer to page 141.

1. Press the button.
   This opens the main menu.
2. "MINI Connected"

3. Select the desired software application.

The extent of MINI Connected that is shown on the Control Display depends on the range of installed software applications on the mobile phone.

The data transfer of the software application from the telephone to the vehicle can take a few minutes. Some software applications depend on the speed of the available Internet connection for the mobile phone.◀

Certain versions of mobile phones used and their software can make it impossible to use MINI Connected and the Bluetooth hands-free system at the same time.
After a phone call, it may be necessary to restart the software application on the mobile phone.

PlugIn

Selected functions for a compatible Apple device are shown on the Control Display via a video link. Operation is via the MINI joystick and an onboard monitor.

1. Connecting an Apple device.
   - via a USB audio interface, refer to page 195.
   - via the snap-in adapter, refer to page 185.
2. "MINI Connected"
3. "PlugIn"
4. Select the type of connection: "Activate via AUX connection" or "Activate via Snap-In adapter"
5. "Activate PlugIn"
6. Navigate among the functions shown via a MINI joystick and, e.g., select a desired category or track.

Press the button to return back or to change to a level higher within the functions of the Apple device.

Press the button twice to return back to the main menu.

Additional information can be found in the MINI Connected Owner's Manual at www.mini.com/connectivity.

Note

Audio and video playback from a snap-in adapter may only be possible if there is no cable connected to the AV-In port.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MOVE ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

REFUELING

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

GENERAL INFORMATION

Switch off the engine before refueling; otherwise, fuel cannot be added to the tank and a message will be displayed.◀

Take all precautionary measures and observe all applicable regulations when handling fuel. Do not carry any spare fuel containers in your vehicle. They can develop a leak and cause an explosion or cause a fire in the event of an accident.◀

FUEL FILLER FLAP

Opening

MINI Countryman:

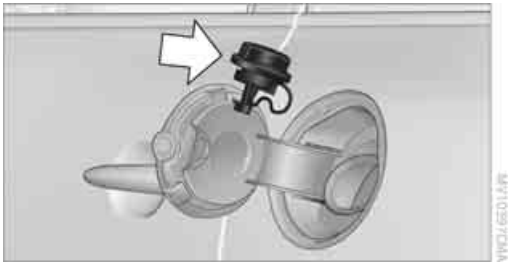

MINI Paceman:

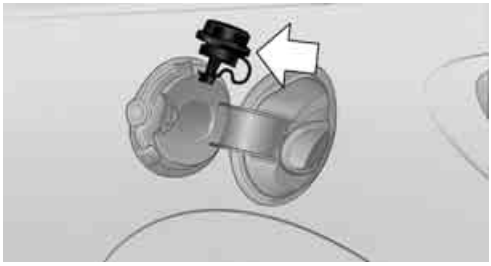

1. Open the fuel filler flap.
2. Turn the fuel cap counterclockwise.
3. Place the fuel cap in the bracket attached to the fuel filler flap.

Closing

Fit the cap and turn it clockwise until you clearly hear a click.

Do not pinch the band attached to the cap; otherwise, the cap cannot be closed properly and fuel vapors can escape. A message will be displayed if the fuel cap is loose or missing.◀

Manually releasing the fuel filler flap

In the event of an electrical malfunction, you can manually release the fuel filler flap:

MINI Countryman:

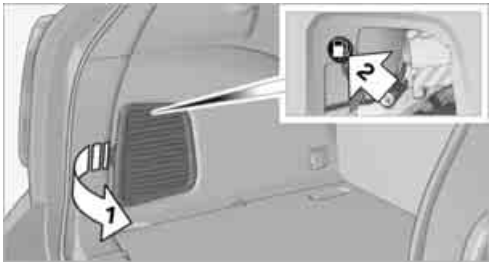

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Paceman:

1. Open cargo area trim panel, arrow **1**.
2. Pull on the green knob with the fuel pump symbol.

   The fuel filler flap opens.

Observe the following when refueling

Take all precautionary measures and observe all applicable regulations when handling fuel; otherwise, there is a danger of personal injury and property damage.◀

When refueling, insert the filler nozzle completely into the filler pipe. Avoid lifting the filler nozzle while filling the tank, as that would lead to

- premature pump shutoff
- reduced efficiency of the fuel-vapor recovery system.

The fuel tank is full when you top off twice after the first time that the fuel pump nozzle clicks off.

Do not overfill the fuel tank; otherwise, overflowing fuel can cause damage to the environment and the vehicle.◀

Fuel tank capacity

If the range displayed is less than 30 miles/50 km, be sure to refuel; otherwise, engine functions are not guaranteed and damage may occur.◀

Approx. 12.3 US gal/47 liters, including the reserve capacity of 2.1 US gal/8 liters.

If the engine can no longer be started because of an empty fuel tank, add at least 1.3 US gal/5 liters of fuel. If the vehicle is at an angle, a larger amount of fuel may be necessary.

FUEL SPECIFICATIONS

Gasoline

For optimum fuel efficiency, the gasoline should be free of sulfur or as low in sulfur as possible.

Fuels that are labeled at the pump as containing metal may not be used.

Do not fill the tank with leaded gasoline or gasoline that contains metal additives, such as manganese or iron; otherwise, long term damage to the catalytic converter or other components may result.◀

Fuels with a maximum ethanol content of up to 10 %, that is, E10, can be used.

The ethanol should meet the following quality standards:

US: ASTM 4806-xx

CAN: CGSB-3.511-xx

xx: Always observe currently valid standards.

Do not fill the tank with E85, i.e. fuel containing 85 % ethanol, nor with FlexFuel. Otherwise, the engine and fuel supply system will be damaged.◀

The engine is knocking regulated. Therefore, different grades of gasoline can be used for refueling.

Recommended gasoline grades

The manufacturer of your MINI recommends:

- AKI 91.
- John Cooper Works: AKI 93.

Minimum quality

The manufacturer of your MINI recommends AKI 89.

Do not use any gasoline below the specified minimum fuel grade. Otherwise, the engine could be damaged.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

If you use gasoline with this minimum AKI rating, the engine may produce knocking sounds when starting at high external temperatures. This has no effect on the engine life.

The use of poor quality fuels may result in harmful engine deposits or damage. Additionally, problems relating to drivability, starting and stalling, especially under certain environmental conditions such as high ambient temperatures and high altitudes, may occur.

If drivability problems are encountered, we recommend switching to a high quality gasoline brand and a higher octane grade - AKI number - for a few tankfuls. To avoid harmful engine deposits, it is highly recommended to purchase gasoline from BP or Top Tier retailers.

Failure to comply with these recommendations may result in a need for unscheduled maintenance.◀

MINI recommends BP fuels

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

WHEELS AND TIRES

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

TIRE INFLATION PRESSURES

Information for your safety

It is not merely the tires' service life, but also driving comfort and, to a great extent, driving safety that depend on the condition of the tires and the maintenance of the specified tire pressure.

Checking pressure

Check the tire inflation pressure regularly and correct it, if necessary: at least twice a month and before starting long trips. If you fail to observe this precaution you may be driving on tires with incorrect tire pressures, a condition that can not only compromise your vehicle's driving stability, but also lead to tire damage and the risk of an accident. Do not drive with deflated, i.e. flat tires, except when using run-flat tires. A flat tire will seriously impair your vehicle's handling and braking response. Attempts to drive on a flat tire can lead to loss of control over the vehicle.◀

Check the tire inflation pressures only on cold tires. This means after a maximum of 1.25 miles/ 2 km driving or when the vehicle has been parked for at least 2 hours. When tires are warm, the tire inflation pressure is higher.

After adjusting the tire inflation pressure, reinitialize the Flat Tire Monitor, page 75, or reset the Tire Pressure Monitor, page 78.◀

Pressure specifications

The tables below provide all the correct inflation pressures for the specified tire sizes at ambient temperature.

The tire inflation pressures apply to the tire sizes approved and the tire brands recommended by the manufacturer of your MINI. Your MINI dealer will be glad to advise you.◀

For correct identification of the right tire inflation pressures, observe the following:

- Tire sizes for your vehicle
- Maximum allowable driving speed

Tire inflation pressures for driving up to 100 mph or 160 km/h

For normal driving up to 100 mph or 160 km/h and to achieve optimum driving comfort, adjust pressures to the respective tire inflation pressures listed on the following pages in the columns for traveling speeds up to a maximum of 100 mph or 160 km/h.

These tire inflation pressures can also be found on the driver's side door pillar when the driver's door is open.

MINI Countryman:

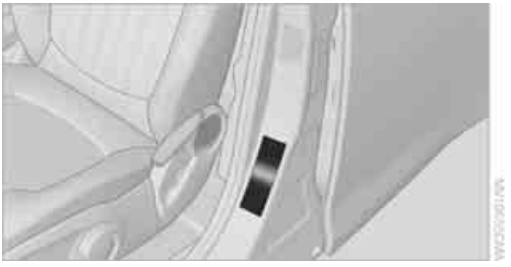

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Paceman:

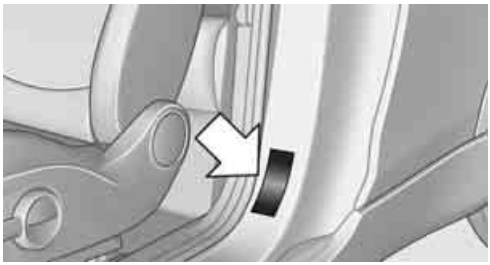

The maximum permitted speed for these tire inflation pressures is 100 mph or 160 km/h. Do not exceed this speed; otherwise, tire damage and accidents may occur.◀

Tire inflation pressures for driving above 100 mph or 160 km/h

In order to drive at maximum speeds in excess of 100 mph or 160 km/h, adjust pressures to the respective tire inflation pressures listed on the following pages in the columns for traveling speeds including those exceeding 100 mph or 160 km/h. Otherwise, tire damage and accidents could occur.◀

Observe all national and local maximum speed limits; otherwise, violations of the law could occur.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Tire inflation pressures MINI Cooper Countryman

Tire size	Tire pressures in bar/psi			
	Speeds up to a max. of 100 mph / 160 km/h		Speeds including those exceeding 100 mph / 160 km/h	
All pressure specifications in the table are indicated in bar/psi for cold tires. Cold = ambient temperature				
195/60 R 16 89 H M+S Std 205/55 R 17 91 H M+S RSC 205/55 R 17 91 H M+S A/S RSC 205/55 R 17 91 V RSC 225/45 R 18 91 V RSC 225/40 R 19 89 V RSC	2.2/32	2.2/32	2.4/35	2.4/35

More details on the permissible load and weights can be found on page 248.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Tire inflation pressures MINI Cooper S Countryman / Cooper S ALL4 Countryman

Tire size	Tire pressures in bar/psi			
	Speeds up to a max. of 100 mph / 160 km/h		Speeds including those exceeding 100 mph / 160 km/h	
All pressure specifications in the table are indicated in bar/psi for cold tires. Cold = ambient temperature				
195/60 R 16 89 H M+S Std 205/55 R 17 91 H M+S RSC 205/55 R 17 91 H M+S A/S RSC 205/55 R 17 91 V RSC 225/45 R 18 91 V RSC 225/40 R 19 89 V RSC	2.2/32	2.2/32	2.6/38	2.6/38

More details on the permissible load and weights can be found on page 248.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Countryman John Cooper Works tire inflation pressures

Tire size	Tire pressures in bar/psi			
	Speeds up to a max. of 100 mph / 160 km/h		Speeds including those exceeding 100 mph / 160 km/h	
All pressure specifications in the table are indicated in bar/psi for cold tires. Cold = ambient temperature				
195/60 R 16 89 H M+S Std 205/55 R 17 91 H M+S RSC 205/55 R 17 91 H M+S A/S RSC 225/45 R 18 91 V RSC 225/40 R 19 89 V RSC	2.4/35	2.4/35	2.6/38	2.6/38

More details on the permissible load and weights can be found on page 248.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Tire inflation pressures for MINI Paceman Cooper

Tire size	Tire pressures in bar/psi			
	Speeds up to a max. of 100 mph / 160 km/h		Speeds including those exceeding 100 mph / 160 km/h	
All pressure specifications in the table are indicated in bar/psi for cold tires. Cold = ambient temperature				
195/60 R 16 89 H M+S Std 205/55 R 17 91 H M+S RSC 205/55 R 17 91 H M+S A/S RSC 205/55 R 17 91 V RSC 225/45 R 18 91 V RSC 225/40 R 19 89 V RSC	2.2/32	2.2/32	2.4/35	2.4/35

More details on the permissible load and weights can be found on page 248.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Tire inflation pressures for MINI Paceman Cooper S / Paceman Cooper S ALL4

Tire size	Tire pressures in bar/psi			
	Speeds up to a max. of 100 mph / 160 km/h		Speeds including those exceeding 100 mph / 160 km/h	
All pressure specifications in the table are indicated in bar/psi for cold tires. Cold = ambient temperature				
195/60 R 16 89 H M+S Std 205/55 R 17 91 H M+S RSC 205/55 R 17 91 H M+S A/S RSC 205/55 R 17 91 V RSC 225/45 R 18 91 V RSC 225/40 R 19 89 V RSC	2.2/32	2.2/32	2.6/38	2.6/38

More details on the permissible load and weights can be found on page 248.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

TIRE IDENTIFICATION MARKS

Knowledge of the labeling on the side of the tire makes it easier to identify and choose the right tires.

Tire size

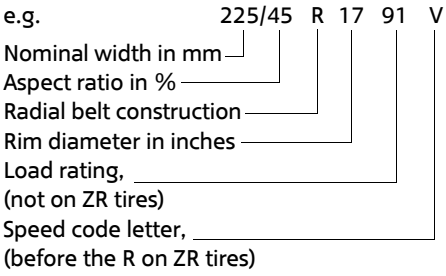

Speed letter

Q = up to 100 mph/160 km/h

T = up to 118 mph/190 km/h

H = up to 131 mph/210 km/h

V = up to 150 mph/240 km/h

W = up to 167 mph/270 km/h

Y = up to 186 mph/300 km/h

Tire Identification Number

Tires with DOT codes meet the guidelines of the US Department of Transportation.

DOT code:

Uniform Tire Quality Grading

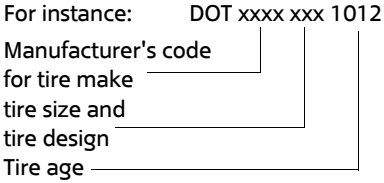

Quality grades can be found where applicable on the tire sidewall between tread shoulder and maximum section width. For example:

Tread wear 200 Traction AA
Temperature A

DOT Quality Grades

Tread wear
Traction AA A B C
Temperature A B C

All passenger car tires must conform to Federal Safety Requirements in addition to these grades.◀

Tread wear

The tread wear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 150 would wear one and one-half (1 ½) times as well on the government course as a tire graded 100. The relative performance of tires depends upon the actual conditions of their use, however, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

Traction

The traction grades, from highest to lowest, are AA, A, B, and C.
These grades represent the tire's ability to stop on wet pavement, as measured under controlled conditions on specified government test surfaces of asphalt and concrete. A tire marked C may have poor traction performance.

The traction grade assigned to this tire is based on straight-ahead braking traction tests, and does not include acceleration, cornering, hydroplaning, or peak traction characteristics.◀

Temperature

The temperature grades are A, the highest, B, and C, representing the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

failure. The grade C corresponds to a level of performance which all passenger car tires must meet under the Federal Motor Vehicle Safety Standard No. 109. Grades B and A represent levels of performance on the laboratory test wheel that exceed the minimum required by law.

The temperature grade for this tire is established for a tire that is properly inflated and not overloaded. Excessive speed, underinflation, or excessive loading, either separately or in combination, can cause heat buildup and possible tire failure.◀

RSC - run-flat tires

You will recognize run-flat tires by a circular symbol containing the letters RSC on the side of the tire, page 212.

M+S

Winter and all-season tires.
These have better winter properties than summer tires.

XL

Designation for specially reinforced tires.

TIRE CONDITION

Inspect your tires regularly for tread wear, signs of damage and for foreign objects lodged in the tread. Check the tread depth.

Tread depth

The tread depth should not drop below 0.12 in/3 mm, although, for example, European legislation only specifies a minimum tread depth of 0.063 in/1.6 mm. At tread depths below 0.12 in/3 mm there is an increased risk of high-speed hydroplaning, even when only small amounts of water are present on the road surface.

Winter tires

When winter tires wear down past a tread depth of 0.16 in/4 mm, they become perceptibly less suitable for winter conditions. In the interest of safety, new tires should be installed.

Minimum tread depth

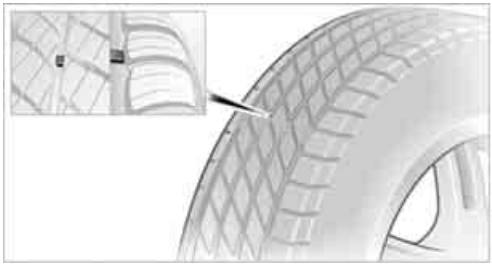

Wear indicators in the base of the tread groove are distributed around the tire's circumference; the letters TWI, for Tread Wear Indicator, on the tire's sidewalls identify tires that incorporate these wear indicators. If the tire tread has been driven down to the wear indicators, a tread depth of 0.063 in/1.6 mm has been reached.

Tire damage

Driving over rough or damaged road surfaces, as well as debris, curbs, and other obstacles can cause serious damage to wheels, tires, and suspension parts. This is more likely to occur with low-profile tires, which provide less cushioning between the wheel and the road. Be careful to avoid road hazards and reduce your speed, especially if your vehicle is equipped with low-profile tires.

Unusual vibrations encountered during normal vehicle operation can indicate tire failure or some other vehicle defect. This can, for example, be caused by driving over curbs. The same applies to any other abnormal road behavior, such as pulling severely to the right or left.

In these cases, reduce speed immediately and have wheels and tires thoroughly checked. To do so, drive carefully to the nearest MINI dealer or a specialized tire shop that has specially trained personnel working in accordance with the specifications of the MINI manufacturer. If necessary, have the vehicle towed there.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Otherwise, tire damage can be extremely dangerous for vehicle occupants and other road users.◀

Tire age

The manufacturing date of tires is contained in the tire coding:
DOT ... 1012 means that the tire was manufactured during the 10th week of 2012.

For various reasons, such as the development of brittleness, the manufacturer of your MINI recommends tire replacement after no more than 6 years, regardless of the actual wear of the tires.

RUN-FLAT TIRES

The symbol identifying run-flat tires is a circle with the letters RSC on the sidewall.
Run-flat tires comprise a conditionally self-supporting tire and a special rim. The reinforcement in the sidewalls ensures that the tire can continue to be used subject to certain restrictions, even if depressurized.

For information on continuing to drive with a flat tire, refer to Indication of a flat tire, page 76.

NEW WHEELS AND TIRES

Have new wheels and tires mounted only by your MINI dealer or a specialized tire shop that has specially trained personnel working in accordance with the specifications of the MINI manufacturer. If this work is not carried out properly, there is a danger of subsequent damage and related safety hazards. Make sure that the new wheels are balanced.◀

Retreaded tires

The manufacturer of your MINI recommends that you avoid using retreaded tires, as this could impair driving safety. The causes for this include potentially different tire casing structures and often wide variations in tire age, which can result in a limited service life.◀

Correct wheels and tires

The manufacturer of your MINI recommends mounting only wheels and tires that it has specifically approved for use on your particular model. Although other wheels and tires may theoretically have the same dimensions, variations in factors such as manufacturing tolerances can result in contact between tire and bodywork, ultimately leading to serious accidents. The manufacturer of your MINI cannot evaluate non-approved wheels and tires to determine if they are suited for use, and therefore cannot ensure the operating safety of the vehicle if they are mounted.◀

Your MINI dealer will be glad to inform you about the correct wheel and tire combination for your vehicle.

The correct combination of wheels and tires is also necessary to ensure reliable operation of various vehicle systems such as ABS and DSC.

To maintain good handling and vehicle response, use only tires of a single brand and tread configuration. After a tire has been damaged, mount the previous wheel and tire combination again as soon as possible.

Wheels with Tire Pressure Monitor TPM electronics

When mounting new tires or changing over from summer to winter tires, or vice versa, only use wheels with TPM electronics; otherwise, the Tire Pressure Monitor may not be able to detect a

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

puncture, refer to page 78. Your MINI dealer will be glad to advise you.

Recommended tire brands

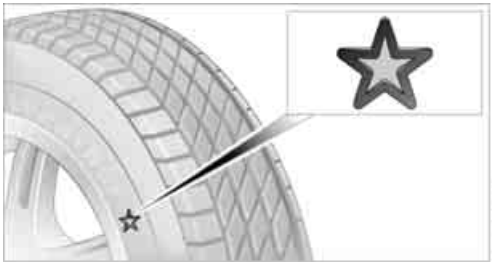

For each tire size, the manufacturer of your MINI recommends certain tire brands. They are marked with a clearly visible MINI designation on the sidewall of the tire.

When properly used, these tires meet the highest standards in terms of safety and handling characteristics.

Run-flat tires

When mounting new tires or changing over from summer to winter tires and vice versa, mount run-flat tires for your own safety. Keep in mind that no space-saver spare tire is available in the event of a flat. Your MINI dealer will be glad to advise you.

Special characteristics of winter tires

The manufacturer of your MINI recommends the use of winter tires on snowy roads or if temperatures drop below 45 °F /+7 °C. Although all-season M+S tires provide better winter traction than summer tires, they generally fail to provide the same levels of cold-weather performance as winter tires.

Pay attention to speed

Always comply with the speed limit for the winter tires mounted on your car; failure to do so could result in tire damage and accidents.◀

If the car is capable of speeds higher than that permitted for the winter tires, a label stating the maximum permitted speed for the mounted tires must be displayed in your field of view. This label is available at your tire dealer or MINI dealer.

Storage

Always store wheels and tires in a cool, dry place with as little exposure to light as possible. Always protect tires against all contact with oil, grease and fuels.

Do not exceed the maximum tire inflation pressure indicated on the side wall of the tire.

Swapping wheels among the axles

Depending on the individual use, front and rear tires may exhibit different wear and tear.

In order to maintain an even wear and tear, the wheels may be rotated between the axles. Your MINI dealer will be glad to advise you.

Always check the inflation pressure after the tire rotation, if necessary change the pressure.

SNOW CHAINS

Only certain types of fine-link snow chains have been tested by the manufacturer of your MINI, classified as road-safe and recommended. Contact your MINI dealer for more details.

Only attach snow chains in pairs to the front wheels with the following tires.

▷ 195/60 R 16 M+S

Observe the manufacturer's instructions when mounting snow chains. Do not exceed a speed of 30 mph or 50 km/h.

Do not initialize the Flat Tire Monitor if snow chains are mounted; otherwise, the instrument might issue an incorrect reading. When driving with snow chains, it can be useful to briefly deactivate DSC or activate DTC, refer to page 73.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

ENGINE COMPARTMENT

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

GENERAL INFORMATION

Never attempt to perform any service or repair operations on your vehicle without the required professional technical training. If you do not know how to follow the specified instructions, then have the work carried out by your MINI dealer. If this work is not carried out properly, there is a danger of subsequent damage and related safety hazards.◀

IMPORTANT PARTS OF THE ENGINE COMPARTMENT

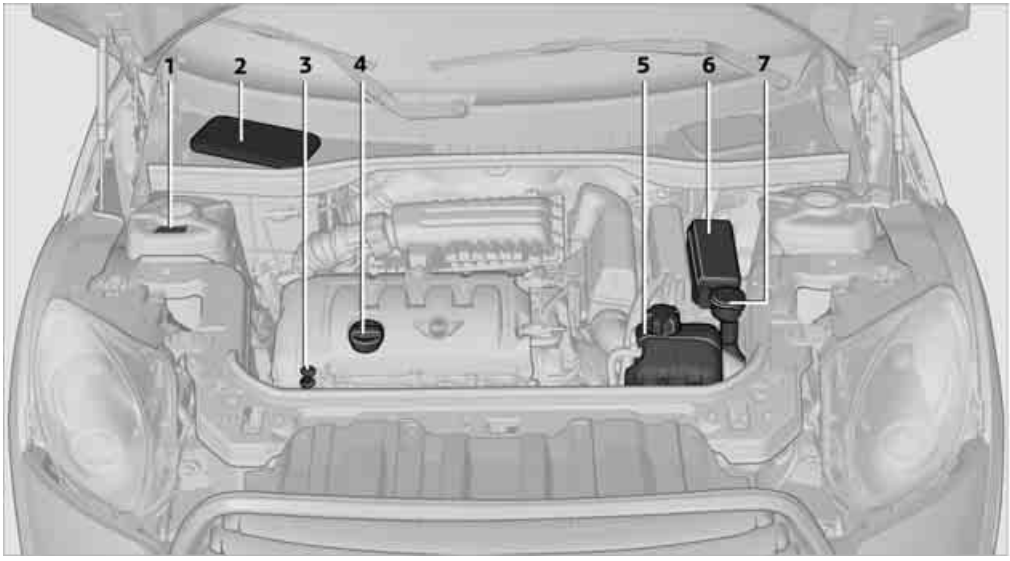

1 Vehicle identification number
2 Battery, under the cover 237
3 Engine oil dipstick 215
4 Engine oil filler neck 216
5 Coolant expansion tank 217
6 Engine compartment fuse box 234
7 Reservoir for washer fluid for the headlamp and window washer system 57

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

HOOD

Releasing

Pull the lever.

Do not clean the windshield and headlamps if the hood is unlocked as this may damage the headlamp washer system.◀

Opening

To avoid damage, make sure that the wiper arms are against the windshield before you open the hood.◀

Press the release handle and open the hood.

Closing

Close the hood from a height of approx. 16 in/ 40 cm with momentum. It must be clearly heard to engage.

If you notice any signs while driving your vehicle that the hood is not completely closed, stop at once and close it securely. Make sure that the closing path of the hood is clear; otherwise, injuries may result.◀

ENGINE OIL

Engine oil consumption depends on driving style and operating conditions, e.g., with a very sporty driving style, the engine oil consumption is significantly increased.

Therefore, check the engine oil level regularly after each refueling.

Checking engine oil level

1. With the vehicle's engine at normal operating temperature, i.e. after uninterrupted driving for at least 6 miles/10 km, park the vehicle on a level surface.
2. Switch off the engine.
3. Pull the dipstick out after approx. 5 minutes and wipe it off with a lint-free cloth, paper towel or similar material.
4. Carefully push the dipstick all the way into the guide tube and pull it out again. The oil level should be between the two marks on the dipstick.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

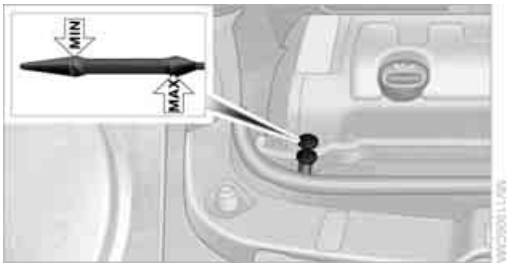

The oil quantity corresponding to the difference between the two marks on the dipstick is 1 US quart/1 liter.

Do not fill beyond the upper mark on the dipstick. Excess oil will damage the engine.◀

Adding engine oil

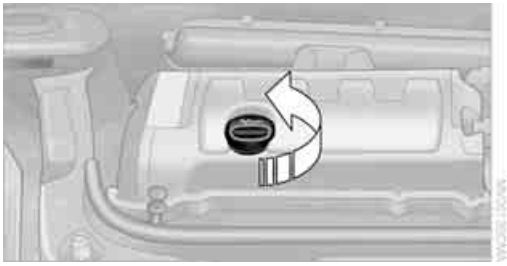

Do not add the maximum quantity of 1 US quart/1 liter of engine oil until the oil level has dropped to just above the lower mark on the dipstick, page 215.

Add oil within the next 30 miles/50 km; otherwise, the engine could be damaged.◀

If too much motor oil is added, immediately have the vehicle checked; otherwise, damage to the engine may result.◀

Keep oils, grease, etc. out of the reach of children and comply with the warnings on the containers. Otherwise, health hazards may result.◀

Oil types for refilling

Notes

Do not use oil additives as this could result in engine damage.◀

When choosing oil, make sure that it belongs to one of the SAE viscosity classes 0W-40, 0W-30, 5W-40 and 5W-30; otherwise, malfunctions and damage to the engine may result.◀

The engine oil quality is critical for the life of the engine.

Some types of oil may not be available in every country.

Approved oil types

Gasoline engines
BMW High Performance SAE 5W-30
BMW Longlife-01
BMW Longlife-01 FE

Additional information on approved types of oil can be found at a MINI dealer.

Alternative oil types

If the approved engine oils are not available, up to 1 US quart/1 liter of another oil with the following specification may be used:

Gasoline engines
API SM or higher specifications

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Oil change

Only MINI dealers are to perform oil changes.

MINI RECOMMENDS Castrol

COOLANT

Coolant consists of half water and half additive. Not all commercially available additives are suitable for your MINI. Your MINI dealer knows which additives are suitable and will be glad to advise you.

Only use suitable additives; otherwise, engine damage may result. Because additives are harmful to your health, it is important to follow the instructions on the containers.◀

Comply with the appropriate environmental protection regulations when disposing of coolant additives.◀

Coolant temperature

A warning lamp will come on if the coolant, and therefore the engine, becomes too hot.
A message appears on the Control Display.

Checking coolant level

Do not add coolant to the cooling system when the engine is hot. Escaping coolant can cause burns.◀

Do not open the hood until the engine has cooled down.

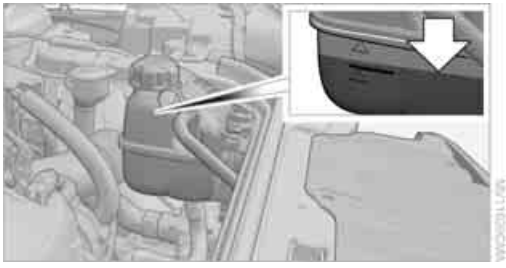

The coolant level is correct if it is between the Min and Max markings.

Topping off

1. Turn the cap of the expansion tank a little counterclockwise to allow any accumulated pressure to escape, then continue turning to open.
2. Slowly fill to the correct fluid level; do not overfill.
3. Close by turning the cap.

Have the reason for the coolant loss eliminated as soon as possible.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MAINTENANCE

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

MINI MAINTENANCE SYSTEM

The MINI Maintenance System supports the preservation of the traffic and operating safety of your MINI. The objective is to optimize efforts with respect to minimal vehicle maintenance costs.

If and when you come to sell your MINI, a comprehensive record of servicing will prove a significant benefit.

Condition Based Service CBS

Sensors and special algorithms take the different driving conditions of your MINI into account. Condition Based Service uses this to determine the current and future service requirements. By letting you define a service and maintenance regimen that reflects your own individual requirements, the system builds the basis for trouble-free driving.

On the Control Display, you can have the remaining times or distances for selected maintenance tasks and any legally prescribed dates displayed, page 64.

Service data in the remote control

Your vehicle continuously stores service-requirement information in the remote control while you are driving. Your MINI dealer can read out this data from the remote control unit, and propose an optimized maintenance approach. Whenever you take your car in for servicing you should therefore hand your MINI dealer the remote control unit that you last used.

Make sure that the date is always set correctly, page 67; otherwise, the effectiveness of Condition Based Service CBS is not assured.◀

Service and Warranty Information Booklet for US models and Warranty and Service Guide Booklet for Canadian models

Please consult your Service and Warranty Information Booklet for US models and Warranty and Service Guide Booklet for Canadian models for additional information on service requirements.

The manufacturer of the MINI recommends that you have service and repair operations performed at your MINI dealer. Take the time to ensure that these service procedures are confirmed by entries in your vehicle's Service and Warranty Information Booklet for US models and Warranty and Service Guide Booklet for Canadian models. These entries verify that your vehicle has received the specified regular maintenance.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

SOCKET FOR ON-BOARD DIAGNOSIS OBD

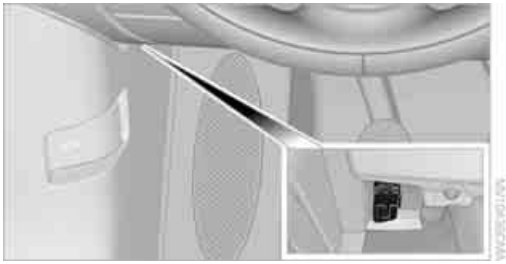

The primary components that make up the emissions can be checked by a device via the OBD socket.

EMISSIONS



The warning lamps come on. The vehicle is producing higher emissions. You can continue your journey, but moderate your speed and exercise due caution. Have the car checked as soon as possible.

Under certain circumstances, one of the lamps will flash or light up continuously. This indicates excessive misfiring or a malfunction in the engine. If this happens, reduce your speed and visit the nearest MINI dealer as soon as possible. Severe misfiring can quickly lead to serious damage of emissions-related components, especially the catalytic converter. In addition, mechanical engine components can become damaged.

If the fuel cap is not properly tightened, the OBD system may conclude that fuel vapors are escaping, causing an indicator to light up. If the fuel cap is then tightened, the indicator should go out within a few days.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CARE

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

CAR-CARE PRODUCTS

Regular cleaning and care helps to maintain the value of your MINI.

The manufacturer of your MINI recommends using manufacturer-approved products to clean and care for your vehicle.

Your MINI dealer would be pleased to advise you on cleaning and care products and services for your MINI.

The ingredients of original MINI Care Products have been tested, and the products have been tested in the laboratory and in practice. They offer optimum care and protection for your vehicle.◀

Do not use any cleansers containing alcohol or solvents as these may cause damage.◀

Cleaning agents may contain hazardous or health-damaging substances. Follow the warning and hazard instructions on the packaging. For interior cleaning, always open the doors or windows of the vehicle.
Do not use any products that are not intended for cleaning the vehicle.◀

EXTERNAL CARE

Washing your vehicle

Especially during the winter months the vehicle should be frequently washed. Dirt and road salt can damage the vehicle.◀

After washing the vehicle, apply the brakes briefly to dry them; otherwise, water can reduce braking efficiency over the short term and the brake rotors can corrode.◀

Regularly open the hood and clear out any debris such as leaves that may have collected in the region of the windshield.

Car washes

Preference should be given to cloth car washes.

Do not use automatic high-pressure car washes; otherwise, water may drip into the vehicle around the windows.◀

Before driving into the car wash, check if the system is suitable for your MINI. Observe the following points:

- Vehicle dimensions, page 246
- If necessary: fold in the outside mirrors, page 44
- Maximum permissible tire width

Avoid car washes with tracks higher than 4 in/10 cm; otherwise, the chassis could be damaged.◀

Preparations for driving into the car wash:

- Unscrew the rod antenna.
- Deactivate the rain sensor to prevent unintentional wiping.
- Deactivate rear window wiper and protect it from damage. Ask the car wash operator about measures that can be taken to protect the wipers.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

- Remove additional attachments, e.g. spoilers or telephone antennas, if there is a possibility that they could be damaged.
- Insert the remote control into the ignition lock.

Automatic transmission

Before driving into the car wash, make sure that the vehicle can roll:

1. Place the remote control, even with Comfort Access, in the ignition lock.
2. Move the selector lever to position N.
3. Release the parking brake.
4. Switch off the engine.
5. Insert the remote control in the ignition lock so that the vehicle can roll.

Steam jets/high-pressure washers

When using steam jets or high-pressure washers, make sure that you maintain sufficient distance from the vehicle and do not exceed a maximum temperature of 140 °F / 60 °C.
If the distance is too close, the pressure too high, or the temperature too high, parts of the vehicle can be damaged, or water can penetrate. Observe the operating instructions for high-pressure washers.◀

Do not spray sensors such as the Park Distance Control with high-pressure washers for a long time and maintain the greatest possible distance of approx. 1 ft/30 cm from them.◀

Manual washing

Use a great deal of water and, if necessary, car shampoo when washing your car by hand. Clean the vehicle with a sponge or a washing brush applying a slight amount of pressure.

Before cleaning the windshield, deactivate the rain sensor or turn off the ignition to prevent unintentional wiping.◀

Observe local regulations regarding washing vehicles by hand.◀

Headlamps

Do not wipe dry and do not use abrasive or corrosive cleaning agents. Remove dirt and contamination, such as insects, by soaking with shampoo and then washing with plenty of water.

Do not remove accumulated ice and snow with an ice scraper; use window deicers instead.

Windows

Clean the outside and inside of the windows and mirrors with a window cleaner.

Do not clean the mirrors with cleaners containing quartz.◀

Wiper blades

Clean with soapy water and change regularly to prevent the formation of streaks.

Wax, preservatives and dirt on the windows cause streaks when the windshield wipers are on, and can cause premature wear of the wiper blades and interfere with the rain sensor.◀

Paintwork, care

Regular care helps your vehicle retain its value and protects the paint from the long-term effects of aggressive substances.

Environmental influences in areas with increased air pollution or natural contaminants, such as tree sap or pollen, can affect the vehicle paintwork. It is therefore important to adjust the frequency and extent of vehicle care correspondingly.

Immediately remove any particularly aggressive substances, such as fuel that has overflowed, oil, grease, brake fluid, or bird droppings; otherwise, paint damage can be caused.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Removing paintwork damage

Depending on the severity of the damage, immediately repair stone damage or scratches to prevent rusting.◀

The manufacturer of the MINI recommends repairing paint damage professionally according to factory specifications with original MINI paints.

Preservation

Preservation is necessary when water no longer beads on the clean paint surface. To preserve the paint, only use preservatives that contain carnauba or synthetic waxes.

Rubber seals

Only treat with water or rubber care products.

Do not use silicon sprays or other silicon-containing care products on rubber seals; otherwise, noise and damage could occur.◀

Chrome parts

Carefully clean vehicle parts such as the radiator grill and door handles with copious quantities of water and, if necessary, a shampoo additive, especially when contaminated with road salt. For additional treatment, use chrome polish.

Light alloy wheels

The system produces brake dust that collects on the light alloy wheels. Clean them regularly with acid-free wheel cleaner.

Do not use aggressive, acid-containing, highly alkaline, or abrasive cleansers or steam jets hotter than 140 °F /60 °C as they may cause damage.◀

External sensors

Keep the outside sensors on the vehicle such as the Park Distance Control clean and ice-free to ensure that they function properly.◀

INTERNAL CARE

Upholstery/fabrics

Regularly use a vacuum cleaner to remove surface dirt.

In case of serious spots such as liquid stains, use a soft sponge or lint-free microfiber cloth and suitable interior cleaners. Observe the instructions on the packaging.

Clean upholstery up to the seams. Do not rub forcefully.◀

Velcro fasteners on pants or other items of clothing can damage seat covers. Make sure that all Velcro fasteners are closed.◀

Leather/leather coverings

The leather processed by the manufacturer of your MINI is a high-quality natural product. Light variations in the grain is one of the typical properties of natural leather.◀

Dust and road grit in the pores and folds of the leather have an abrasive effect, leading to increased wear and causing the leather surface to become brittle prematurely. Use a cloth or vacuum cleaner to remove dust on a regular basis.

Especially when the leather has a light color, it should be cleaned regularly since it tends to get heavily soiled.

Treat the leather twice a year using a leather lotion since dirt and grease will gradually attack the leather's protective layer.

Carpets/floor mats

Keep floor mats, carpet, and other objects out of the movement range of the pedals; otherwise, they may inhibit the function of the pedals during driving.
Do not place additional floor mats onto an existing one or onto other objects.
Only use floor mats that have been approved for the vehicle and can be appropriately fastened.
Make sure that the floor mats are securely fas-

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

tened again after they have been removed, e.g. for cleaning.◀

Floor mats can be removed to be cleaned.

If the carpets are very dirty, clean with a microfiber cloth and water or an interior cleaner. When doing so, rub forward and back in the driving direction; otherwise, the carpet may become matted.

Interior plastic parts

These include:

- Plastic surfaces
- Lamp glass
- Display panes
- Mat parts

Only clean with water and, if necessary, solvent-free plastic cleaners.

Do not use solvents such as alcohol, lacquer thinner, cold cleaners, fuel, or similar, as these will damage the surfaces.◀

Decorative strips

Only clean decorative strips and fine wood parts with damp cloths. Wipe dry with a soft cloth.

Safety belts

Dirty belt straps impede the reeling action and thus have a negative impact on safety.

Do not clean chemically, as this may destroy the webbing.◀

Displays

To clean displays, such as the radio or display elements, use an anti-static microfiber cloth.

Avoid pressing too hard when cleaning the display as this can cause damage.◀

Do not use chemical or abrasive household cleaning agents. Keep fluids of any kind away from the device. Surfaces or electrical components may otherwise become corroded or damaged.◀

CD/DVD drives

Do not use cleaning CDs as this could damage parts of the drive.◀

VEHICLE STORAGE

If you park your vehicle longer than three months, ask your MINI dealer to advise you.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

REPLACING COMPONENTS

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

WIPER BLADES

Do not place windshield wipers on the windshield if wiper blades are not installed; otherwise, the windshield may be damaged.◀

Changing the front wiper blades

1. Fold out the wiper arm and hold it.

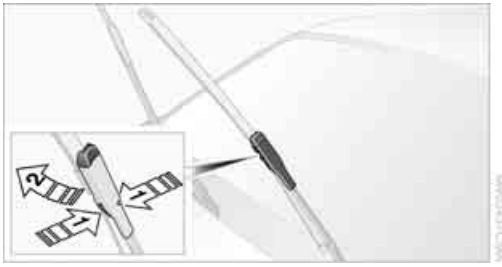

2. Compress the locking spring, arrows **1**, and fold out the wiper blade, arrow **2**.
3. Pull the wiper blade forward and out of the catch mechanism.
4. Press the new wiper blade into the fixture until it engages audibly.

To avoid damage, make sure that the wiper arms are against the windshield before you open the hood.◀

Changing the rear wiper blade

MINI Countryman:

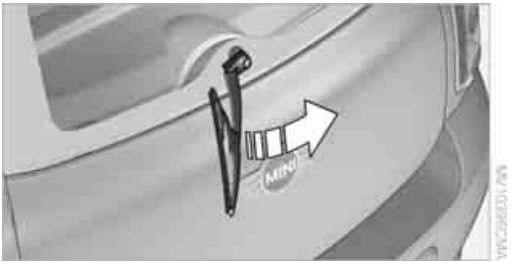

MINI Paceman:

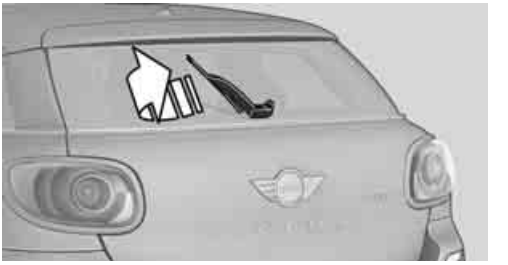

1. Fold out the wiper arm and hold it.
2. Rotate the wiper blade toward the back as far as it will go, arrow.
3. Press the wiper blade against the limit and thus out of the mounting.
4. Press the new wiper blade into the fixture until it engages audibly.

LAMPS AND BULBS

Lamps and bulbs make an essential contribution to vehicle safety. They should, therefore, be handled carefully. The manufacturer of your MINI recommends having your MINI dealer perform any work that you do not feel competent to perform yourself or that is not described here.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Never touch the glass of new bulbs with your bare fingers, as even minute amounts of contamination will burn into the bulb's surface and reduce its service life. Use a clean tissue, cloth or something similar, or hold the bulb by its base.◀

You can obtain a selection of replacement bulbs at your MINI dealer.

Only replace bulbs after they have cooled down; otherwise, you may burn your fingers.◀

When working on electrical systems, always begin by switching off the consumer in question; otherwise, short circuits could result. To avoid possible injury or equipment damage when replacing bulbs, observe any instructions provided by the bulb manufacturer.◀

Caring for headlamps, refer to page 221.

For any bulb replacement not described below, contact a MINI dealer or a workshop that has specially trained personnel working in accordance with the specifications of the MINI manufacturer.◀

For checking and adjusting headlamp aim, please contact your MINI dealer.◀

Light-emitting diodes LEDs

Light-emitting diodes installed behind translucent lenses serve as the light sources for many of the controls and displays in your vehicle. These light-emitting diodes are related to conventional laser diodes, and legislation defines them as Class 1 light-emitting diodes.

Do not remove the covers or expose the eyes directly to the unfiltered light source for several hours; otherwise, this could cause irritation of the retina.◀

Headlamp glass lens

In cool or humid weather, condensation may occur on the interiors of the headlamps. During trips with the headlamps on, the condensation disappears after a short time. The headlamps do not need to be changed.

Do not remove the condensation from headlamps, despite driving with lights on, and if condensation increases, e.g., because of water droplets, have this checked by your MINI dealer.

Xenon lamps

The service life of these bulbs is very long and the probability of failure very low, provided that they are not switched on and off an excessive number of times. If a xenon lamp fails nevertheless, switch on the fog lamps and continue the journey with great care, provided that local legislation does not prohibit this.

Work on the xenon lighting system, including lamp replacement, is only to be carried out only by your MINI dealer. Due to high voltage, there is a risk of fatal injury if work on the xenon lamps is carried out improperly.◀

Halogen low beams and high beams

H13 bulb, 60/55 watts

The H13 bulb is pressurized. Therefore, wear safety glasses and protective gloves. Otherwise, there is a risk of injury if the bulb is damaged.◀

Be careful when installing the cover; otherwise, leaks could occur and cause damage to the headlamp system.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Accessing the lamp from the engine compartment

The low-beam/high-beam bulb can be changed from the engine compartment.

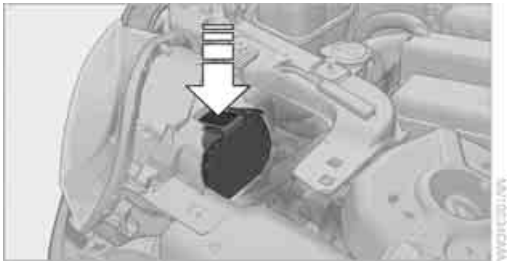

Removing the cover:

1. Press the tab.
2. Flip open the cover and take it out of the holder.

Follow the same steps in reverse order to reattach the cover.

Replacing the bulb

1. Turn the lamp counterclockwise, arrow **1**, and remove it, arrow **2**.

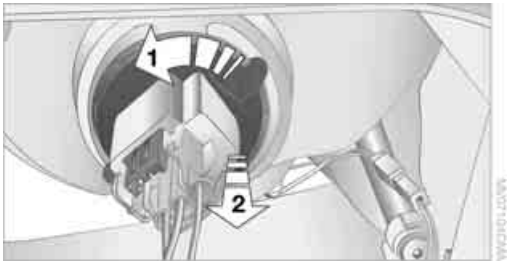

2. Push on the catch, arrow **1**, and disconnect the connector, arrow **2**.

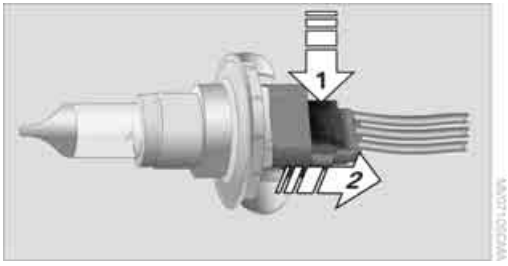

3. To insert the new bulb and replace the cover, proceed in reverse order.

Turn signals, parking lamps, roadside parking lamps, and fog lamps

Accessing the lamps via the wheel well

1 Turn signal

2 Parking/roadside parking/fog lamps

Replacing a turn signal bulb

21 watt bulb, P21W, if necessary PY 21 W

1. Turn in the wheel.
2. Remove cover **1**.
   To do so, turn the cover counterclockwise.
3. Remove the inside cover.
   To do so, turn the cover counterclockwise.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

4. Unscrew the bulb counterclockwise.

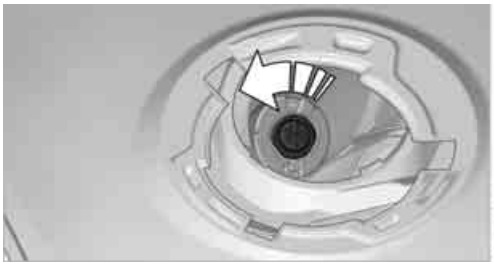

5. To insert the new bulb and replace the covers, proceed in reverse order.

Replacing a parking/roadside parking lamp bulb

5 watt bulb, W 5 W

1. Turn in the wheel.
2. Remove cover **2**.
   To do so, turn the cover counterclockwise.
3. Unscrew the upper bulb counterclockwise.

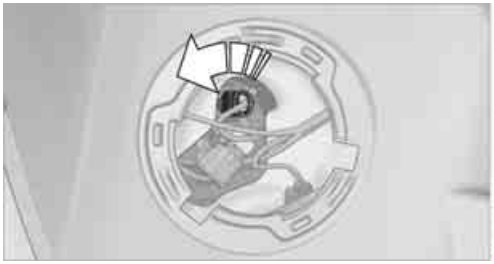

4. To insert the new bulb and replace the cover, proceed in reverse order.

Replacing a fog lamp bulb

H8 bulb, 35 watts

1. Turn in the wheel.
2. Remove cover **2**.
   To do so, turn the cover counterclockwise.
3. Detach the cable connector.
4. Unscrew the lower bulb counterclockwise.

5. To insert the new bulb and replace the cover, proceed in reverse order.

Side turn signals

5 watt bulb, W 5 W

1. Open hood.

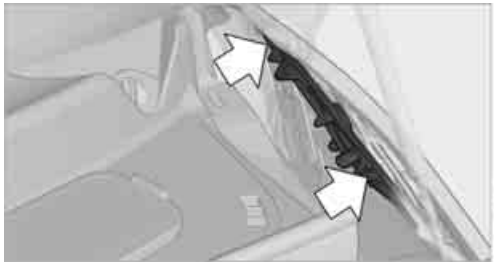

2. Squeeze clamping clip, arrows, and remove bulb holder.
3. Unscrew bulb counterclockwise and replace.
4. To insert the new bulb and replace the cover, proceed in reverse order.

Side marker lamps

Have these bulbs replaced by your MINI dealer.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Tail lamps

Bulb P 21 W

MINI Countryman:

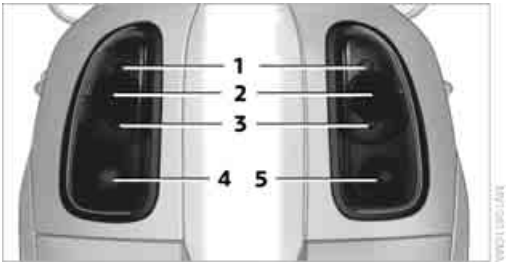

1 Brake/tail lamp
2 Turn signal
3 Brake/tail lamp
4 Backup lamps
5 Backup lamps

MINI Paceman:

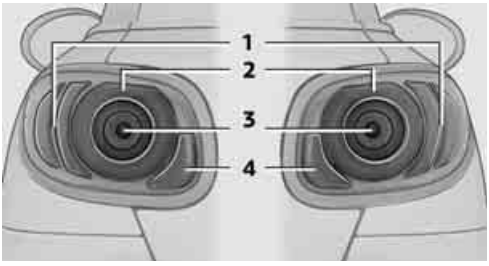

1 Brake light
2 Rear lamp
3 Turn signal
4 Backup lamps

Changing

All bulbs are integrated in a central bulb holder.

MINI Countryman:

1. Switch off the light and remove the infrared remote control from the ignition lock.
2. Open the tailgate,
3. Push the cover panel out from the rear of the cargo area side trim panel and remove it.

4. Open emergency release for the fuel filler flap, see page 200, and then push to the side with the foam insert.
   Ensure that the emergency release is not damaged.
5. Disengage the bulb holder by pressing down on the clamping clip, arrow **1**.

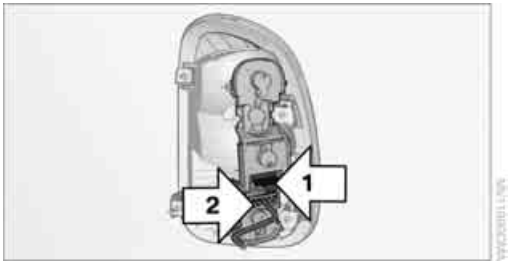

6. Take out bulb holder and pull out cable, arrow **2**.
7. Exerting gentle pressure, turn bulb to the left and remove.
8. To insert the new bulb and install the bulb holder, proceed in reverse order. Ensure that the lamp holder engages in all the fasteners.
9. Put foam insert in its original position and install the emergency fuel flap release.
10. Install cover.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Paceman:

1. Switch off the light and remove the infrared remote control from the ignition lock.
2. Open the tailgate,
3. Remove the cover from the luggage compartment side panel.

4. Unlock the retaining element, arrow **1**, by turning it.

5. Remove the screws, arrow **2**, using the hex wrench from the vehicle document case.
6. Remove the tail lamp.
7. Disengage the bulb holder by pressing down on the clamping clip, arrow **1**.

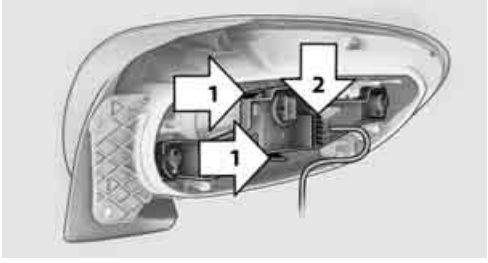

8. Take out bulb holder and pull out cable, arrow **2**.
9. Exerting gentle pressure, turn bulb to the left and remove.
10. To insert the new bulb and install the bulb holder, proceed in reverse order. Ensure that the lamp holder engages in all the fasteners.

License plate lamps

5 watt bulb, C 5 W

MINI Countryman:

MINI Paceman:

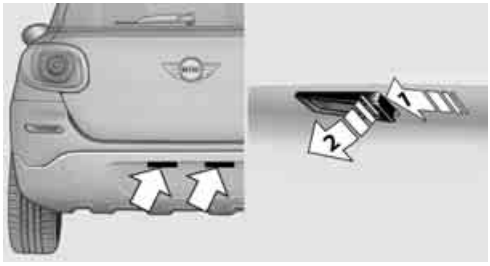

1. Using a screwdriver, push the lamp to the left in the tab of the lamp housing, arrow **1**.
2. Remove the lamp, arrow **2**.
3. Replace the bulb.
4. Insert the lamp.

Center brake lamp

This lamp uses LED technology for operation. In the event of a malfunction, contact your MINI dealer or a workshop that has specially trained personnel working in accordance with the specifications of your MINI manufacturer.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

REPAIRING A FLAT TIRE

Safety measures in the event of a breakdown:
Park the vehicle as far as possible from moving traffic and switch on the hazard warning flashers.
Turn the steering wheel until the front wheels are in the straight-ahead position and engage the steering wheel lock. Engage the parking brake and shift into 1st or reverse gear or place the selector lever in position P.
All passengers should be outside the vehicle and in a safe place, e.g. behind a guardrail.
Erect a warning triangle or warning flasher at the appropriate distance if necessary. Comply with all safety guidelines and regulations.◀

In the event of a flat tire, different procedures should be followed depending on the equipment included in your vehicle:

- MINI Mobility Kit, refer to the following section
- Run-flat tires, page 212

MINI Mobility Kit

The Mobility Kit is located under the left front seat.

Preparations

Use of the MINI Mobility Kit may be ineffective if the tire puncture measures approx. 1/8 in/4 mm or more. Contact the nearest MINI dealer if the tire cannot be made drivable with the Mobility Kit.

Do not remove foreign bodies which have penetrated the tire if possible.

Follow the instructions on using the Mobility Kit found on the compressor and the sealant bottle.◀

Remove the adhesive label for the speed limit from the sealant bottle and affix it to the steering wheel.

Sealant and compressor

1 Sealant bottle and adhesive label with speed limit

2 Filling hose

Note the use-by date on the sealant bottle.◀

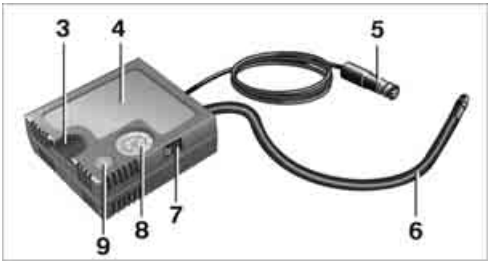

3 Holder for the sealant bottle

4 Compressor

5 Plug and cable for the socket in the vehicle interior, page 101

6 Connection hose to connect the compressor and sealant bottle or the compressor and wheel

7 On/off switch

8 Pressure gauge for indicating the tire inflation pressure

9 Release button for reducing the tire inflation pressure

Connector, cable and connection hose are stored in the compressor housing.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Using the Mobility Kit

To repair a tire puncture with the Mobility Kit, proceed as follows:

- ▷ Filling the tire with sealant.
- ▷ Distributing the sealant.
- ▷ Correct the tire inflation pressure.

Filling the tire with sealant

Proceed in the specified order; otherwise, sealant may emerge under high pressure.◀

1. Shake the sealant bottle.
2. Pull the connecting hose **6** completely out of the compressor housing and screw it onto the connector of the sealant bottle. Make sure that the hose is not kinked.
3. Insert the sealant bottle on the compressor housing in an upright position.

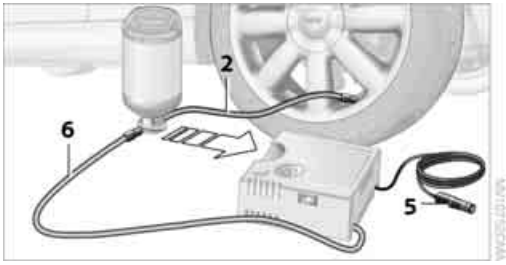

4. Unscrew the dust cap from the valve of the defective wheel and screw the filling hose **2** of the sealant bottle onto the valve.
5. Ensure that the compressor is switched off.
6. Insert the plug **5** into the lighter socket/ power socket in the vehicle interior, page 101.
7. With the engine running:
   Switch on the compressor and let run for about 3 to 8 minutes in order to add the sealant and to achieve an inflation pressure of about 1.8 bar/26 psi.

When adding sealant, the filling pressure can temporarily increase up to about 5 bar/73 psi. Do not switch off the compressor during this phase.◀

Do not run the compressor for longer than 10 minutes; otherwise, the device will overheat and possibly be damaged.◀

8. Switch off the compressor.

If an inflation pressure of 1.8 bar/26 psi is not reached:

1. Unscrew the filling hose **2** from the wheel and drive the vehicle forward and backward approx. 33 ft/10 m to distribute the liquid sealant in the tire evenly.
2. Inflate the tire again with the compressor.

If an inflation pressure of 1.8 bar/26 psi still cannot be reached, then the tire is too heavily damaged. Please contact the nearest MINI dealer.◀

Stowing Mobility Kit

1. Unscrew filler hose **2** of the sealant bottle from the wheel.
2. Unscrew connecting hose of the compressor **6** from the sealant bottle.
3. Connect the filler hose **2** of the sealant bottle to the unoccupied connection on the sealant bottle.
   This prevents the rest of the sealant from escaping from the bottle.
4. Wrap the empty sealant bottle in suitable material to avoid dirtying the cargo area.
5. Stow Mobility Kit back in the vehicle.

Distributing the sealant

Immediately drive approx. 3.1 miles/5 km so that the sealant evenly distributes itself.

Do not exceed speeds of 50 mph/ 80 km/h.
If possible, do not drop below 10 mph/ 20 km/h.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Correct the tire inflation pressure

1. After driving approx. 3.1 miles/5 km or ten minutes, stop at a suitable location.
2. Screw the connection hose **6** of the compressor directly onto the tire valve.
3. Insert the plug **5** into the power socket in the vehicle interior.
4. Adjust tire pressure to 1.8 bar/26 psi. With the engine running:

▷ To increase the inflation pressure: switch on the compressor. To check the current inflation pressure, switch off the compressor.

Do not run the compressor for longer than 10 minutes; otherwise, the device will overheat and possibly be damaged.◀

▷ To decrease the inflation pressure: press the release button **9**.

If the tire cannot maintain the inflation pressure, drive the vehicle again, refer to Distributing the sealant. Then repeat steps 1 to 4.
If an inflation pressure of 1.8 bar/26 psi still cannot be reached, then the tire is too heavily damaged. Contact your nearest MINI dealer.◀

Driving on

Do not exceed the permitted maximum speed of 50 mph/80 km/h; doing so may result in an accident.◀

Replace the defective tire as soon as possible and have the new wheel/tire assembly balanced.

Have the Mobility Kit refilled.

CHANGING WHEELS

The tire change set is available from as an optional accessory at your MINI dealer.

Preparing for a wheel change

Observe the safety precautions regarding flat tires on page 230.◀

Additional safety measures when changing tires:
Only change the tire when parked on a surface that is level, firm and not slippery.
The vehicle or the jack could slip sideways on soft or slippery support surfaces, such as snow, ice, flagstones, etc.
Do not use a wooden block or similar object as a support base for the jack, as this would prevent it from extending to its full support height and reduce its load-carrying capacity.
Do not lie under the vehicle or start the engine when the vehicle is supported by the jack; otherwise, there is a risk of fatal injury.◀

1. Place the foldable chock behind the front wheel on the other side of the vehicle or in front of the wheel if the vehicle is on an incline. If the wheel is changed on a surface with a more severe slope, take additional precautions to secure the vehicle from rolling.
2. Uncover the lug bolts if necessary.
3. Loosen the lug bolts by a half turn.

Jacking up the vehicle

The vehicle jack is designed for changing wheels only. Do not attempt to raise another vehicle model with it or to raise any load of any kind. To do so could cause accidents and personal injury.◀

1. Place the jack at the jacking point closest to the wheel.
   The jack base must be perpendicular to the surface beneath the jacking point.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Countryman:

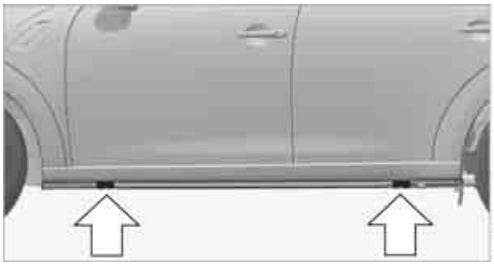

MINI Paceman:

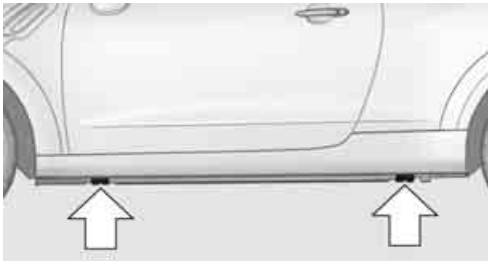

2. Slide reversible ratchet onto the fixture on the jack, arrow **1**.

3. As you ratchet up the jack, place the jack head onto the lifting point on the body, arrow **2**.
4. Jack the vehicle up until the wheel you are changing is raised off the ground.

Mounting the wheel

1. Unscrew the lug bolts and remove the wheel.
2. Remove accumulations of mud or dirt from the mounting surfaces of the wheel and hub. Clean the lug bolts.
3. Lift the new wheel into place.
4. Screw at least two lug bolts finger-tight into opposite bolt holes.
5. Screw in the remaining bolts.
6. Tighten all the lug bolts firmly in a diagonal pattern.
7. Lower the vehicle.
8. Remove the jack.

Tightening the lug bolts

Tighten the lug bolts in a diagonal pattern.

Immediately have the wheels checked with a calibrated torque wrench to ensure that the lug bolts are firmly seated. Otherwise, incorrectly tightened lug bolts can present a safety hazard.◀

Tightening torque: 103.3 lb ft or 140 Nm.

Replace the defective tire as soon as possible and have the new wheel/tire assembly balanced.

VEHICLE BATTERY

Maintenance

The battery is maintenance-free; that is, the electrolyte will last for the life of the battery when the vehicle is operated in a temperate climate.

If you have any questions regarding your battery, please contact your MINI dealer.

Battery replacement

Only use vehicle batteries that have been approved for your vehicle by the manufacturer; otherwise, the vehicle could be damaged and systems or functions may not be fully available.◀

After a battery replacement, have the battery registered on the vehicle by your MINI dealer to ensure that all convenience functions are fully available and, if necessary, the corresponding

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Check Control messages are no longer displayed.

Charging the battery

Note

Do not connect battery chargers to the sockets installed in the vehicle at the factory; otherwise you may cause damage to the battery.◀

Only charge the battery in the vehicle when the engine is off. Connections, refer to Jump-starting on page 236.

General information

To guarantee the full service life of the battery, make sure that the battery is always properly charged.

It may be necessary to charge the battery in the following situations:

- If frequent short trips are taken.
- If the vehicle is frequently parked for more than a month.

Disposal

After replacing old batteries, return the used batteries to your MINI dealer or to a recycling center. Maintain the battery in an upright position for transport and storage. Always secure the battery against tipping over during transport.◀

Power failure

After a temporary power loss, some equipment may not be fully functional and may require initialization. Individual settings are also lost and must be reprogrammed:

- Time and date
  These values must be updated, page 66.
- Radio
  In some cases, stations may have to be stored again, page 143.
- Onboard monitor
  Operability must be waited for, page 118.
- Glass sunroof, electric
  It may only be possible to tilt the sunroof, if applicable. The system must be initialized. Contact your nearest MINI dealer.

Indicator and warning lamps

Lights up in red:

Battery is no longer being charged. Alternator malfunction.

Switch off all unnecessary electrical consumers. Have the battery checked without delay.

Lights up in yellow:

Battery charge level very low, battery aged, or battery not securely connected.

Charge it by taking a longer drive or by using an external charger. If the display appears again, have the battery checked as soon as possible.

FUSES

Do not attempt to repair a blown fuse or replace it with a fuse of a different color or Ampere rating. To do this could cause a fire in the vehicle resulting from a circuit overload. Have fuses replaced by your MINI dealer.◀

A fuse assignment diagram is located on the inside of the fuse box cover panels.

In the engine compartment

Opening the cover

Press the latch.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

In the vehicle interior

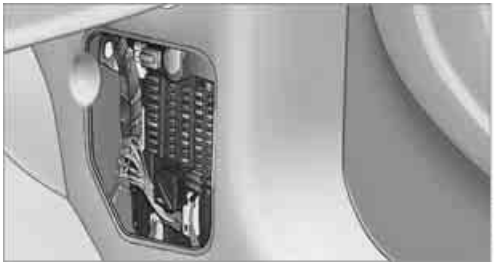

On the right side of the footwell.

Opening the cover

Press out at the recess.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

GIVING AND RECEIVING ASSISTANCE

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

ROADSIDE ASSISTANCE

Roadside Assistance is available by phone 24 hours a day in many countries. You can obtain assistance there in the event of a vehicle breakdown.

FIRST AID POUCH

Some of the articles contained in the first aid pouch have a limited service life. Therefore, check the expiration dates of the contents regularly and replace any items in good time, if necessary.

The first aid pouch is located on the rear cargo well by the left side trim panel or under the pull-out floor panel.

WARNING TRIANGLE

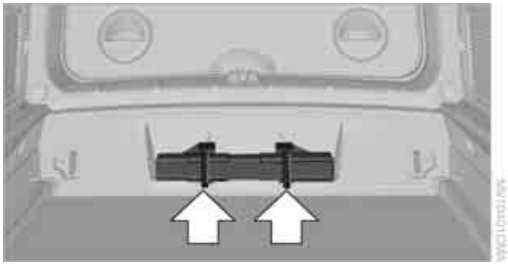

In the cargo area under the loading sill.

To remove, open the two clasps.

JUMP-STARTING

If the car's own battery is flat, your MINI's engine can be started by connecting two jumper cables to another vehicle's battery. You can also use the same method to help start another vehicle. Only use jumper cables with fully-insulated clamp handles.

Do not touch any electrically live parts when the engine is running, or a fatal accident may occur. Carefully adhere to the following sequence, both to prevent damage to one or both vehicles, and to guard against possible personal injuries.◀

Preparation

1. Check whether the battery of the other vehicle has a voltage of 12 volts and approximately the same capacitance in Ah. This information can be found on the battery.
2. Switch off the engine of the support vehicle.
3. Switch off any consumers in both vehicles.

There must not be any contact between the bodies of the two vehicles; otherwise, there is a danger of shorting.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Connecting jumper cables

Connect the jumper cables in the correct order, so that no sparks which could cause injury occur.◀

1. Open the battery cover in the engine compartment to access the positive terminal of your MINI.

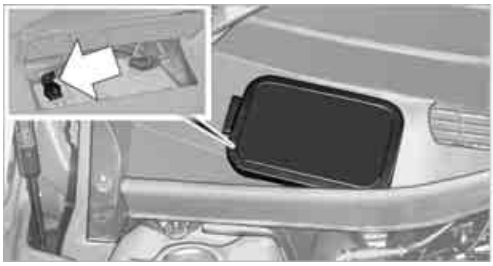

2. Release the tabs on the left and right sides of the positive terminal cover, arrows **1**, and lift the cover to open, arrow **2**.

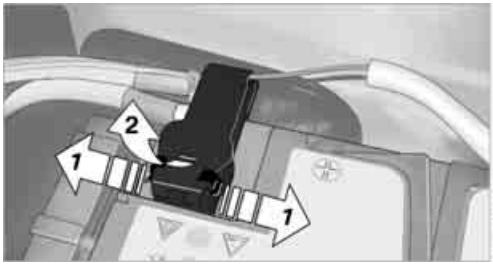

3. Attach one terminal clamp of the plus/+ jumper cable to the positive terminal of the battery or to a starting-aid terminal of the vehicle providing assistance.
4. Attach the second terminal clamp of the plus/+ jumper cable to the positive terminal of the battery or a starting-aid terminal of the vehicle to be started.
5. Attach one terminal clamp of the minus/– jumper cable to the negative terminal of the battery or to an engine or body ground of the assisting vehicle.

Body ground in MINI:

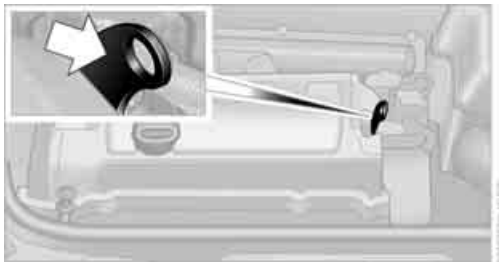

6. Attach the second terminal clamp of the minus/– jumper cable to the negative terminal of the battery or to the engine or body ground of the vehicle to be started.

Starting the engine

1. Start the engine of the donor vehicle and allow it to run for a few minutes at slightly increased idle speed.
2. Start the engine of the vehicle to be started in the usual manner.
   If the first start attempt is not successful, wait a few minutes before another attempt in order to allow the discharged battery to recharge.
3. Let the engines run for a few minutes.
4. Disconnect the jumper cables by reversing the above connecting sequence.

If necessary, have the battery checked and recharged.

Never use spray fluids to start the engine.◀

TOW-STARTING, TOWING AWAY

Observe applicable laws and regulations for tow-starting and towing.◀

Do not transport any passengers other than the driver in a vehicle that is being towed.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Using a tow fitting

The screw-in tow fitting must always be carried in the car. It can be screwed in at the front or at the right rear.

Depending upon the vehicle features, the tow fitting is located

- under the right or left front seat.
- in the pouch for the tire-changing set in the luggage compartment.

Use only the tow fitting provided with the vehicle and screw it all the way in. Use the tow fitting for towing on paved roads only. Avoid lateral loading of the tow fitting, e.g. do not lift the vehicle by the tow fitting. Otherwise, the tow fitting and the vehicle could be damaged.◀

Access to screw thread

Press sideways on the cover, vehicle outer side. This will push out the opposite side of the cover, which can then be removed.

Front

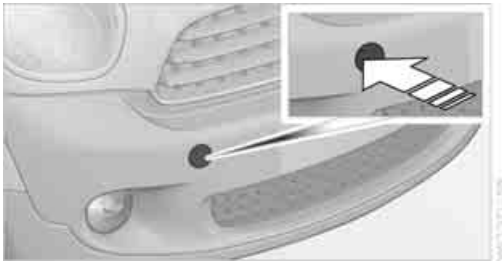

Rear

MINI Countryman:

MINI Paceman:

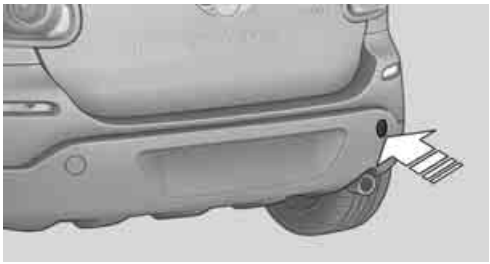

Being towed

Make sure that the ignition is switched on, refer to page 50; otherwise, the low beams, tail lamps, turn signals, and windshield wipers may be unavailable. Do not tow the vehicle with just the rear axle raised, as this would allow the steering to turn.◀

There is no power assist while the engine is off. Thus, braking and steering will require increased effort.

Switch on the hazard warning flashers, depending on local regulations.

Manual transmission

Gearshift lever in neutral position.

Automatic transmission

Tow vehicles with automatic transmission only with a tow truck or with the front wheels lifted; otherwise, the transmission can be damaged.◀

Towing methods

Do not lift vehicle by tow fitting or body and chassis parts, otherwise damage may result.◀

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

With towbar

The towing vehicle must not be lighter than the towed vehicle; otherwise, it may be impossible to maintain control.◀

The tow fittings used should be on the same side on both vehicles. Should it prove impossible to avoid mounting the tow bar at an angle, please observe the following:

- Clearance and maneuvering capability will be sharply limited during cornering.
- The tow bar will generate lateral forces if it is attached offset.

Only attach the tow bar to the tow fittings, as attachment to other vehicle parts can lead to damage.◀

With tow rope

When starting off in the towing vehicle, make sure that the tow rope is taut.

To avoid jerking and the associated stresses on vehicle components when towing, always use nylon ropes or nylon straps. Attach the tow rope to the tow fittings only, as attaching it to other parts of the vehicle could result in damage.◀

With tow truck: vehicles without ALL4 all-wheel drive

MINI Countryman:

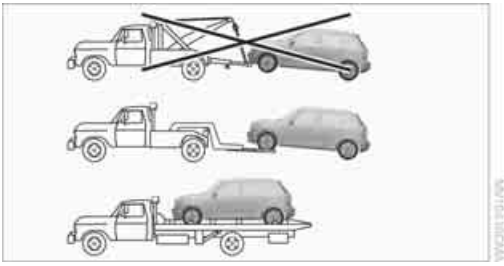

MINI Paceman:

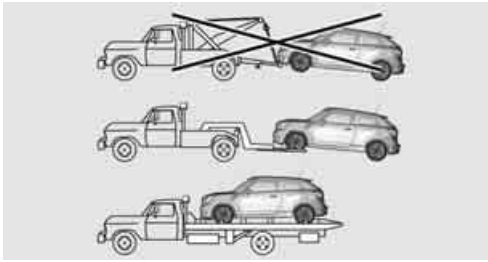

Have the vehicle transported with a tow truck with a so-called lift bar, or on a flatbed.

With tow truck: vehicles with ALL4 all-wheel drive

Do not have your vehicle with ALL4 all-wheel drive towed with the front or rear axle raised individually; otherwise, the wheels may lock and the transfer case may be damaged.◀

MINI Countryman:

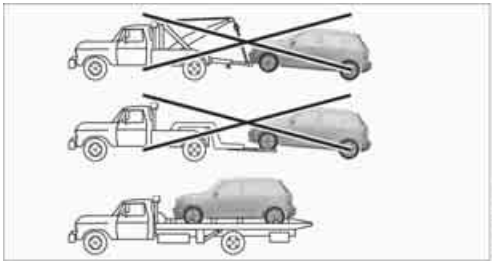

MINI Paceman:

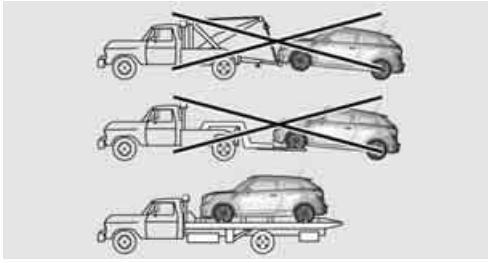

Have the vehicle transported on a flatbed surface only.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Tow-starting

Avoid tow-starting the vehicle whenever possible; instead, jump-start the engine, page 236. Vehicles with a catalytic converter should only be tow-started when the engine is cold, vehicles with an automatic transmission cannot be tow-started at all.

1. Switch on hazard warning flashers, comply with local regulations.
2. Switch on the ignition, page 50.
3. Shift into 3rd gear.
4. Have the vehicle tow-started with the clutch completely depressed and then slowly release the clutch. After the engine starts, immediately depress the clutch completely again.
5. Stop at a suitable location, remove the tow bar or rope and switch off the hazard warning flashers.
6. Have the vehicle checked.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

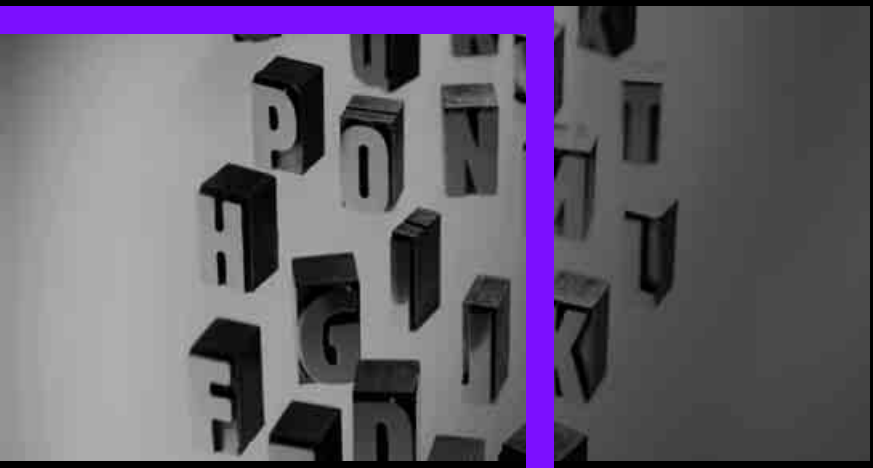

FIND ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

AT A GLANCE

CONTROLS

DRIVING TIPS

NAVIGATION

ENTERTAINMENT

COMMUNICATIONS

MOBILITY

REFERENCE

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

TECHNICAL DATA

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

ENGINE DATA

MINI Countryman

		Cooper	Cooper S	John Cooper Works
Displacement	cu in/ cm^3	97.5/ 1,598	97.5/ 1,598	97.5/ 1,598
Number of cylinders		4	4	4
Maximum power output	hp	121	181	208
At engine speed	rpm	6,000	5,500	6,000
Maximum torque with overboost	lb ft/Nm	114/155 –	177/240 192/260	207/280 221/300
At engine speed with overboost	rpm	4,250 –	1,600-5,000 1,700-4,500	1,900-5,000 2,100-4,500
Overboost briefly raises the maximum torque at high rates of acceleration, e.g. when passing.				

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Paceman

		Cooper	Cooper S
Displacement	cu in/ cm^3	97.5/ 1,598	97.5/ 1,598
Number of cylinders		4	4
Maximum power output	hp	121	181
At engine speed	rpm	6,000	5,500
Maximum torque with overboost	lb ft/Nm	118/160 –	177/240 192/260
At engine speed with overboost	rpm	4,250 –	1,600-5,000 1,700-4,500
Overboost briefly raises the maximum torque at high rates of acceleration, e.g. when passing.			

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

DIMENSIONS

MINI Countryman

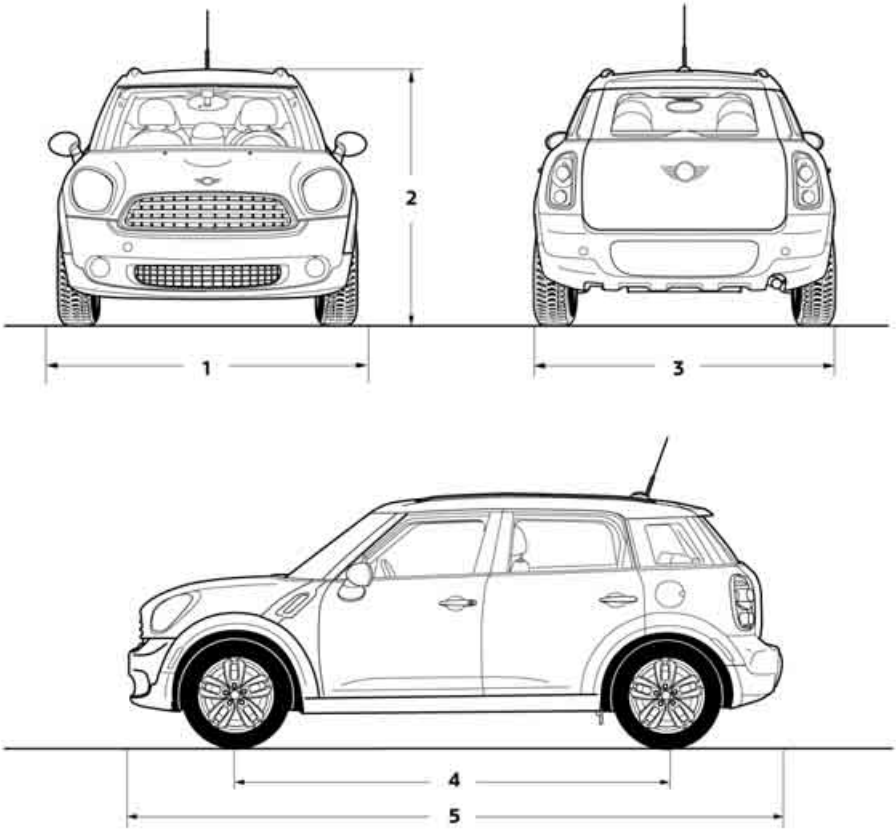

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

		Cooper	Cooper S	John Cooper Works
1	Vehicle width, with outside mirror	78.5/1,995	78.5/1,995	78.6/1,996
2	Vehicle height without roof antenna	61.5/1,561	61.5/1,561	61.5/1,561
3	Vehicle width, without outside mirror	70.4/1,789	70.4/1,789	70.4/1,789
4	Wheelbase	102.2/2,595	102.2/2,595	102.2/2,596
5	Vehicle length	161.7/4,108	161.8/4,110	163.2/4,144
All dimensions in in/mm. Minimum turning radius dia.: 38.1 ft/11.6 m.				

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Paceman

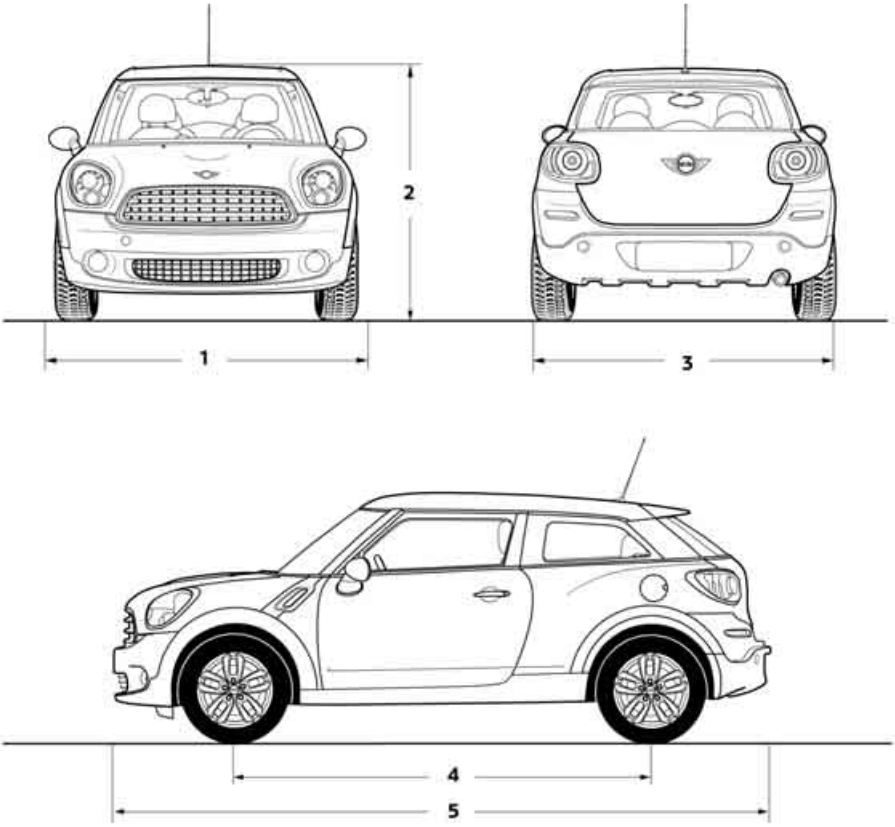

		Cooper	Cooper S
1	Vehicle width, with outside mirror	78.6/1,996	78.6/1,996
2	Vehicle height without roof antenna	59.8/1,518	59.9/1,522
3	Vehicle width, without outside mirror	70.3/1,786	70.3/1,786
4	Wheelbase	102.2/2,596	102.2/2,596
5	Vehicle length	162.2/4,120	162.2/4,120
All dimensions in in/mm. Minimum turning radius dia.: 38.1 ft/11.6 m.			

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

WEIGHTS

MINI Countryman

		Cooper	Cooper S
Curb weight, ready for travel, with all optional extras			
▷ Manual transmission	lbs/kg	2,954/1,340	3,053/1,385
▷ Automatic transmission	lbs/kg	3,020/1,370	3,097/1,405
Approved gross weight			
▷ Manual transmission	lbs/kg	3,858/1,750	3,990/1,810
▷ Automatic transmission	lbs/kg	3,924/1,780	4,034/1,830
Load	lbs/kg	860/390	860/390
Approved front axle load			
▷ Manual transmission	lbs/kg	2,050/930	2,127/965
▷ Automatic transmission	lbs/kg	2,116/960	2,172/985
Approved rear axle load	lbs/kg	1,918/870	1,918/870
Approved roof load capacity	lbs/kg	165/75	165/75
Cargo area capacity	cu ft/ liters	12.4 - 41.3/ 350 - 1,170	12.4 - 41.3/ 350 - 1,170

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

		Cooper S ALL4	John Cooper Works
Curb weight, ready for travel, with all optional extras			
▷ Manual transmission	lbs/kg	3,208/1,455	3,263/1,480
▷ Automatic transmission	lbs/kg	3,252/1,475	3,307/1,500
Approved gross weight			
▷ Manual transmission	lbs/kg	4,101/1,860	4,156/1,885
▷ Automatic transmission	lbs/kg	4,145/1,880	4,200/1,905
Load	lbs/kg	860/390	860/390
Approved front axle load			
▷ Manual transmission	lbs/kg	2,183/990	2,183/990
▷ Automatic transmission	lbs/kg	2,227/1,010	2,227/1,010
Approved rear axle load	lbs/kg	2,017/915	2,072/940
Approved roof load capacity	lbs/kg	165/75	165/75
Cargo area capacity	cu ft/ liters	12.4 - 41.3/ 350 - 1,170	12.4 - 41.3/ 350 - 1,170

Never exceed either the approved axle loads or the gross vehicle weight.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

MINI Paceman

		Cooper	Cooper S	Cooper S ALL4
Curb weight, ready for travel, with all optional extras				
▷ Manual transmission	lbs/kg	2,940/1,334	3,070/1,393	3,210/1,456
▷ Automatic transmission	lbs/kg	3,010/1,365	3,110/1,411	3,260/1,479
Approved gross weight				
▷ Manual transmission	lbs/kg	3,850/1,746	3,960/1,796	4,100/1,860
▷ Automatic transmission	lbs/kg	3,920/1,778	4,010/1,819	4,140/1,878
Load	lbs/kg	850/386	850/386	850/386
Approved front axle load				
▷ Manual transmission	lbs/kg	2,050/930	2,120/962	2,180/989
▷ Automatic transmission	lbs/kg	2,120/962	2,170/984	2,220/1,007
Approved rear axle load	lbs/kg	1,910/866	1,910/866	2,020/916
Approved roof load capacity	lbs/kg	165/75	165/75	165/75
Cargo area capacity	cu ft/ liters	11.6 - 38.1/ 330 - 1080	11.6 - 38.1/ 330 - 1080	11.6 - 38.1/ 330 - 1080

Never exceed either the approved axle loads or the gross vehicle weight.

CAPACITIES

	US gal/US quarts	Liters	Notes
Fuel tank	12.4/–	approx. 47	Fuel grade: page 201
including reserve of	2.1/–	approx. 8	
Window washer system incl. headlamp washer system	–/4.2	approx. 4	For more details: page 57

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

SHORT COMMANDS FOR THE VOICE ACTIVATION SYSTEM

VEHICLE EQUIPMENT

In this chapter, all production, country, and optional equipment that is offered in the model range is described. Equipment is also described that is not available because of, for example, selected options or country version. This also applies to safety related functions and systems.

GENERAL INFORMATION

Instructions for the voice activation system, refer to page 21.

Having the possible spoken commands read aloud: ›Voice commands‹

The following short commands apply to vehicles with voice activation system. They do not work for equipment with which only the mobile phone can be operated by voice.

USEFUL SHORT COMMANDS

Function	Command
Accessing tone control	›Tone‹
Accessing settings	›Settings‹
Accessing the onboard computer	›Onboard info‹
Accessing contacts	›Contacts‹
To display phone book	›Phonebook‹
Accessing services	›Assist‹
Selecting destination entry	›Enter address‹
Selecting route guidance	›Guidance‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CD/MULTIMEDIA

CD drive

Function	Command
Playing a CD	›C D on‹
Selecting a CD	›Select C D‹
Selecting a CD and track	›C D … track …‹ e.g. CD 3 track 5
Selecting a track	›C D track …‹ e.g. track 5
Opening the CD and Multimedia menu	›C D and multimedia‹
CD	›C D‹

External devices

Function	Command
Selecting external devices	›External devices‹

Tone control

Function	Command
Accessing tone control	›Tone‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

RADIO

FM

Function	Command
Selecting the radio	›Radio‹
Selecting FM stations	›F M‹
Selecting manual search	›Manual‹
Selecting the frequency range	›Select frequency‹
Selecting a station	›Select station‹ e.g. W-PLJ

AM

Function	Command
Selecting AM stations	›A M‹
Selecting manual search	›Manual‹

Satellite radio

Function	Command
Selecting the satellite radio	›Satellite radio‹
Switching on the satellite radio	›Satellite radio on‹
Selecting a satellite radio channel	›Select satellite radio‹ e.g. channel 2

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Stored stations

Function	Command
Selecting stored stations	›Presets‹
Choosing a stored station	›Select preset‹
Selecting a stored station	›Preset …‹ e.g. stored station 2

TELEPHONE

Function	Command
Opening the Telephone menu	›Telephone‹
To display phone book	›Phonebook‹
To redial	›Redial‹
Displaying accepted calls	›Received calls‹
Dialing a phone number	›Dial number‹
Displaying the list of messages	›Messages‹
Displaying Bluetooth devices	›Bluetooth‹

OFFICE

Function	Command
Calling up the Office menu	›Office‹
Displaying Current office	›Current office‹
Displaying contacts	›Contacts‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Function	Command
Displaying messages	›Messages‹
Displaying calendar	›Calendar‹
Displaying tasks	›Tasks‹
Displaying reminders	›Reminders‹

Contacts

Function	Command
Accessing contacts	›Contacts‹
My contacts	›My contacts‹
New contact	›New contact‹

NAVIGATION

General information

Function	Command
Navigation menu	›Navigation‹
Selecting destination entry	›Enter address‹
Entering an address	›Enter address‹
Selecting route guidance	›Guidance‹
Starting route guidance	›Start guidance‹
Ending route guidance	›Stop guidance‹
Retrieving home address	›Home address‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Function	Command
Selecting route criteria	›Route preference‹
Selecting route	›Route information‹
Switching on the voice instructions	›Switch on voice instructions‹
Repeating a voice instruction	›Repeat voice instructions‹
Switching off the voice instructions	›Switch off voice instructions‹
Displaying the address book	›Address book‹
Displaying the last destinations	›Last destinations‹
Accessing traffic bulletins	›Traffic Info‹
Special destinations	›Points of interest‹

Map

Function	Command
Displaying the map	›Map‹
Map facing north	›Map facing north‹
Map in the direction of travel	›Map in direction of travel‹
Perspective map	›Map perspective view‹
Automatic scaling of the map	›Map with automatic scaling‹
Changing the scale	›Map scale‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Route guidance with intermediate destinations

Function	Command
Entering a new destination	›Enter address‹

VEHICLE INFORMATION

Function	Command
Accessing the onboard computer	›Onboard info‹
Accessing the trip computer	›Trip computer‹
Accessing vehicle information	›Vehicle info‹
Accessing vehicle status	›Vehicle status‹

SETTINGS

Vehicle

Function	Command
Opening the main menu	›Main menu‹
Accessing settings	›Settings‹
Accessing options	›Options‹
Settings on the Control Display	›Control display‹
Accessing time and date settings	›Time and date‹
Accessing language and unit settings	›Language and units‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Function	Command
Accessing speed limit settings	›Speed‹
Activating lighting	›Lighting‹
Selecting the door lock	›Door locks‹

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

EVERYTHING FROM A TO Z

INDEX

A

ABS Antilock Brake System 72
Accepting a call 167, 179
Accessories, see Vehicle equipment 4
Acknowledgment signals for locking/unlocking vehicle 28
Activated-charcoal filter for automatic climate control 91
Adaptive Light Control 85
Adding engine oil 216
Additives
– coolant 217
– engine oil 216
Address, entering 126
Address for navigation
– entering 120, 126
Adjusting temperature inside the car, refer to Air conditioner 88
Adjusting temperature inside the car, refer to Automatic climate control 90
Adjusting the tone during audio operation, refer to Tone control 141
Airbags 81
– sitting safely 38
– warning lamp 83
Air conditioner 88
Air conditioning mode
– air conditioner 88
– automatic climate control 90
– ventilation 92
Air distribution
– automatic 90
– individual 89
– manual 89
Air flow rate 88, 90
– air conditioning system 88
– automatic climate control 90
– heating, ventilation 88
Airing, refer to Ventilation 92
Air pressure, checking, refer to Tire inflation pressure 203
Air recirculation, refer to Recirculated-air mode 89, 90
Air supply
– air conditioner 88
– automatic climate control 90
– ventilation 92
AKI, refer to Fuel grade 201
Alarm system 32
ALL4 all-wheel drive system 74
All-season tires, refer to Winter tires 213
All-wheel drive, refer to ALL4 74
AM, waveband 143
Ambient air, refer to Recirculated-air mode 89, 90
Ambient lighting 87
Antenna, care 220
Antifreeze
– coolant 217
– washer fluid 57
Antilock Brake System ABS 72
Anti-theft alarm system, refer to Alarm system 32
Approved axle loads, refer to Weights 249
Approved engine oils 216
Approved gross vehicle weight, refer to Weights 249
Armrest, refer to Center armrest 97
Arrival time
– computer 62
– route guidance 129
Ashtray 100
Assistant systems, refer to
– Dynamic Stability Control DSC 72
Audio 140
– controls 140
– switching on/off 140
– tone control 141
– volume 141
Audio device, external 97
Automatic
– air distribution 90
– air flow rate 90
– cruise control 58
– headlamp control 84
Automatic climate control 88
– automatic air distribution 90
Automatic transmission with Steptronic 52
– Interlock 53
– overriding selector lever lock 54
– Shiftlock 53
– sport program 54
AUTO program for automatic climate control 90
Auxiliary phone 176
AUX-In, refer to External audio device 97
AUX-In connection 153
Average fuel consumption 61
– setting the units 64
Average speed 62
Avoiding highways for navigation 129
Axle loads, refer to Weights 249

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

B

Background lighting, refer to Ambient lighting 87
Backrests, refer to Seats 39
Backup lamps
– replacing bulb 228
Band-aids, refer to First aid pouch 236
Bar, refer to Tow-starting, towing away 239
Base plate for telephone or mobile phone
– refer to Snap-in adapter 185
Bass sounds, refer to Tone control 141
Battery 233
– disposal 35, 234
– jump-starting 236
– temporary power failure 234
Battery renewal
– remote control 35
Being towed 238
Belts, refer to Safety belts 42
Belt tensioner, refer to Safety belts 42
Beverage holders, refer to Cupholders 100
Black ice, refer to External temperature warning 61
Blower, refer to Air flow rate 88, 90
Bluetooth, activating/deactivating 165, 175
Bluetooth audio 157
– device pairing 158
– disconnecting an audio connection 160
– playback 159
– unpairing device 160
– what to do if... 160
Bottle holders, refer to Cupholders 100
Brake Assist 72
Brake fluid, refer to Service requirements 64
Brake lamps
– replacing bulbs 228
Brake pads, breaking in 104
Brake rotors 106
– brakes 104
– breaking in 104
Brakes
– ABS 72
– breaking in 104
– MINI Maintenance System 218
– parking brake 52
– service requirements 64
Brakes, refer to Braking safely 105
Brake system 104
– breaking in 104
– disc brakes 106
– MINI Maintenance System 218
Breakdown service, refer to Roadside Assistance 236
Breaking in the clutch 104
Break-in period 104
Brightness of Control Display 70
Bulb changing, refer to Lamps and bulbs 224
Button for starting the engine 50
Buttons on the steering wheel 11

C

Calendar 191
– displaying appointment 191
– selecting calendar day 191
California Proposition 65 warning 5
Call
– ending 168, 180
– muting the microphone 181
Calling, refer to Phone numbers, dialing 168, 180
Can holders, refer to Cupholders 100
Capacities 251
Car battery, refer to Vehicle battery 233
Car care 220
Care 220
– car-care products 220
– car washes 220
– CD/DVD drives 223
– high-pressure washers 221
– leather 222
– manual washing 221
– upholstery and fabrics 222
– windows 221
– wiper blades 221
Cargo, securing 112
Cargo area 106
– capacity 249
– Comfort Access 34
– lamp 87
– opening from outside 31
– trunk lid, refer to Tailgate 31
Cargo area, expanding 106
Cargo area lamp 87
Cargo area lid, refer to Tailgate 31
Cargo area partition net, refer to Cargo net 109
Cargo loading 110
– securing cargo 112
– stowing cargo 111
– vehicle 106
Cargo net 109
Car key, refer to Keys/remote controls 26
Carpets, care 222
Car phone
– installation location, refer to Center armrest 97
Car phone, refer to Telephone 164, 174
Car radio, refer to Radio 143
Car wash
– before driving in 52
Car wash, care 220
Car washes 220
Catalytic converter, refer to Hot exhaust system 105

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

CD, audio playback 151
CD player 151
– controls 140
– fast forward/reverse 152
– random order 152
– selecting a track 151
– switching on/off 140
– tone control 141
– volume 141
Center armrest 97
Center brake lamp 229
Center console, refer to Around the center console 14
Center Rail 99
Center Rail, refer to Storage compartments 98
Central locking system 27
– Comfort Access 33
– from inside 30
– from outside 27
– setting unlocking behavior 27
Changing bulbs 224
Changing the language on the Control Display 69
Changing the measurement units on the Control Display 64
Changing wheels 232
Charging the battery 234
Chassis number, refer to Engine compartment 214
Check Control 67
Child restraint fixing system LATCH 47
Child restraint systems 46
Child-safety locks 49
Child seats 46
Chrome parts, care 222
Chrome parts, refer to Care 220
Cigarette lighter 100
Cleaning headlamps 57
– washer fluid 57
Clock
– setting time 66
– 12 h/24 h mode 66
Closing
– from inside 30
– from outside 27
Clothes hooks 100
Cockpit 10
Cold start, refer to Starting the engine 51
Comfort Access 33
– replacing the battery 35
– what to observe before entering a car wash 34
Comfort area, refer to Around the center console 14
Compartment for remote control, refer to Ignition lock 50
Compass 95
Computer 61
– displays on Control Display 62
Condensation, refer to When the vehicle is parked 106
Condition Based Service CBS 218
Configuring settings, refer to Personal Profile 26
Connecting vacuum cleaner, refer to Connecting electrical appliances 101
Consumption, refer to Average fuel consumption 61
Contacts 171, 188
– new contact 189
Continuing route guidance 129
Control Display
– adjusting brightness 70
Control Display, refer to iDrive
– switching on/off 16
Control Display, refer to Onboard computer 16
– adjusting brightness 70
Controls and displays 10
Control stick, refer to Onboard computer 16
Control unit, refer to Onboard computer 16
Convenience operation
– windows 28
Convenient access, refer to Comfort Access 33
Convenient start, refer to Starting the engine 51
Coolant 217
– checking level 217
– filling 217
– temperature 217
Cooling, maximum 91
Cooling fluid, refer to Coolant 217
Copyright 2
Cornering light, refer to Adaptive Light Control 85
Criteria for route 129
Cruise control
– indicator lamp 13
Cruising range 61
Cupholders 100
Curb weight, refer to Weights 249
Current fuel consumption 62
Current playback
– external devices 156

D

Dashboard, refer to Cockpit 10
Dashboard instruments, refer to Displays 12
Dashboard lighting, refer to Instrument lighting 86
Data 244
– capacities 251
– dimensions 246
– engine 244
– weights 249
Date
– setting 67
– setting format 67
Daytime running lights 85

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

DBC Dynamic Brake Control, refer to Brake Assist 72
Deactivating front passenger airbags 82
Deadlocking, refer to Locking 28
Defect
– door lock 29
Defective
– fuel filler flap 200
Defining a home address 189
Defogging windows 89, 91
Defrosting windows 89, 91
Defrosting windows and removing condensation
– air conditioner 89
– automatic climate control 91
Defrosting windshield, refer to Defrosting windows 89, 91
Defrost position, refer to Defrosting windows 89, 91
Deleting contacts 173, 190
Destination address
– entering 120, 126
Destination for navigation
– entering 120
– entering via map 125
Differential, breaking in 104
Digital compass 95
Digital radio, refer to HD Radio 144
Dimensions 246
Dipstick, engine oil 215
Directional indicators, refer to Turn signals 55
Direction announcements, refer to Voice instructions 133
Direction instructions, refer to Voice instructions 133
Directory for navigation, refer to Address book 122
Displacement, refer to Engine data 244
Display, refer to Onboard computer controls 16
Displaying contact pictures 190
Displaying contacts 172
Displaying special destinations 125
Display lighting, refer to Instrument lighting 86
Displays 12
– instrument combination 12
– on the Control Display 16
Displays, care 223
Displays and controls 10
Disposal
– of coolant 217
– remote control battery 35
– vehicle battery 234
Distance, refer to Computer 62
Distance remaining to service, refer to Service requirements 64
Distance to destination, refer to Computer 62
Distance warning, refer to Park Distance Control PDC 71
Door key, refer to Integrated key/remote control 26
Door lock 29
Door lock, confirmation signals 28
Doors, manual operation 29
DOT Quality Grades 210
Drinks holders, refer to Cupholders 100
Drive-off assistant, refer to Hill Assist 74
Driving dynamics control, refer to Sport button 74
Driving lamps, refer to Parking lamps/low beams 84
Driving notes 104
Driving off on inclines, refer to Hill Assist 74
Driving stability control systems 72
Driving through water 105
Driving tips, refer to Driving notes 104
Dry air, refer to Cooling function 91
DSC Dynamic Stability Control 72
DTC Dynamic Traction Control 73
Dynamic Brake Control DBC, refer to Brake Assist 72
Dynamic route guidance 136
Dynamic Stability Control DSC 72
Dynamic Traction Control DTC 73

E

Editing a contact 172
Eject button, refer to Buttons on the CD player 140
Electrical malfunction
– door lock 29
– fuel filler flap 200
Electronic brake-force distribution 72
Electronic Stability Program ESP, refer to Dynamic Stability Control DSC 72
E-mail 191
Emergency operation, refer to Manual operation
– door lock 29
– fuel filler flap 200
– transmission lock, automatic transmission 54
Emergency services, refer to Roadside Assistance 236
Ending a call 168, 180
Engine
– breaking in 104
– data 244
– overheated, refer to Coolant temperature 217
– speed 244
– starting, Comfort Access 33
Engine compartment 214
Engine coolant, refer to Coolant 217

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Engine malfunction
– indicator lamp 13
Engine oil
– additives, refer to Approved engine oils 216
– alternative oil types 216
– approved engine oils 216
– capacity 216
– checking level 215
– dipstick 215
– intervals between changes, refer to Service requirements 64
– MINI Maintenance System 218
Engine oil level, checking 215
Engine output, refer to Engine data 244
Engine starting, refer to Starting the engine 51
Entering destination 120
Entering intersection 121
Entertainment sound output on/off 140
Entry map for destination 125
ESP Electronic Stability Program, refer to Dynamic Stability Control DSC 72
Exhaust system, refer to Hot exhaust system 105
Exterior mirrors 44
– adjusting 44
– automatic dimming feature 45
– automatic heating 45
– folding in and out 44
External audio device 97
External audio device, refer to AUX-In connection 153
External care 220
External devices
– random play sequence 156
– Software update 161
External temperature display
– change units of measure 64
– in the onboard computer 64
External temperature warning 61
Eyes
– for tow-starting and towing away 238
– for tying down loads 112

F

Failure messages, refer to Check Control 67
Failure of an electrical consumer 234
Fastening safety belts, refer to Safety belts 42
Fastest route for navigation 129
Fast forward
– CD player 152
Fault messages, refer to Check Control 67
Faulty
– tire 76
Filter
– microfilter/activated-charcoal filter for automatic climate control 91
– microfilter for air conditioner 89
Fine wood, care 223
First aid pouch 236
Fixture for remote control, refer to Ignition lock 50
Flash when locking/unlocking 28
Flat load floor 109
Flat tire
– run-flat tires 212
– Tire Pressure Monitor TPM 77
Flat Tire Monitor FTM 75
– indicating a flat tire 76
– initializing the system 75
– snow chains 75
– system limits 75
Flat tires, refer to Tire condition 211
Floor mats, care 222
Floor plate, refer to Flat load floor 109
FM, waveband 143
Fog lamps
– replacing bulb 226
Folding rear seat backrest 106
Footbrake, refer to Braking safely 105
Footwell lamps 87
For your own safety 4
Four-wheel drive, refer to ALL4 74
Front airbags 81
Front fog lamps 86
– replacing bulb 226
Front seat adjustment 39
Frost on windows, refer to Defrosting windows 89, 91
FTM, refer to Flat Tire Monitor 75
Fuel 201
– gauge 60
– high-quality brands 201
– quality 201
– specifications 201
– tank capacity 251
Fuel clock, refer to Fuel gauge 60
Fuel consumption display
– average fuel consumption 61
Fuel display, refer to Fuel gauge 60
Fuel filler flap 200
– releasing in the event of electrical malfunction 200
Fuses 234

G

Garage door opener, refer to Integrated universal remote control 93
Gasoline
– refer to Average fuel consumption 61
Gasoline, refer to Required fuel 201

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Gasoline display, refer to Fuel gauge 60
Gear indicator
– automatic transmission with Steptronic 53
Gear shifting
– automatic transmission 53
– manual transmission 52
Gearshift lever
– automatic transmission with Steptronic 53
– manual transmission 52
General driving notes 104
Glass roof, electric 35
– convenience operation 28
– opening, closing 35
– remote control 28
– tilting 35
Glove compartment 97
GPS navigation, refer to Navigation system 118
Gross vehicle weight, refer to Weights 249

H

Halogen lamps
– replacing bulb 225
Handbrake, refer to Parking brake 52
Hands-free device Bluetooth 164
Hands-free system 14, 171, 183
Hazard warning flashers 14
HD Radio 144
Head airbags 81
Headlamp control, automatic 84
Headlamp flasher 55
– indicator lamp 11, 13, 88, 91
Headlamp glass lens 225
Headlamps
– replacing bulb 225
Headlamps, care 221
Head Light, refer to Adaptive Light Control 85
Head restraints 41
– sitting safely 38
Heated
– mirrors 45
– rear window 89, 91
– seats 42
Heating
– mirrors 45
– rear window 89, 91
– seats 42
Heavy loads, refer to Stowing cargo 111
Height, refer to Dimensions 246
Height adjustment
– seats 39
– steering wheel 45
High beams 86
– headlamp flasher 86
– indicator lamp 13, 88, 91
– replacing bulb 225
High water, refer to Driving through water 105
Highway, refer to Route criteria 129
Hill Assist 74
Hills 106
Holders for cups 100
Homepage 4
Hood 215
Horn 10
Hot exhaust system 105
Hydroplaning 105

I

IBOC, refer to HD Radio 144
Ice warning, refer to External temperature warning 61
Ignition 50
– switched off 51
– switched on 50
Ignition key, refer to Integrated key/remote control 26
Ignition key position 1, refer to Radio readiness 50
Ignition key position 2, refer to Ignition on 50
Ignition lock 50
Imprint 2
Incoming call 167, 179
Indicator and warning lamps 13
– Tire Pressure Monitor TPM 78
Indicator lighting, refer to Instrument lighting 86
Individual air distribution 89
Individual settings, refer to Personal Profile 26
Inflation pressure monitoring, refer to Tire Pressure Monitor TPM 77
Information
– on another location 124
– on current position 124
– on destination location 124
Initializing
– Flat Tire Monitor FTM 75
– glass roof, electric 36
– radio, refer to Station, storing 144
Initializing the
– compass, see Calibration 96
Instructions for navigation system, refer to Voice instructions 133
Instrument lighting 86
Instrument panel, refer to Cockpit 10
Instrument panel, refer to Displays 12
Integrated key 26
Integrated universal remote control 93
Interactive map 126
Interesting destination for navigation 124
Interior lamps 87
– remote control 28
Interior rearview mirror 45
– automatic dimming feature 45
Interlock 53

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Intermittent mode of the wipers 56
Internal care 222
Internet page 4

J

Jacking points 232
Jets, refer to Window washer nozzles 57
Joystick, refer to Onboard computer 16
Jumpering, refer to Jump-starting 236
Jump-starting 236

K

Key, refer to Keys/remote controls 26
Keyless-Go, refer to Comfort Access 33
Keyless opening and closing, refer to Comfort Access 33
Key Memory, refer to Personal Profile 26
Keypad dialing 169, 181
Kickdown 53
– automatic transmission with Steptronic 53
Knock control 201

L

Lamps, refer to Parking lamps/ Low beams 84
Lamps and bulbs, replacing bulbs 224
Lashing eyes, refer to Securing cargo 112
Last destinations 123
LATCH child restraint fixing system 47
Leather care 222
LEDs light-emitting diodes 225
Length, refer to Dimensions 246
License plate lamp
– bulb replacement 229
Light
– automatic headlamp control 84
Light alloy wheels, care 222
Light-emitting diodes LEDs 225
Lighter 100
– socket 101
Lighting
– lamps and bulbs 224
– of the instruments 86
– of vehicle, refer to Lamps 84
Light switch 84
Limit, refer to Speed limit 69
Load 110
Load securing equipment, refer to Securing cargo 112
Lock buttons of doors, refer to Locking 30
Locking
– adjusting confirmation signal 28
– from inside 30
– from outside 28
– without remote control, refer to Comfort Access 33
Locking and unlocking doors
– confirmation signals 28
– from inside 30
– from outside 27
Longlife oils
– approved motor oils 216
Low beams 84
– automatic 84
– replacing bulb 225
Lower back support, refer to Lumbar support 40
Luggage compartment
– doors, refer to Tailgate 31
Luggage compartment partition net, refer to Cargo net 109
Luggage rack, refer to Roof-mounted luggage rack 112
Lumbar support 40

M

M+S tires, refer to Winter tires 213
Main menu 17
Maintenance, refer to Service and Warranty Information Booklet for US models and Service Guide Booklet for Canadian models
Maintenance system 218
Malfunction warnings, refer to Check Control 67
Manual air distribution 89
Manual mode
– automatic transmission with Steptronic 54
Manual operation
– door lock 29
– fuel filler flap 200
– transmission lock, automatic transmission 54
Manual transmission 52
Manual washing 221
Map
– changing scale 132
Map for navigation
– entering destination 125
Master key, refer to Integrated key/remote control 26
Maximum cooling 91
Maximum speed
– with winter tires 213
Medical assistance, refer to First aid pouch 236
MENU button 16
Menus, refer to Onboard computer 16
Messages 190
Microfilter
– for air conditioner 89
– for automatic climate control 91
– MINI Maintenance System 218

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Microfilter/activated-charcoal filter
– MINI Maintenance System 218
Microphone for telephone 14
MINI Connected 195
MINI Internet page 4
MINI joystick, refer to Onboard computer 16
MINI Maintenance System 218
Mirror dimming feature 45
Mirrors 44
– exterior mirrors 44
– heating 45
– interior rearview mirror 45
Mobile phone
– adjusting volume 167, 179
– connecting, refer to Mobile phone, pairing 164, 175
– installation location, refer to Center armrest 97
– pairing 164, 175
– what to do if.... 166, 178
Mobile phone, installation location, refer to Center armrest 97
Mobile phone preparation Bluetooth 174
Mobility Kit 230
Modifications, technical, refer to For your own safety 4
Monitor, refer to MINI controls with navigation 16
Monitoring system for tire pressures, refer to Flat Tire Monitor 75
Multifunctional steering wheel, refer to Buttons on the steering wheel 11
Multifunction switch
– refer to Turn signals/ headlamp flasher 55
– refer to Wiper system 55

N

Navigation
– storing current position 122
Navigation data 118
Navigation destination
– entering manually 120, 126
– home address 123
Navigation instructions, refer to Switching voice instructions on/off 133
Navigation system 118
– address book 122
– bypassing a route section 130
– continuing route guidance 129
– destination entry 120
– dynamic route guidance 136
– entering a destination manually 120, 126
– planning a trip 127
– route list 130
– selecting destination via map 125
– selecting route criteria 129
– special destinations 124
– starting route guidance 129
– terminating route guidance 129
– voice instructions 133
– volume adjustment 133
Neck support, refer to Head restraints 41
Nets, refer to Storage compartments 98
New tires 212
North-facing map 131
Notes 192
Number of cylinders, refer to Engine data 244
Number of safety belts 38
Nylon rope, refer to Tow rope 239

O

OBD socket, refer to Socket for On-Board Diagnosis 219
Octane ratings, refer to Fuel specifications 201
Odometer 61
Office 187
– current office 187
– what to do if.... 193
Oil, refer to Engine oil 215
Oil consumption 215
Oil level 215
Oil types 216
Old batteries, refer to Disposal 234
Onboard computer 16
– changing language 69
– menu guidance 17
– operating principles 16
– overview 16
– status information 19
Opening and closing
– Comfort Access 33
– from inside 30
– from outside 27
– using the door lock 29
– using the remote control 27
Opening and unlocking
– from inside 30
Options, selecting for navigation 129
Orientation menu, refer to Main menu 17
Outlets
– refer to Ventilation 92
Output, refer to Engine data 244
Outside-air mode
– automatic climate control 90
Overheated engine, refer to Coolant temperature 217

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

P

Paintwork, care 221
Park Distance Control PDC 71
Parking
– vehicle 51
Parking aid, refer to Park Distance Control PDC 71
Parking brake 52
– indicator lamp 13
Parking lamps, replacing bulb 226
Parking lamps/low beams 84
Parts and accessories, see Vehicle equipment 4
Pathway lighting 85
Personal Profile 26
Phone numbers
– dialing 168, 180
Pinch protection system
– windows 37
Plastic parts, care 223
Pollen
– refer to Microfilter/activated-charcoal filter for automatic climate control 91
– refer to Microfilter for air conditioner 89
Power failure 234
Power window
– safety switch 37
Power windows 36
Power windows, refer to Windows 36
Pressure, tires 203
Pressure monitoring, tires 75
– Flat Tire Monitor 75
Pressure monitoring of tires, refer to Tire Pressure Monitor TPM 77
Protective function, refer to Pinch protection system
– windows 37
Puncture
– Flat Tire Monitor 75

R

Radio
– controls 140
– HD Radio 144
– satellite radio 145
– storing stations 144
– tone control 141
– volume 141
– waveband, selecting 143
Radio key, refer to Integrated key/remote control 26
Radio position, refer to Radio readiness 50
Radio readiness 50
– switched off 51
– switched on 50
Rain sensor 56
Random play sequence
– external devices 156
Range, refer to Cruising range 61
Reading aloud 193
Reading lamps 87
Rear lamps
– bulb replacement 228
Rear lamps, refer to Tail lamps 228
Rear-mounted luggage rack 113
Rear seat backrest, folding 106
Rear seats
– adjusting 40
– folding down the backrests 106
Rearview mirror
– compass 95
Rearview mirror, refer to Mirrors 44
Rear window
– windshield wiper 57
Rear window defroster 89, 91
Rear window safety switch 37
Reception
– quality 144
– radio station 144
Recirculated-air mode 89, 90
Recirculation of air, refer to Recirculated-air mode 89, 90
Reclining seat, refer to Backrest 39
Refueling 200
Rejecting a call 168, 180
Releasing
– hood 215
Reminders 192
Remote control 26
– battery renewal 35
– Comfort Access 33
– garage door opener 93
– malfunctions 29, 34
– service data 218
– tailgate 28
Replacement remote control 26
Replacing bulbs, refer to Lamps and bulbs 224
Replacing tires, refer to New wheels and tires 212
Reporting safety defects 7
Reserve warning, refer to Fuel gauge 60
Reservoir for washer systems 57
Reset, refer to Resetting tone settings 142
Restraint systems
– for children 46
– refer to Safety belts 42
Reverse
– CD player 152
Reverse gear
– automatic transmission with Steptronic 53
– manual transmission 52
Road map 131
Roadside Assistance 236
Roadside parking lamps 86
– replacing bulb 226
Road worthiness test, refer to Service requirements 64

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Roof load capacity 249
Roof-mounted luggage rack 112
Rope, refer to Tow-starting, towing away 239
Route 129, 130
– bypassing sections 130
– changing 129, 130
– changing criteria 129
– displaying arrow view 130
– displaying map view 131
– displaying streets or towns/ cities 130
– selecting 129
Route guidance 129
– bypassing a route section 130
– changing specified route 129
– distance and arrival 129
– voice instructions 133
– volume of voice instructions 133
Route section, changing 130
Route selection 129
RSC Run-flat System Component, refer to Run-flat tires 212
Rubber parts, care 222
Run-flat System Component RSC, refer to Run-flat tires 212
Run-flat tires 212
– flat tire 76
– Flat Tire Monitor 76
– tire inflation pressure 203
– tire replacement 212
– winter tires 213

S

Safety belt
– number 38
Safety Belt Reminder 44
Safety belts 42
– center belt 43
– damage 44
– indicator lamp 44
– reminder 44
– sitting safely 38
Safety belts, care 223
Safety systems
– airbags 81
– Antilock Brake System ABS 72
– driving stability control systems 72
– Dynamic Stability Control DSC 72
– safety belts 42
Safety tires, refer to Run-flat tires 212
Satellite radio 145
– channel, activating or deactivating 146
– channel, selecting 146
– channel, storing 147
– favorites 148
– time shift 147
– Traffic Jump 149
Screen, refer to Onboard computer controls 16
Screw thread for tow fitting 238
SDARS, refer to Satellite radio 145
Seat adjustment
– mechanical 39
– rear 40
Seats 39
– adjusting the seats 39
– heating 42
– sitting safely 38
Securing the vehicle
– from inside 30
– from outside 27
Selecting navigation system 118
Selecting new scale for navigation 132
Selector lever
– automatic transmission with Steptronic 53
Selector lever lock
– automatic transmission with Steptronic, refer to Shiftlock 53
– overriding manually 54
Selector lever positions
– automatic transmission with Steptronic 53
Service, refer to Roadside Assistance 236
Service car, refer to Roadside Assistance 236
Service data in the remote control 218
Service Interval Display, refer to Condition Based Service CBS 218
Service requirement display, refer to Condition Based Service CBS 218
Service requirements 64
Settings
– clock, 12 h/24 h mode 66
– date format 67
– language 69
Settings and information 62
Setting time and date 66
Setting time zone, time, and date 66
Shifting gears
– automatic transmission with Steptronic 54
– manual transmission 52
Shiftlock
– automatic transmission, refer to Changing selector lever positions 53
Shift paddles 54
Short commands for the voice activation system 252
Short route in navigation, refer to Selecting route 129

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Shuffled, refer to Random
– CD player 152
Side airbags 81
Side marker lamps, replacing bulbs 227
Side turn signal
– replacing bulb 227
Side windows, refer to Windows 36
Signal horn, refer to Horn 10
Sitting safely 38
– airbags 38
– safety belts 38
– with head restraint 38
Size, refer to Dimensions 246
Sliding/tilt sunroof
– refer to Glass roof, electric 35
Slot for remote control 50
Smokers' package, refer to Ashtray 100
Snap-in adapter
– inserting/removing 185
– use 174
Snap-in adapter, refer to Center armrest storage compartment 97
Snow chains 213
Socket, refer to Connecting electrical appliances 101
Socket for On-Board Diagnosis OBD 219
Software update 161
Speaking, refer to Voice instructions from navigation system 133
Special destinations 124
Special oils, refer to Approved engine oils 216
Speed 244
– with winter tires 213
Speed limit 69
– setting 69
Speed limit warning, refer to Speed limit 69
Speedo, refer to Speedometer 12
Speedometer 12
Speed volume 141
Split rear seat backrest, refer to Expanding the cargo area 106
Sport button 74
Stability control, refer to Driving stability control systems 72
Start/Stop button 50
– starting the engine 51
– switching off the engine 51
Starting, refer to Starting the engine 51
Starting assistance, refer to Jump-starting 236
Starting route guidance 129
Starting the engine 51
– Start/Stop button 50
Start-off assistance, refer to
– DSC 72
– Hill Assist 74
State/province, for navigation 120
Station, selecting
– radio 143
Status information on the Control Display 19
Status of this Owner's Manual at time of printing 4
Steering wheel 45
– adjustment 45
– buttons on steering wheel 11
– lock 50
– shift paddles 54
Steptronic, refer to Automatic transmission with Steptronic 52
Storage area
– cargo area 106
Storage compartments 98
Storage space
– storage compartments 98
Storing a destination in the address book 122
Storing the vehicle 223
Storing tires 213
Stowage, refer to Storage compartments 98
Summer tires, refer to Wheels and tires 203
SW, waveband 143
Switches, refer to Cockpit 10
Switching off
– engine 51
Switching off the engine 51
– Start/Stop button 50
Switching on
– audio 140
– CD player 140
– radio 140
Switching radio on/off 140
Switching the cooling function on and off 91
Symbols 4
– status information 19

T

Tachometer 60
Tailgate 31
– Comfort Access 34
– opening/closing 31
– opening from outside 31
– unlocking with remote control 28
Tail lamp, refer to Tail lamps 228
– replacing bulb 228
Tail lamps 228
Tank volume, refer to Capacities 251
Target cursor for navigation 125
Tasks 192
Technical data 244
Technical modifications 4

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Telephone
– hands-free system 171, 183
– installation location, refer to Center armrest 97
– voice commands 183
Telephone receiving power, refer to Status information 19
Temperature display
– setting the units 64
Temperature of coolant, refer to Coolant temperature 217
Temperature setting
– air conditioner 89
– automatic climate control 91
Tempomat, refer to Cruise control 58
Tensioning straps, refer to Securing cargo 112
Text message 190
Third brake lamp, refer to Center brake lamp 229
Three-point safety belt 42
Tightening the lug bolts
– torque 233, 234
Tightening torque, refer to Tightening lug bolts 233
Tire failure
– Flat Tire Monitor 76
– indicator/warning lamp 76
– MINI Mobility Kit 230
– run-flat tires 76
– Tire Pressure Monitor 77
Tire inflation pressure 203
– loss 76, 77
Tire pressure monitoring, refer to Flat Tire Monitor 75
Tire Pressure Monitor TPM 77
– limitations of system 77
– resetting system 78
– warning lamp 78
Tire Quality Grading 210
Tires
– age 212
– breaking in 104
– changing, refer to Changing wheels 232
– condition 211
– damage 211
– inflation pressure 203
– inflation pressure loss 78
– minimum tread depth 211
– new tires 212
– pressure monitoring, refer to Flat Tire Monitor 75
– pressure monitoring, refer to Tire Pressure Monitor TPM 77
– puncture 76
– size 210
– wear indicators, refer to Minimum tread depth 211
– winter tires 213
– with emergency operation properties 212
Tires with emergency operation properties, refer to Run-flat tires 212
Tires with safety features, refer to Run-flat tires 212
TMC station, refer to Traffic information 133
Tone
– middle setting 142
Tone during audio playback
– adjusting 141
Torque 244
– lug bolts 233
Tow bar 239
Tow fitting 238
– screw thread 238
Tow fittings for tow-starting and towing away 238
Towing 237
– car with automatic transmission 238
– methods 239
Tow rope 239
Tow-starting 237
TPM, refer to Tire Pressure Monitor 77
Track
– selecting on CD 151
Track width, refer to Dimension 246
Traction control, refer to
– Dynamic Stability Control DSC 72
Traffic bulletins
– categories 135
Traffic bulletins, filtering 135
Traffic congestion
– displaying traffic information 133
– refer to Route, bypassing segments 130
Traffic information for navigation
– displaying 134
Traffic information in navigation
– screen display in the map view 135
Transmission
– automatic transmission with Steptronic 52
– manual transmission 52
– overriding selector lever lock for automatic transmission with Steptronic 54
Transporting children safely 46
Transport securing devices, refer to Securing cargo 112
Tread depth, refer to Minimum tire tread 211
Treble, refer to Tone control 141
Trip computer 62
Trip-distance counter, refer to Trip odometer 61
Triple turn signal activation 55
Trip odometer 61

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Turning circle, refer to Dimensions 246
Turn signal
– front, replacing bulb 226
– indicator lamp 12, 13
– rear, replacing bulb 228
– side, replacing bulb 227
Turn signals 55
Tying down loads, refer to Cargo loading 112

U

Uniform Tire Quality Grading UTQR 210
Units
– average fuel consumption 64
– temperature 64
Universal garage door opener, refer to Integrated universal remote control 93
Universal remote control 93
Unlatching, refer to Unlocking 33
Unlocking
– from inside 30
– from outside 27
– setting unlocking behavior 27
– tailgate 34
– without remote control, refer to Comfort Access 33
Updating the navigation data 118
Upholstery, care 222
USB audio interface 154
USB interface 97
Using contact data 193

V

Vehicle
– battery 233
– breaking in 104
– cargo loading 106
– dimensions 246
– identification number, refer to Engine compartment 214
– parking 51
– storage 223
– weight 249
Vehicle jack
– jacking points 232
Ventilation
– air conditioner 92
Ventilation, refer to Climate control 88
Vents, refer to Ventilation 92
Voice commands
– overview 21
– short commands 252
– telephone 183
Voice instructions for navigation system 133
– repeating 133
– switching on/off 133
– volume 133
Voice phone book 184
Volume 140
– audio sources 140
– mobile phone 167, 179
– voice instructions 133
Volume balance, tone setting 141
Volume of cargo area 249

W

Warning and indicator lamps 13
Warning messages, refer to Check Control 67
Warning triangle 236
Washer/wiper system
– washer fluid 57
Washer fluid 57
– capacity of reservoir 58
Washer fluid reservoir 57
Waste tray, refer to Ashtray 100
Waterfall lighting, refer to Ambient lighting 87
Water on roads, refer to Driving through water 105
Waveband for radio 143
Wear indicators in tires, refer to Minimum tread depth 211
Weights 249
Welcome lamps 85
Wheelbase, refer to Dimensions 246
Wheels, new 212
Wheels and tires 203
Width, refer to Dimensions 246
Windows 36
– closing 36
– convenience operation 28
– opening 36
– pinch protection system 37
– safety switch 37
Windows, indicator on Control Display 16
Window washer, refer to Washer fluid 57
Window washer reservoir, refer to Washer fluid
– volume, refer to Capacities 251
Window washer system 55
– washer fluid 57
– washer jets 57
Windshield
– cleaning 57
– defrosting and removing condensation 89, 91
Windshield wiper blades, changing 224
Windshield wipers, refer to Wiper system 55

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

Winter tires 213
– setting speed limit 69
– storage 213
Wiper blade replacement 224
Wiper system 55
Word matching principle for navigation 128
Work in the engine compartment 215

X

Xenon lamps
– replacing bulb 225

Online Edition for Part no. 01402917368 - © 10/12 BMW AG

01 40 2 917 368 ue

DRIVE ME.

Online Edition for Part no. 01402917368 - © 10/12 BMW AG